

Holding Cabinet

| Project |
|-------------------|
| Item |
| Quantity |
| CSI Section 11400 |
| Approved |
| Date |
| Date |

Models

- 86002 MHC-22, 120 volt holding cabinet
- 86003 MHC-22, 230 volt, CE version holding cabinet



86002

Standard Features

- Conduction heat
- Independent upper and lower heating system
- Cool touch insulation
- · Small footprint
- · Stainless steel construction
- · Digital display for each bin
- · 6-hour timer with Audible Alarm
- · Programmable menu
- · Individual heat zone for each bin
- Removable back for pass-through application
- · One year parts and labor warranty

Options & Accessories

- Additional single handle pan
- Double handled pan for pass-thru applications
- Pan inserts
- Under shelf mounting brackets

Specifications

Merco Holding Cabinet keeps food hot, fresh and ready for easy assembly! Allows more flexibility in holding options for greater menu variety - go ahead, prepare and hold food prior to serving. The easy to maintain design and simple operation features reduced employee time spent on cleaning and training; increasing customer satisfaction by providing higher product quality (a great sandwich) in a shorter amount of time (increased speed.)

Conduction Heat: directly transfers heat from both top & bottom with minimal heat loss. Provides consistent quality, improved freshness and extended hold times.

Cool Touch Insulation: keeps exterior surfaces cool while food is held at proper serving temps.

 $\textbf{Small Footprint:} \ \text{allows cabinet to fit in small operations.}$

Stackable: up to two high allows operators to customize and use in larger operations.

Stainless Steel Construction: sturdy, sanitary & reliable.

Pre-Attached Stainless Steel Covers: sealed bins to prevent moisture loss. Removable for cleaning.

Programmable Menu: easy to use symbols on control panel. Digital time, temp and product display for each individual bin with 6-Hour timer and audible alarm.

Each cavity holds two 1/3 size poly-carbonate bins for total of 4 bins and menu options.

Electrical Requirements: Model 86002 is available in 120 Volt; 60 Hz, 1250 Watts at 10.4 Amps. 12' cord and NEMA 5-15P plug included. Model 86003 is available in 230 Volt; 50 Hz, 1250 Watts at 5.5 Amps. 8' cord and CEE 7/7 plug included.














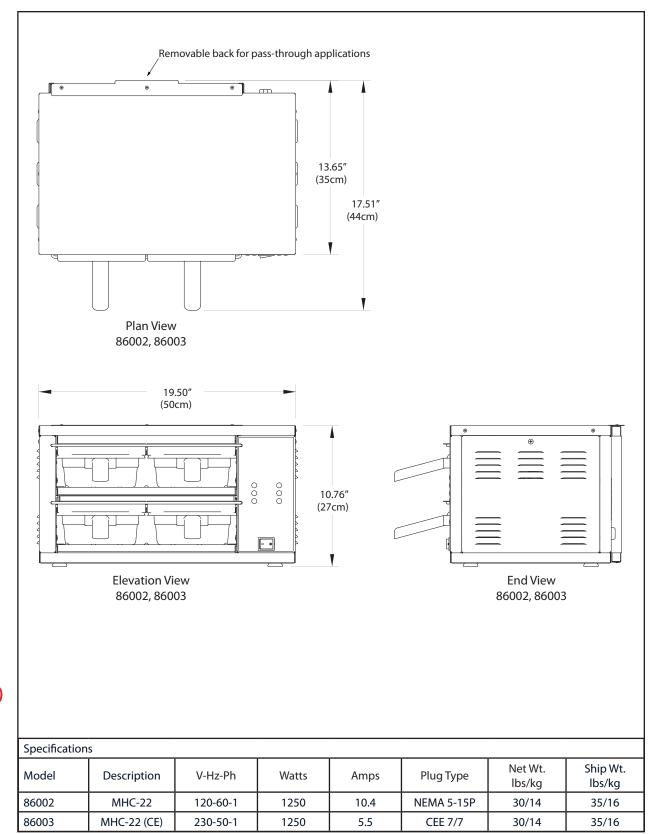

Merco reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.mercoproducts.com Printed in the U.S.A. DSMOMHC 12/12

