



# Glass Door Merchandisers

Hinged Door Coolers

Project \_\_\_\_\_

Item \_\_\_\_\_

Quantity \_\_\_\_\_

CSI Section 11400

Approved \_\_\_\_\_

Date \_\_\_\_\_

## Models

- Model DMER26-G - 26ft<sup>3</sup> capacity hinged door cooler
- Model DMER49-G - 49ft<sup>3</sup> capacity hinged door cooler
- Model DMER65-G - 65ft<sup>3</sup> capacity hinged door cooler



DMER49-G

## Standard Features

- Blue top header sign standard
- Forced air evaporator for quick temperature pull down
- Heavy duty hinges with automatic return
- Attractive PVC frame
- Unit sits upon adjustable levelers
- Double paned Low-e glass door
- Four heavy duty shelves
- Built in door handle
- Robust body with 2-1/4" thick walls, injected with CFC-free polyurethane
- Exterior cabinet made of galvanized, pre-painted steel, with baked polyester paint
- Listed to NSF-7 for the storage and/or display of packaged or bottled product
- Heavy duty condensing unit for R134a, located in front for easy-access maintenance
- Forced-air condenser made of copper and aluminum, resistant to rust and saline environments
- Reinforced 16-gauge steel base
- One year parts and labor warranty and an additional four year compressor warranty (U.S.A./Canada only)

## Options & Accessories

- Wire shelf kit

## Specifications

**The exterior** is constructed of galvanized, pre-painted steel, with a baked polyester paint. The base is reinforced 16-gauge steel.


**The interior** is an attractive, NSF approved, white interior cabinet. It's robust body is constructed of 2-1/4" thick walls. The entire cabinet structure is insulated with high-density foamed in place CFC-free polyurethane. Innovative LED interior lighting design is protected by safety shielding. Four adjustable heavy duty coated wire shelves are provided.

**Refrigeration System:** Forced air condenser is made of copper and aluminum, resistant to rust and saline solutions. The self-contained refrigeration system uses environmentally friendly (CFC-free) 134A refrigerant. It is located in the front of the unit for easy access. The refrigerant flow is controlled using a capillary tube. Forced air evaporator ensures quick temperature pull-down.

**Door:** Extruded frame door is constructed with Low-E, double pane thermal glass. They are the latest in energy efficient technology. Each door has heavy duty hinges with automatic return. Handle shall be built in.



Glass Door Merchandisers: Hinged Door Coolers

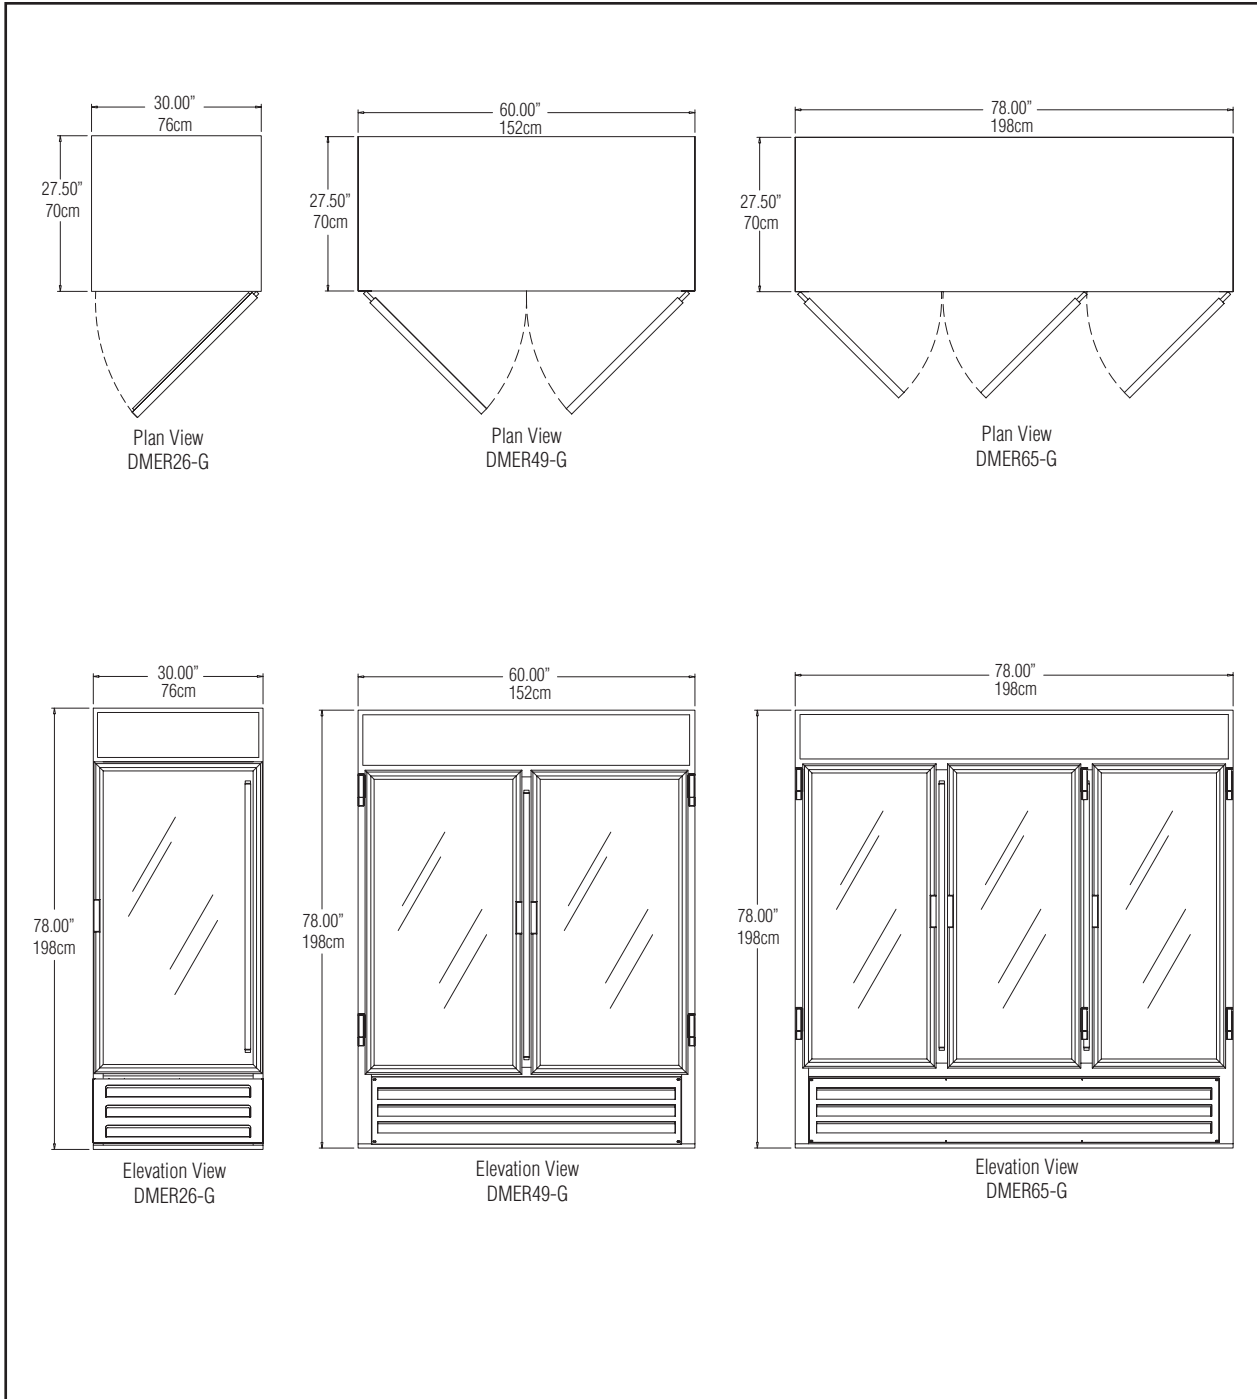

**Specifications**

Model	Capacity	H.P.	Amps	Voltage	Shipping Weight	NEMA Plug	Energy (KWH/Day)
DMER26-G	26 ft <sup>3</sup>	1/3	6.7	115V/60Hz/1Ph	310lbs/141kg	5-15P	3.32
DMER49-G	49 ft <sup>3</sup>	1/2	11.5	115V/60Hz/1Ph	577lbs/262kg	5-15P	NA
DMER65-G	65 ft <sup>3</sup>	3/4	14.0	115V/60Hz/1Ph	720lbs/327kg	5-20P	NA

Delfield reserves the right to make changes to the design or specifications without prior notice.