



F13BC

31.5" (80cm) Deep Self-Contained Low Temp, Ice Cream Cabinets with Syrup Rail

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

F13BC: 31.5" (80cm) Deep Self-Contained Low Temp, Ice Cream Cabinets with Syrup Rail

Models

- F13BC44 44" (112cm) Self-Contained Ice Cream Cabinet with Syrup Rail
- F13BC56 56" (142cm) Self-Contained Ice Cream Cabinet with Syrup Rail
- F13BC72 72" (183cm) Self-Contained Ice Cream Cabinet with Syrup Rail



F13BC56

Standard Features

- Units are standard with unfinished ends
- 16-gauge stainless steel top construction
- 36" standard work height
- Refrigerated raised syrup rail with stainless steel liner to accommodate syrup pumps, chocolate pumps and fruit jars with lids
- High-density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Rail opening maintains 33° to 41° meeting NSF7 requirements
- EPR valve controls the rail temperature
- Ice cream tank is constructed of 2BF stainless steel with large clean out coved bottom
- 0° tank storage temperatures
- Folding removable cover with black rubber external handle for easy grip
- 8' cord and plug

- Unit has two 14-gauge leg rails that run the entire length of the unit
- 6.12" adjustable full stainless steel legs and bullet feet
- Environmentally friendly HFC-404A refrigerant
- One year parts and 90 day labor standard warranty

Options & Accessories

- Stainless steel back
- Stainless steel end
- Laminate facing
- Laminate back
- Laminate end
- Sink and dipperwell (consult factory)
- Dipperwell
- Sink (consult factory)
- 220V/50 cycle electrical

Specifications

Top is constructed of one-piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing on front and 10.4" (26.3cm) full length raised refrigerated syrup rail. Refrigerated rail is furnished with syrup pumps, chocolate pump and fruit jars. Top to be insulated and have raised rim opening(s) provided with cover. Cover(s) are insulated, folding and removable.

Interior is constructed of 22-gauge stainless steel. Liner is insulated with 2.5" (6.4cm) foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Unit has a cold wall refrigeration system and is supplied with a low pressure control for the tank and an evaporator pressure regulating valve for the rail. Unit is designed to maintain 0°F to 5° F (-18°C to -15°C) in the tank and 33°F to 40°F (1°C to 4°C) in the rail.


Exterior front has 22-gauge stainless steel front panel(s). Exterior ends are constructed of 18-gauge galvanized steel. Unit has condensing unit on right end of cabinet and wired

with cord and plug. Housing for condensing unit has a louvered front panel.

Electrical connections are 115 volt, 60 Hertz, single phase.

Unit is mounted on on 6.13" (15.6cm) high adjustable stainless steel legs.



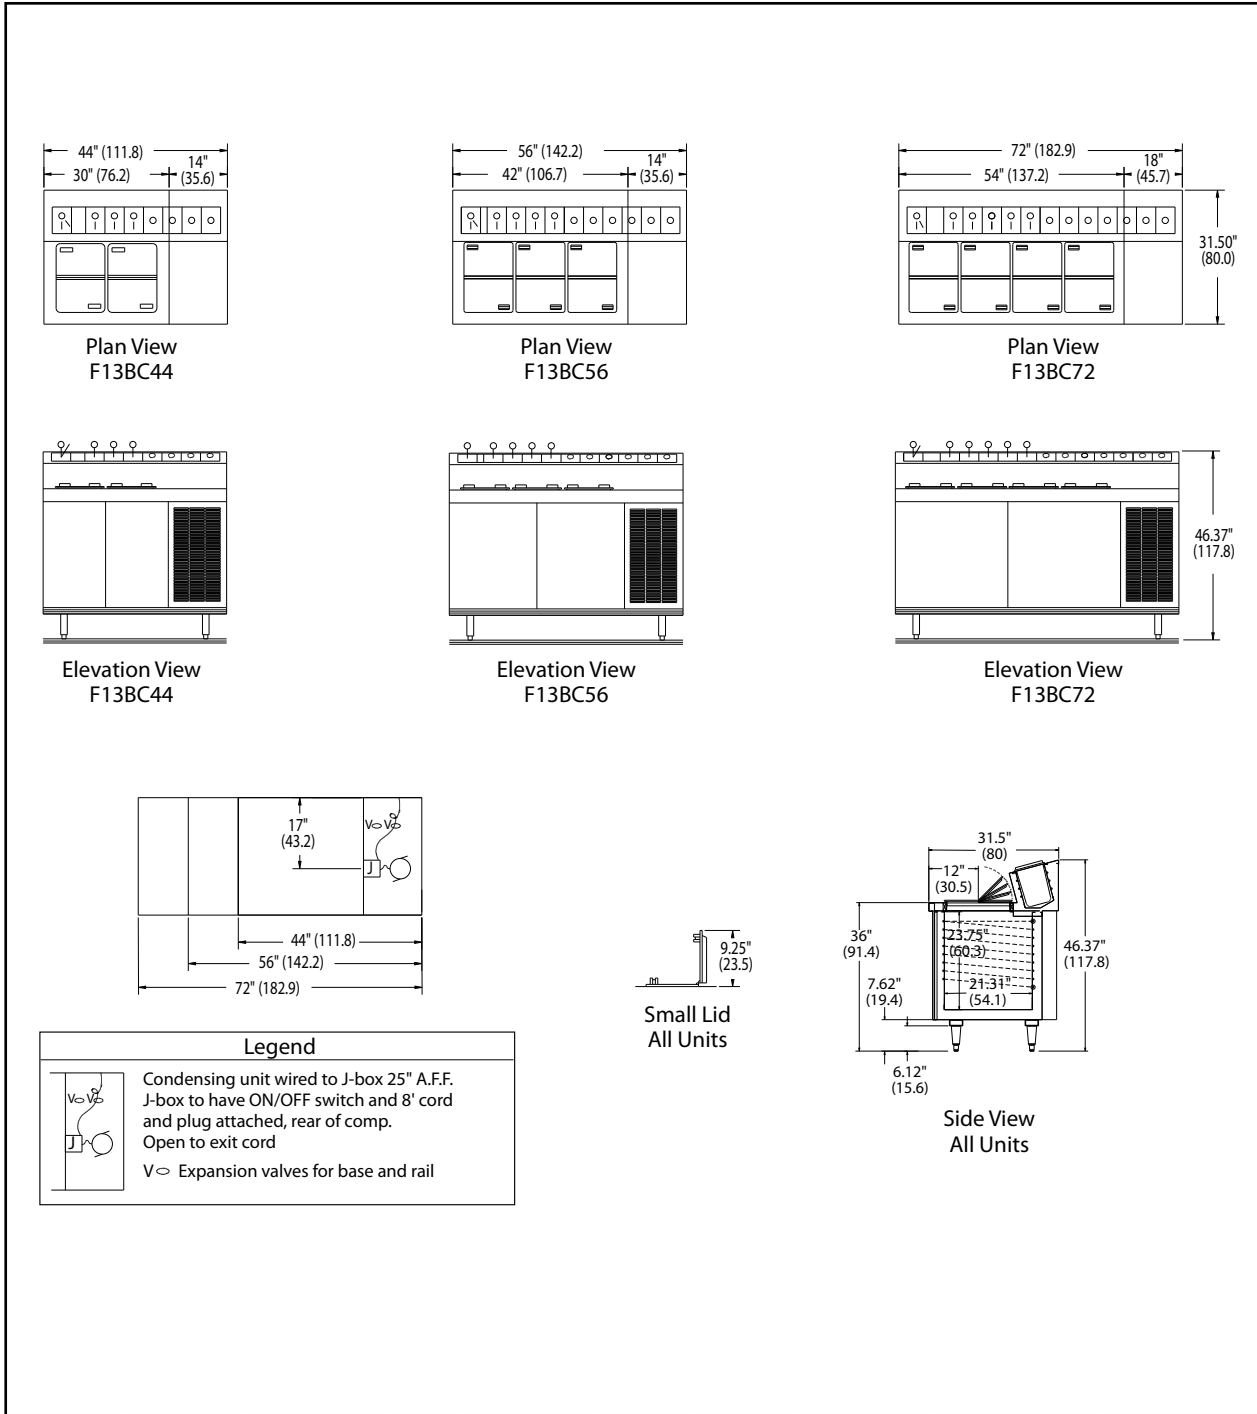

| Specifications | | | | | | | | | |
|----------------|-----------------|------------------|------|----------|------|-----------|-------------------|----------------------|--------------------|
| Model | Gallon Capacity | Number of Covers | H.P. | V/Hz/Ph | Amps | Nema Plug | BTU Load Frz/Rail | BTU Sys Cap Frz/Rail | Ship Weight lbs/kg |
| F13BC44 | 24 | 4 | 1/3 | 115/60/1 | 8.0 | 5-15P | 506/192 | 983/828 | 435/197 |
| F13BC56 | 36 | 6 | 1/3 | 115/60/1 | 8.0 | 5-15P | 638/250 | 1073/979 | 480/218 |
| F13BC72 | 48 | 8 | 1/2 | 115/60/1 | 10.0 | 5-15P | 796/307 | 1309/1174 | 540/245 |

Delfield reserves the right to make changes to the design or specifications without prior notice.