



Global Series Reach-In Refrigerator

- GCR1-G GBR1-G GBSR1-G GCR2-G GBR2-G GBSR2-G
- GCR1-GH GBR1-GH GBSR1-GH GCR2-GH GBR2-GH GBSR2-GH
- GCR3-G GBR3-G GBSR3-G



GCR1-GH



- Top mount refrigeration system featuring TXV expansion valve and hot gas condensate removal
- Digital exterior temperature display with high/low temp visual alarms
- Energy saving LED interior light
- Removable side louver
- Gray epoxy coated shelves (3 per section) with shelf bridge
- Smart door hinge that auto closes up to 90° and stays open past 90°
- Integral door handle
- 180° door opening
- Energy efficient door gasket – removable without tools
- Locking doors
- 5" locking casters shipped loose for field installation
- 10' cord and plug attached

Standard Features of Series GC:

- Stainless steel front shroud
- Mill finish aluminum exterior sides
- Gray coated aluminum interior
- Anodized aluminum interior floor
- 5 position pin shelf support

Standard Features of Series GB/GBS:

- Stainless steel front shroud
- Stainless steel exterior sides
- Gray coated aluminum interior (Series GB)
- Stainless steel interior (Series GBS)
- Stainless steel interior floor
- Field rehingable doors
- Stainless steel pilaster with shelf clips
- Vapor lock relief valve

Refrigeration system: All components are mounted to the top cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R404A refrigerant is used. System has the capability of maintaining between 33°F and 40°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using an electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Units are completely insulated with high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.




MODELS LISTED ON BACK



Delfield
www.delfield.com

Tel: 1.800.733.8948



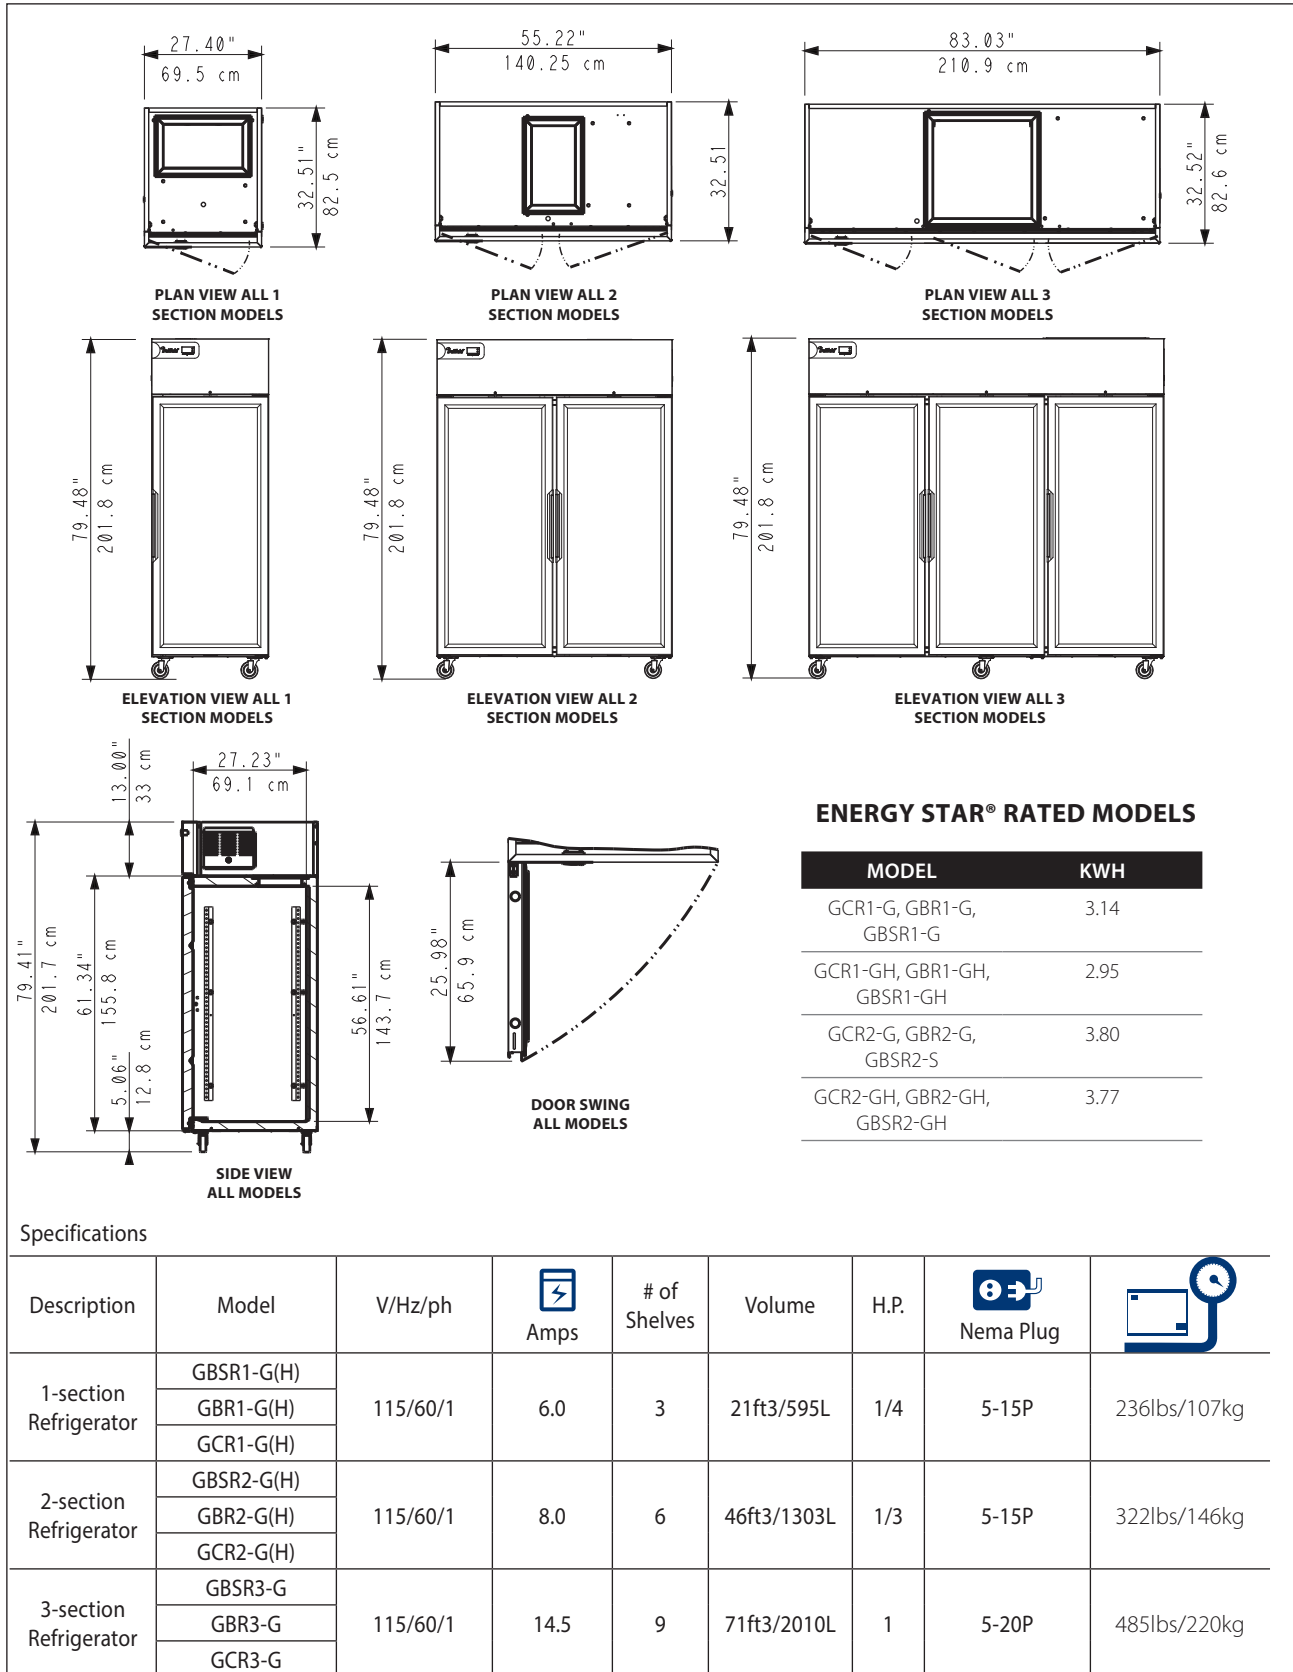

ENERGY STAR® RATED MODELS

MODEL	KWH
GCR1-G, GBR1-G, GBSR1-G	3.14
GCR1-GH, GBR1-GH, GBSR1-GH	2.95
GCR2-G, GBR2-G, GBSR2-S	3.80
GCR2-GH, GBR2-GH, GBSR2-GH	3.77

Specifications

Description	Model	V/Hz/ph	Amps	# of Shelves	Volume	H.P.	Nema Plug	
1-section Refrigerator	GBSR1-G(H)	115/60/1	6.0	3	21ft3/595L	1/4	5-15P	236lbs/107kg
	GBR1-G(H)							
	GCR1-G(H)							
2-section Refrigerator	GBSR2-G(H)	115/60/1	8.0	6	46ft3/1303L	1/3	5-15P	322lbs/146kg
	GBR2-G(H)							
	GCR2-G(H)							
3-section Refrigerator	GBSR3-G	115/60/1	14.5	9	71ft3/2010L	1	5-20P	485lbs/220kg
	GBR3-G							
	GCR3-G							