



Specification Line[®]

Self-Contained Glass Door Heated Pass-Thru

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Specification Line[®]: Glass Door Heated Pass-Thru

Models

One section	Two section	
SSHPT1-GS	SSHPT2-GS	Stainless exterior and interior, glass full door on one side, solid full door on the other side
SSHPT1-GHSH	SSHPT2-GHSH	Stainless exterior and interior, glass half door on one side solid half door on the other side
SAHPT1-GS	SAHPT2-GS	Stainless exterior and aluminum interior, glass full door on one side, solid full door on the other side
SAHPT1-GHSH	SAHPT2-GHSH	Stainless exterior and aluminum interior, glass half door on one side solid half door on the other side
SMHPT1-GS	SMHPT2-GS	Stainless front aluminum exterior and interior, glass full door on one side, solid full door on the other side
SMHPT1-GHSH	SMHPT2-GHSH	Stainless front aluminum exterior and interior, glass half door on one side solid half door on the other side



SSHPT2-GS

Standard Features

- Stainless steel interior and exterior (SS)
- Stainless steel exterior, aluminum interior (SA)
- Aluminum interior and exterior, stainless front (SM)
- Built in door locks with heavy duty strikes
- Exterior digital thermometer with high/low temperature alarm
- Easy to use electronic control
- Easy access removable shroud
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Three chrome plated wire shelves per section
- 6" adjustable stainless steel legs
- Stainless steel breaker strips
- Stainless steel interior door liner
- Three year parts and labor warranty

Options & Accessories

- Security (prison) package
- 6" polyurethane casters
- Door field rehingability
- Additional shelves
- Tray slides
- Laminate on front, sides and back
- Bottom mount electrical
- Stainless steel banking strip
- Heat shield end
- Stainless steel kick plate
- Laminate kick plate
- 4" stainless steel utility base

Specifications

Exterior: SS and SA models shall have corrosion resistant stainless steel exterior cabinet sides, front and shroud. SM models shall have corrosion resistant aluminum on exterior cabinet sides and will have stainless front and shroud. All units have an easily removable shroud to access components on the exterior top of the unit. All switches are accessible from the front of the unit without shroud removal.

Interior: Cabinet interior shall be corrosion resistant stainless steel (SS models) or heavy gauge aluminum (SA and SM models). Bottom and top surfaces shall be die stamped to provide radius corners and recessed floor. Three wire shelves are provided per section, standard shelves are chrome plated. Shelves rest on clips which are adjustable on 1" increments on stainless steel pilasters affixed to the cabinet interior. Pilasters are removable without tools for cleaning. Mounted to the interior ceiling, the interior incandescent light is controlled automatically through a switch mounted in the hinge assembly to protect against breakage. Door openings are protected with heavy gauge stainless steel breaker strips. Horizontal and vertical air ducts are located on the interior top and interior side of the unit. Quantity of one on one section units and two on two and three section units.

Doors: Glass door models have a glass door on one side and a solid door on the other. Double paned tempered thermopane glass. Constructed with a combination of extruded aluminum and PVC. Each door has two edgemount, self-closing, cam lift style hinges. Doors can be removed from the cabinet without the use of tools. Door handle is continuous along vertical dimension of the door. Door gaskets are magnetic and mount to the door, snapping in place and removable with out tools. Keyed door lock is mounted to the door. Lock engages into a heavy duty strike mounted to the cabinet face.


Heating system: Cabinets are designed to maintain temperatures between 120°F and 200°F. Heating elements are located behind the vertical ducts. The design of the heater, which is full length of the vertical duct, allows for optimal air flow and energy efficiency. Fan motor is mounted outside of the heated compartment. System is controlled by an electronic control that is accessible in the front shroud of the unit. On/Off switch is also located in the front shroud.

Electrical: Standard electrical is 208-240 Volt, 60 Hz, single phase. Unit is supplied with cord and NEMA 6-20P plug.



Only Models
SSHPT1-GS,
SAHPT1-GS,
SMHPT1-GS



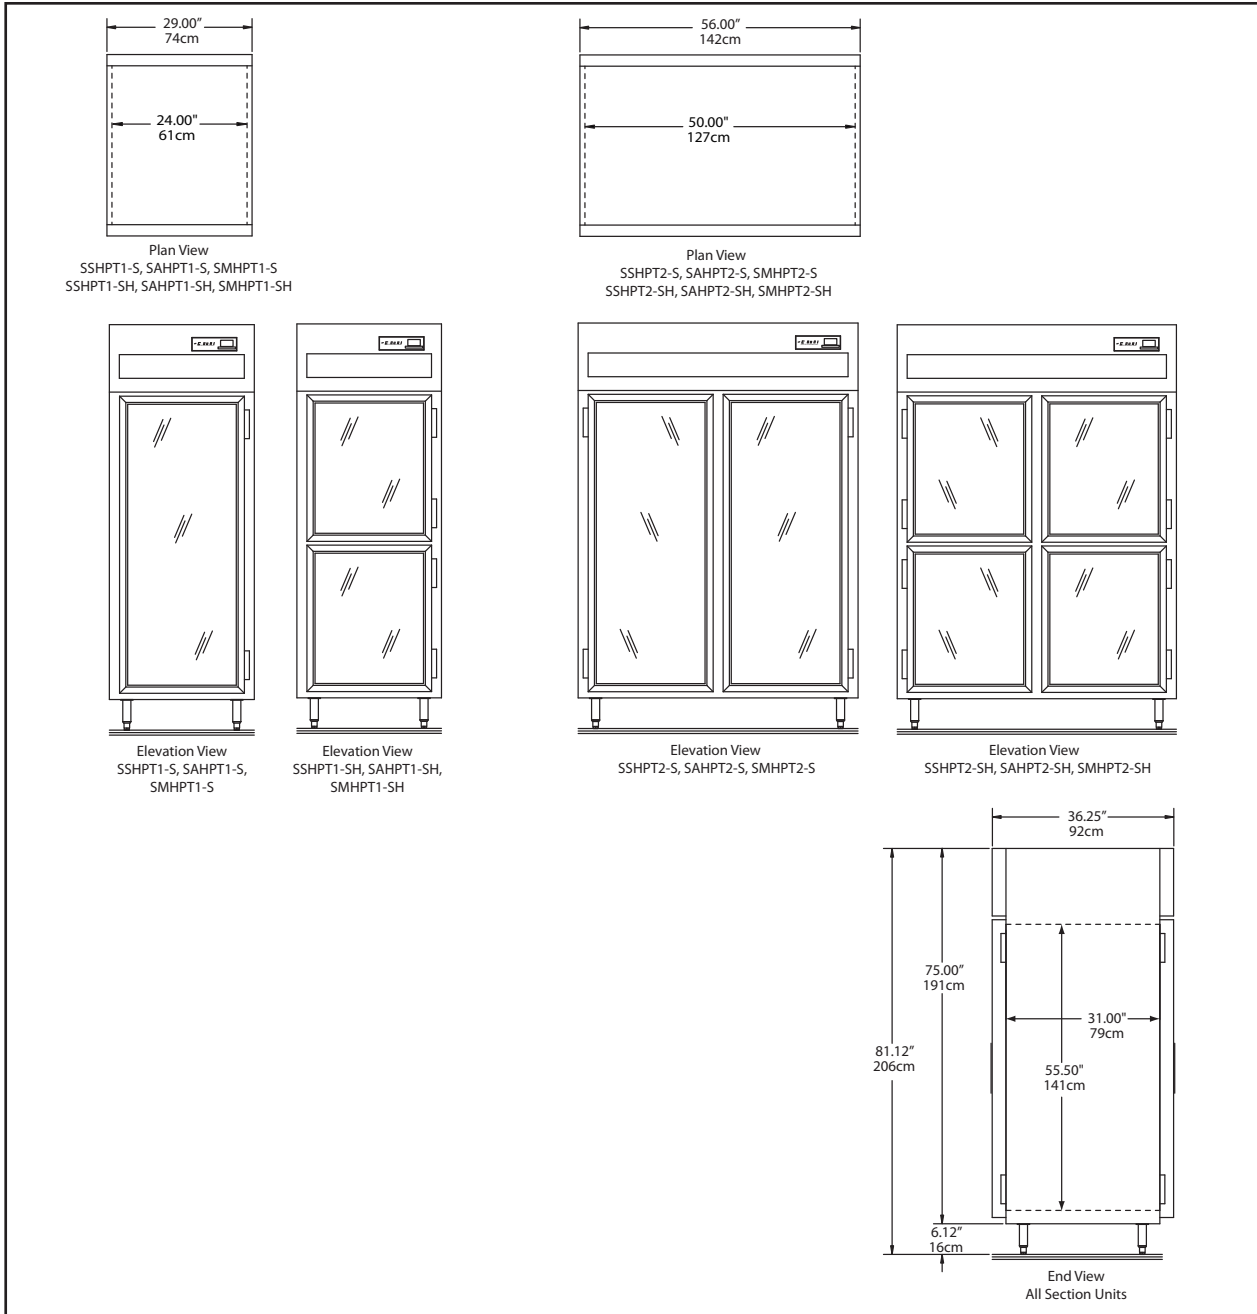

Specifications

Model	V/Hz/Ph	Amps	Volume Cu.Ft. (L)	Shelves Sq.Ft. (Sq.M.)	No. Of Shelves	Ship Weight	Nema Plug	Energy KW/H
SSHPT1-GS, SAHPT1-GS, SMHPT1-GS	208-240/60/1	6.0	26.96 (763)	12.81 (1.19)	3	398lbs (181kg)	6-20P	298
SSHPT1-GHSH, SAHPT1-GHSH, SMHPT1-GHSH	208-240/60/1	6.0	26.96 (763)	12.81 (1.19)	3	398lbs (181kg)	6-20P	N/A
SSHPT2-GS, SAHPT2-GS, SMHPT2-GS	208-240/60/1	10.5	51.92 (1470)	27.54 (2.56)	6	650lbs (295kg)	6-20P	553
SSHPT2-GHSH, SAHPT2-GHSH, SMHPT2-GHSH	208-240/60/1	10.5	51.92 (1470)	27.54 (2.56)	6	650lbs (295kg)	6-20P	N/A

Delfield reserves the right to make changes to the design or specifications without prior notice.