



Specification Line®

Self-Contained Solid Door Heated Roll-In

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

<u>One section</u>	<u>Two section</u>	<u>Three section</u>	
SSHRI1-S	SSHRI2-S	SSHRI3-S	Stainless exterior and interior full door
SAHRI1-S	SAHRI2-S	SAHRI3-S	Stainless exterior and aluminum interior full door
SMHRI1-S	SMHRI2-S	SMHRI3-S	Stainless front aluminum exterior and interior full door



SSHRI2-S

Standard Features

- Stainless steel interior and exterior (SS)
- Stainless steel exterior, aluminum interior (SA)
- Aluminum interior and exterior, stainless front (SM)
- Built in door locks with heavy duty strikes
- Recessed metal door handle
- Exterior digital thermometer with high/low temperature alarm
- Easy to use electronic control
- Easy access removable shroud
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Stainless steel breaker strips
- Stainless steel interior door liner
- Three year parts and labor warranty

Options & Accessories

- Security (prison) package
- Door field rehingability
- Stainless steel back
- Laminate on front, sides and back
- Bottom mount electrical
- Stainless steel banking strip
- Heat shield end

Specifications

Exterior: SS and SA models shall have corrosion resistant stainless steel exterior cabinet sides, front and shroud. SM models shall have corrosion resistant aluminum on exterior cabinet sides and will have stainless front and shroud. All units have galvanized backs and an easily removable shroud to access components on the exterior top of the unit. All switches are accessible from the front of the unit without shroud removal.

Interior: Cabinet interior shall be corrosion resistant stainless steel (SS models) or heavy gauge aluminum (SA and SM models). Bottom and top surfaces shall be die stamped to provide radius corners and recessed floor. Mounted to the interior ceiling, the interior incandescent light is controlled automatically through a switch mounted in the hinge assembly to protect against breakage. Door openings are protected with heavy gauge stainless steel breaker strips. Horizontal and vertical air ducts are located on the interior top and interior side of the unit. Quantity of one on one section units and two on two and three section units.

Each section can accommodate a 28.5" x 27.25" x 70.5" cart.


Doors: Exterior shall be corrosion resistant stainless steel. Interior liner shall be stainless steel. Each door has two edge mount, self closing, cam lift style hinges. Doors can be removed from the cabinet without the use of tools. Metal door handle shall be recessed into the door for easy grip without impacting aisle space. Keyed door lock is mounted in the door next to the handle. Lock engages into a heavy duty strike mounted to the cabinet face. Door gaskets are magnetic and mount to the door snapping in place and are removable without tools.

Heating system: Cabinets are designed to maintain temperatures between 120°F and 200°F. Heating elements are located behind the vertical ducts. The design of the heater, which is full length of the vertical duct, allows for optimal air flow and energy efficiency. Fan motor is mounted outside of the heated compartment. System is controlled by an electronic control that is accessible in the front shroud of the unit. On/Off switch is also located in the front shroud.

Electrical: Standard electrical is 208-240 Volt, 60 Hz, single phase. Unit is supplied with cord and NEMA 6-20P plug.



Specification Line®: Solid Door Heated Roll-In

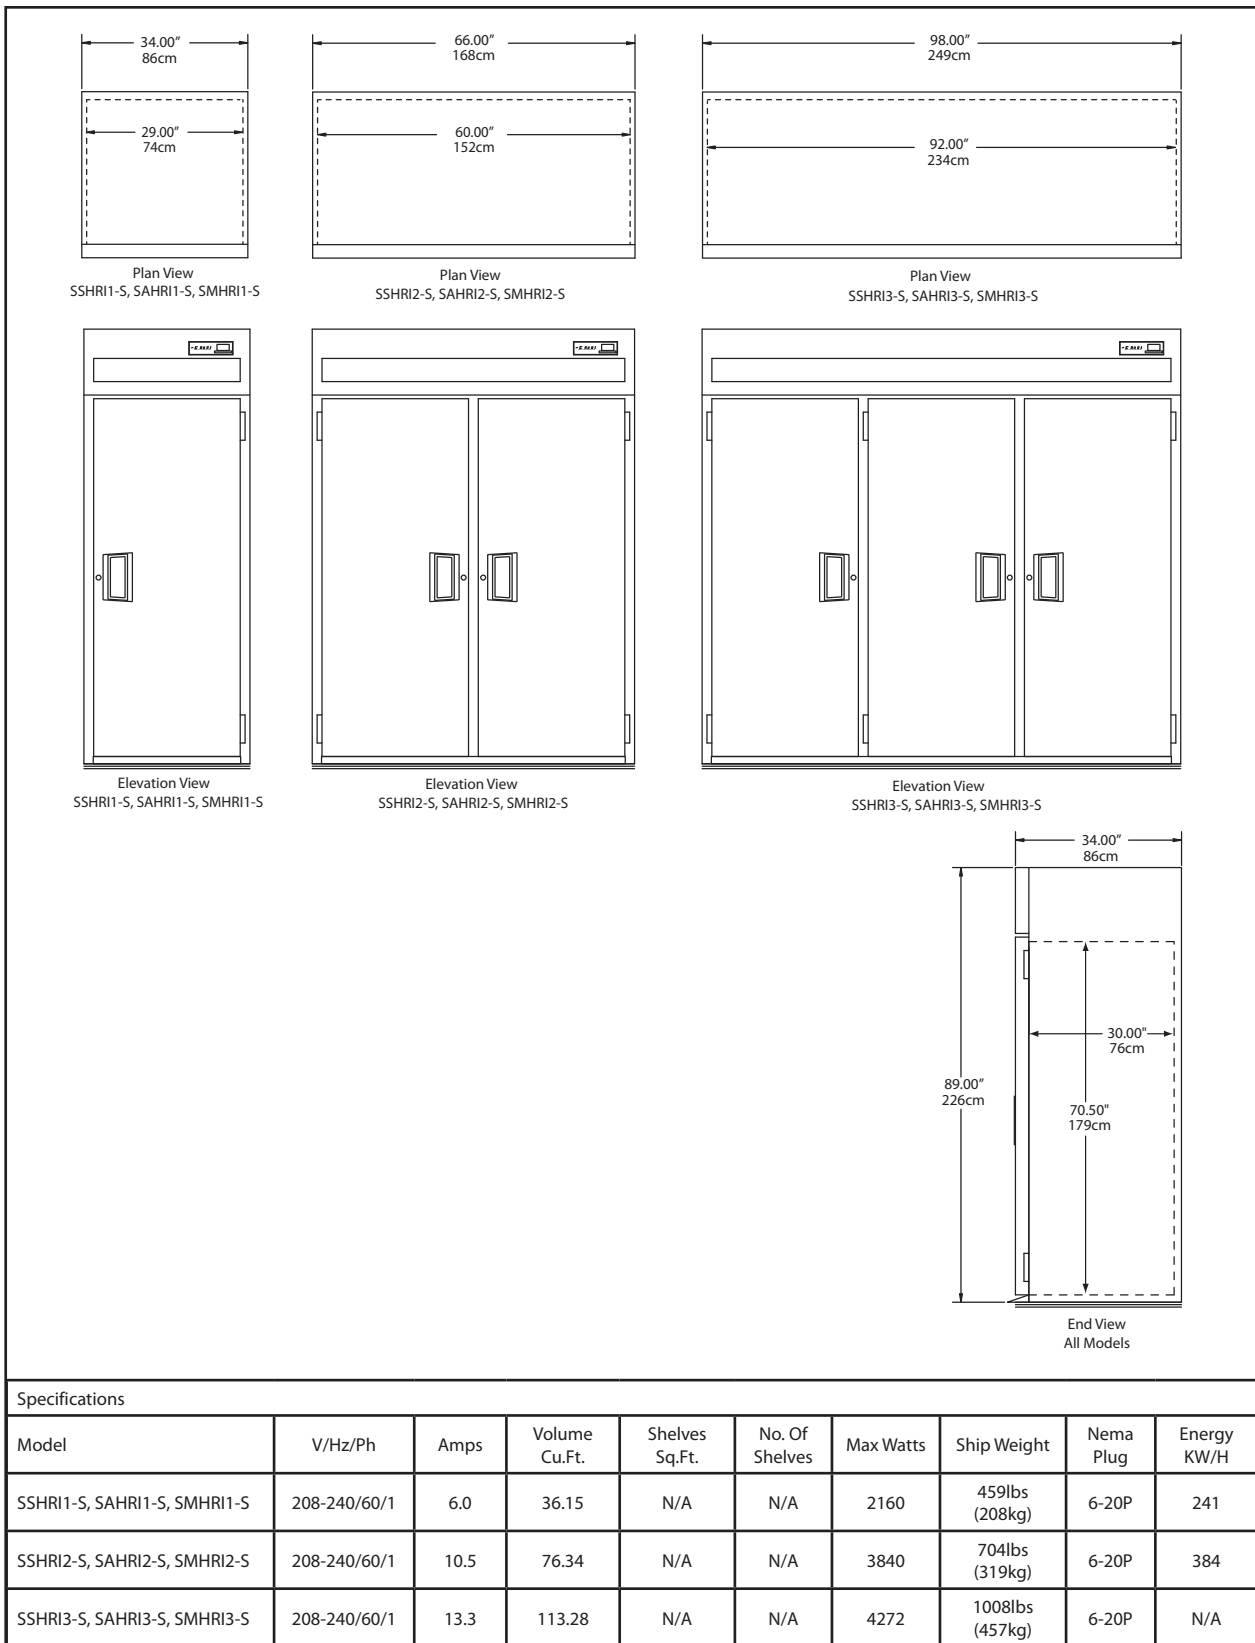

Delfield reserves the right to make changes to the design or specifications without prior notice.