



# Specification Line<sup>®</sup>

Self-Contained Solid Door Wine Cabinet Reach-In

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

Specification Line<sup>®</sup>: Solid Door Wine Cabinet Reach-In

## Models

One section	Two section	Three section	
SSW1-S	SSW2-S	SSW3-S	Stainless exterior and interior full door
SSW1-SH	SSW2-SH	SSW3-SH	Stainless exterior and interior half door
SAW1-S	SAW2-S	SAW3-S	Stainless exterior and aluminum interior full door
SAW1-SH	SAW2-SH	SAW3-SH	Stainless exterior and aluminum interior half door
SMW1-S	SMW2-S	SMW3-S	Stainless front aluminum exterior and interior full door
SMW1-SH	SMW2-SH	SMW3-SH	Stainless front aluminum exterior and interior half door



SSW2-SH

## Standard Features

- Stainless steel interior and exterior (SS)
- Stainless steel exterior, aluminum interior (SA)
- Stainless steel door and upper housing, aluminum interior and exterior (SM)
- Built in door locks with heavy duty strikes
- Recessed metal door handle
- Pressure relief valve is standard to prevent door vapor lock
- Exterior digital thermometer with high/low temperature alarm
- Easy to use electronic control
- Easy access "flip up" shroud
- Three chrome plated wine shelves per section
- 10' attached cord and plug
- 6" adjustable stainless steel legs
- Stainless steel breaker strips
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Energy savings door heater switch
- Two year parts & labor warranty
- Five year compressor warranty

## Options & Accessories

- Stainless steel interior door liner
- Door field rehingability
- 6" polyurethane casters
- Additional shelves
- Tray slides
- Stainless steel back
- Laminate on front, sides and back
- Bottom mount electrical
- Stainless steel banking strip
- Heat shield end
- Stainless steel kick plate
- Laminate kick plate
- 4" stainless steel utility base

## Specifications

**Exterior:** Cabinet exterior sides, front and shroud shall be corrosion resistant stainless steel (SS & SA series). Exterior sides shall be aluminum (SM series). Upper shroud shall be hinged, with stay-open feature to provide easy access to refrigeration system.

**Interior:** Cabinet interior shall be corrosion resistant stainless steel (SS models) or heavy gauge aluminum (SA models). Bottom and top surfaces are die stamped to provide radius corners and recessed floor. Three chrome plated wine shelves are provided per section. Shelves rest on clips which are adjustable in 1" increments on stainless steel pilasters affixed to the cabinet interior. Each section can hold up to 8 wine shelves. Each wine shelf holds 10 to 12 bottles. Pilasters are removable without tools for cleaning. Interior incandescent light mounted to the interior ceiling is controlled automatically through a switch mounted in the hinge assembly to protect against breakage. Door openings are protected with heavy gauge stainless steel breaker strips. An air duct is mounted to the ceiling assuring low velocity, even air movement throughout the cabinet interior.

**Doors:** Exterior shall be corrosion resistant stainless steel. Interior liner shall be resilient high impact ABS material, formed to protrude beyond the door gasket to protect the gasket from tearing. Each door has two edge mount, self closing, cam lift style hinges. Doors can be removed from cabinet without the use of tools. Metal door handle is recessed into the door for easy grip without impacting aisle space. Keyed door lock is mounted in the door next to the handle. Lock

engages into a heavy duty strike mounted to the cabinet face. Door gaskets are magnetic and mount to the door snapping in place and are removable without tools.

**Refrigeration system:** All components are mounted to the exterior cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R404A refrigerant is used. System has the capability of maintaining between 50°F and 60°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using Delfield's ACT-Advanced Control Technology electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption.

Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.


**Electrical:** Standard electrical connections shall be 115V, 60Hz, single phase. A 10' cord and plug is supplied attached to a junction box mounted on the exterior top of the cabinet.





Self-Contained Solid Door Wine Cabinet Reach-In

Specification Line®

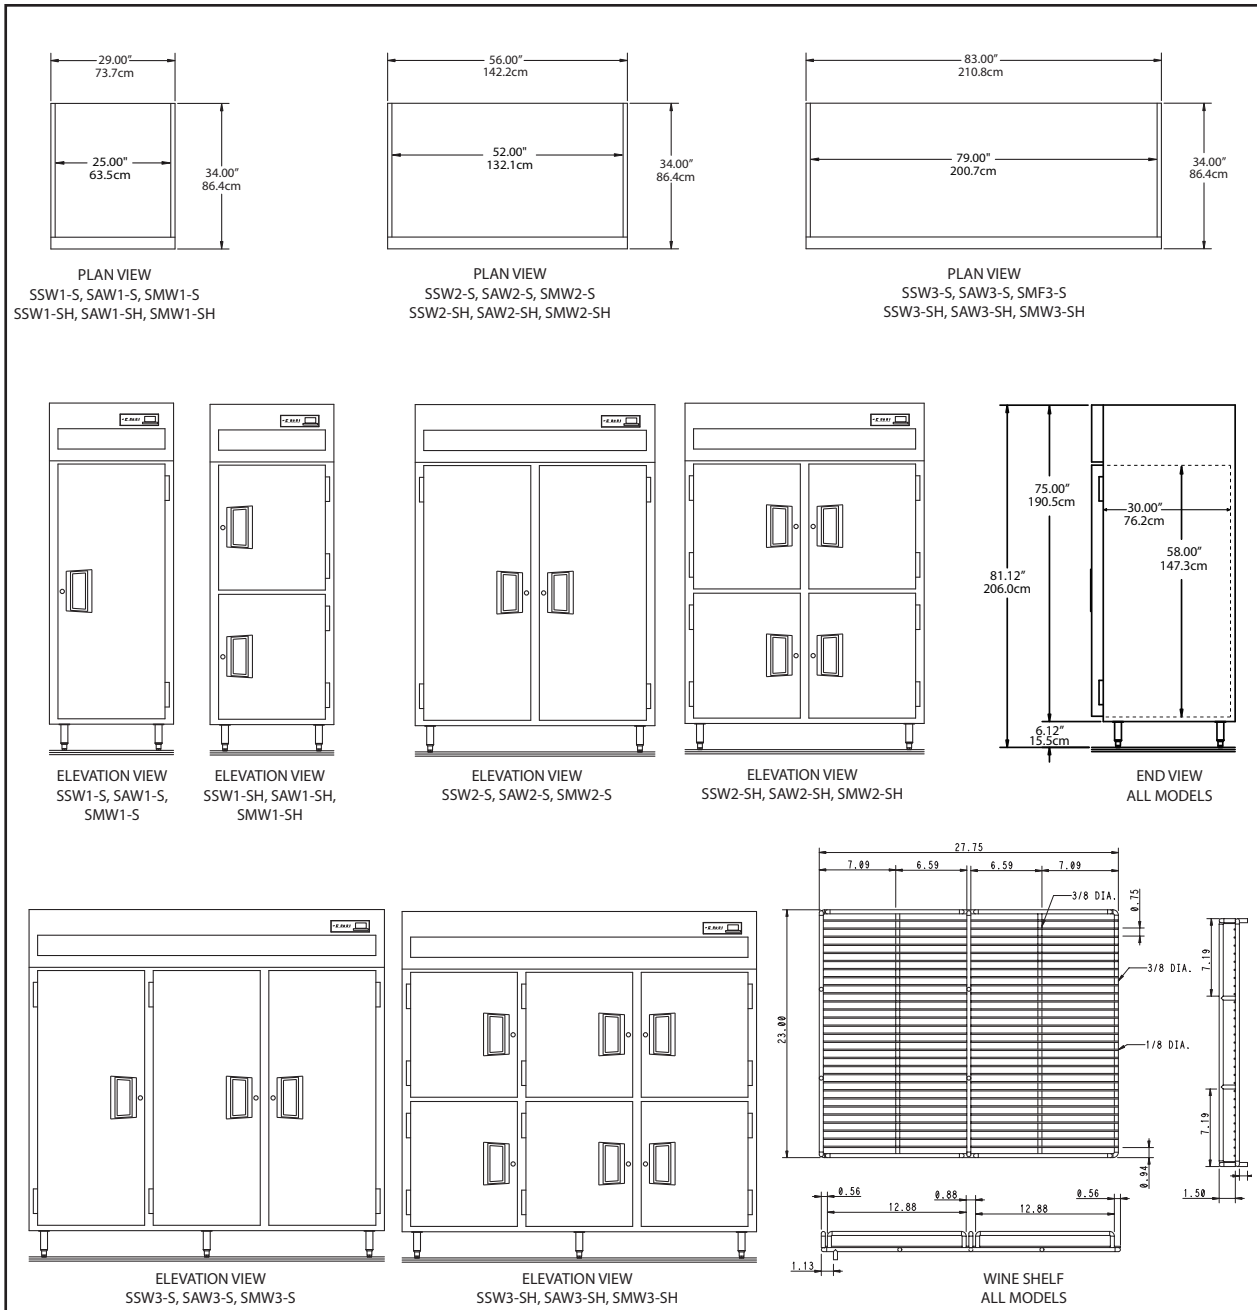

### Specifications

MODEL NUMBER	VOLTAGE	AMPS	STORAGE CU.FT.	SHELVES SQ.FT.	NO. OF SHELVES	UNIT H.P.	BTU/HR SYSTEM CAP	SHIP WEIGHT	NEMA PLUG	ENERGY (KWH)
SSW1-S, SSW1-SH, SAW1-S, SAW1-SH, SMW1-S, SMW1-SH	115	6.8	24.96	12.81	3	1/4	2092	418lbs (190kg)	5-15P	N/A
SSW2-S, SSW2-SH, SAW2-S, SAW2-SH, SMW2-S, SMW2-SH	115	9.0	51.92	27.54	6	1/3	3226	650lbs (295kg)	5-15P	N/A
SSW3-S, SSW3-SH, SAW3-S, SAW3-SH, SMW3-S, SMW3-SH	115	16.0	78.89	42.47	9	1/2	5465	830lbs (376kg)	5-20P	N/A

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.  
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981  
Fax: 800-669-0619  
www.delfield.com

Printed in the U.S.A.  
5837\_SSW  
04/15

