



Specification Line®

Self-Contained Glass Door Wine Cabinet Reach-In

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Specification Line®: Glass Door Wine Cabinet Reach-In

Models

One section	Two section	Three section	
SSW1-G	SSW2-G	SSW3-G	Stainless exterior and interior glass full door
SSW1-GH	SSW2-GH	SSW3-GH	Stainless exterior and interior glass half door
SAW1-G	SAW2-G	SAW3-G	Stainless exterior and aluminum interior glass full door
SAW1-GH	SAW2-GH	SAW3-GH	Stainless exterior and aluminum interior glass half door
SMW1-G	SMW2-G	SMW3-G	Stainless front aluminum exterior and interior glass full door
SMW1-GH	SMW2-GH	SMW3-GH	Stainless front aluminum exterior and interior glass half door



SSW2-G

Standard Features

- Stainless steel interior and exterior (SS)
- Stainless steel exterior, aluminum interior (SA)
- Aluminum interior and exterior, stainless front (SM)
- Built in door locks with heavy duty strikes
- Pressure relief valve is standard to prevent door vapor lock
- Exterior digital thermometer with high/low temperature alarm
- Easy to use electronic control
- Easy access "flip up" shroud
- Three chrome plated wine shelves per section
- 10' attached cord and plug
- 6" adjustable stainless steel legs
- Stainless steel breaker strips
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Energy savings door heater switch
- Two year parts & labor warranty
- Five year compressor warranty

Options & Accessories

- Additional shelves
- Tray slides
- Stainless steel back
- Laminate on shroud, sides and back
- Bottom mount electrical
- Stainless steel banking strip
- Heat shield end
- Stainless steel kick plate
- Laminate kick plate
- 4" stainless steel utility base
- 220-60-1 electrical
- 230-50-1 electrical

Specifications

Exterior: Cabinet exterior sides, front and shroud shall be corrosion resistant stainless steel (SS & SA series). Exterior sides shall be aluminum (SM series). All units shall have the upper shroud hinged with a gas assist stay open feature to provide easy access to the refrigeration system.

Interior: Cabinet interior shall be corrosion resistant stainless steel (SS models) or heavy gauge aluminum (SA models). Bottom and top surfaces are die stamped to provide radius corners and recessed floor. Three chrome plated wine shelves are provided per section. Shelves rest on clips which are adjustable in 1" increments on stainless steel pilasters affixed to the cabinet interior. Each section can hold up to 8 wine shelves. Each wine shelf holds 10 to 12 bottles. Pilasters are removable without tools for cleaning. A fluorescent light is mounted to the interior ceiling of each compartment, the switch is part of the light assembly. Door openings are protected with heavy gauge stainless steel breaker strips. An air duct is mounted to the ceiling assuring low velocity, even air movement throughout the cabinet interior.

Doors: Double paned tempered thermopane glass. Constructed with a combination of extruded aluminum and PVC. Each door has two edgemount, self-closing, cam lift style hinges. Doors can be removed from the cabinet without the use of tools. Door handle is continuous along vertical dimension of the door. Door gaskets are magnetic and


mount to the door, snapping in place and removable with out tools. Keyed door lock is mounted to the door. Lock engages into a heavy duty strike mounted to the cabinet face.

Refrigeration system: All components are mounted to the exterior cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R404A refrigerant is used. System has the capability of maintaining between 50°F and 60°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using Delfield's ACT-Advanced Control Technology electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption.


Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Electrical: Standard electrical connections shall be 115V, 60Hz, single phase. A 10' cord and plug is supplied attached to a junction box mounted on the exterior top of the cabinet.







PLAN VIEW
SSW1-G, SAW1-G, SMW1-G
SSW1-GH, SAW1-GH, SMW1-GH




PLAN VIEW
SSW2-G, SAW2-G, SMW2-G
SSW2-GH, SAW2-GH, SMW2-GH

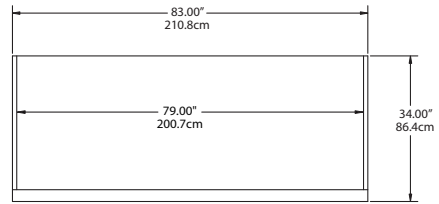


PLAN VIEW
SSW3-G, SAW3-G, SMW3-G
SSW3-GH, SAW3-GH, SMW3-GH




ELEVATION VIEW
SSW1-G, SAW1-G,
SMW1-G




ELEVATION VIEW
SSW1-GH, SAW1-GH,
SMW1-GH

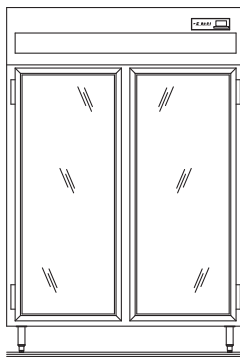


ELEVATION VIEW
SSW2-G, SAW2-G, SMW2-G

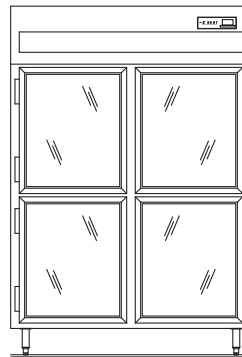


ELEVATION VIEW
SSW2-GH, SAW2-GH, SMW2-GH

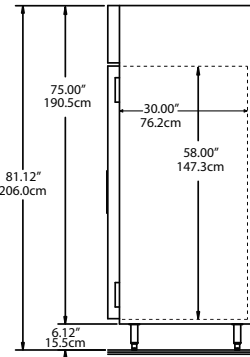


END VIEW
ALL MODELS

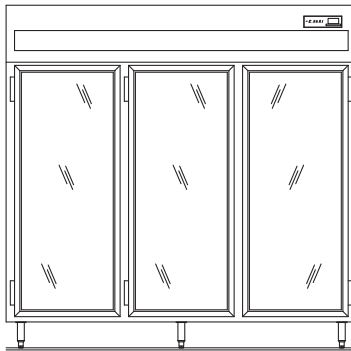

ELEVATION VIEW
SSW3-G, SAW3-G, SMW3-G

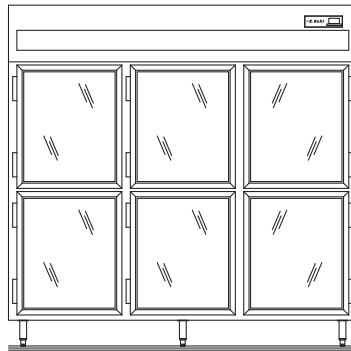

ELEVATION VIEW
SSW3-GH, SAW3-GH, SMW3-GH

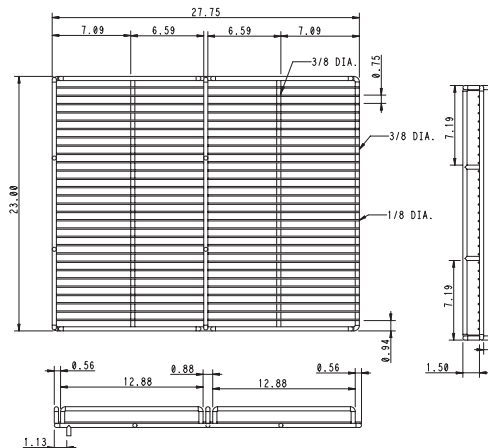

WINE SHELF
ALL MODELS

Specifications

MODEL NUMBER	VOLTAGE	AMPS	STORAGE CU.FT.	SHELVES SQ.FT.	NO. OF SHELVES	UNIT H.P.	BTU/HR SYSTEM CAP	SHIP WEIGHT	NEMA PLUG	ENERGY (KWH)
SSW1-G, SSW1-GH, SAW1-G, SAW1-GH, SMW1-G, SMW1-GH	115	6.8	24.96	12.81	3	1/4	2092	418lbs (190kg)	5-15P	N/A
SSW2-G, SSW2-GH, SAW2-G, SAW2-GH, SMW2-G, SMW2-GH	115	9.0	51.92	27.54	6	1/3	3226	650lbs (295kg)	5-15P	N/A
SSW3-G, SSW3-GH, SAW3-G, SAW3-GH, SMW3-G, SMW3-GH	115	16.0	78.89	42.47	9	1/2	5465	830lbs (376kg)	5-20P	N/A

Delfield reserves the right to make changes to the design or specifications without prior notice.