



Specification Line[®]

Self-Contained Fish Drawer Reach-In

Project _____

Item _____

Quantity _____

CSI Section 11400


Approved _____

Date _____

Specification Line[®] Fish Drawer Reach-In

Models

<u>One section</u>	<u>Two section</u>	
SSRFF1-S	SSRFF2-S	Stainless exterior and interior

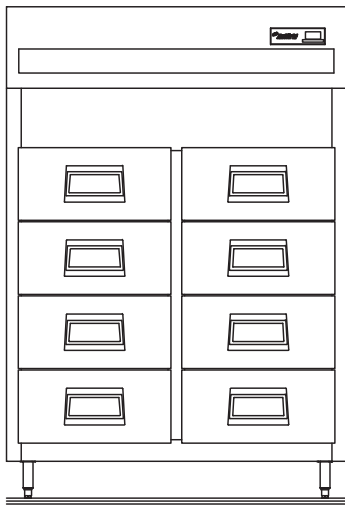

SSRFF2-S

Standard Features

- Stainless steel interior and exterior
- Exterior digital thermometer with high/low temperature alarm
- Easy to use electronic control
- Easy access "flip up" shroud
- 10' attached cord and plug
- 6" adjustable stainless steel legs
- Stainless steel breaker strips
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Energy savings door heater switch
- Four fish drawers with pans per section
- Three year parts and labor warranty and an additional two year compressor parts warranty

Options & Accessories

- Stainless steel back
- Bottom mount electrical
- Stainless steel banking strip
- Heat shield end
- Stainless steel kick plate
- Laminate kick plate
- High humidity evaporator coil
- 4" stainless steel utility base
- 230-50-1 electrical*
- 220-60-1 electrical*

* Inclusion of these options will alter the electrical specifications of unit

Specifications

Operation: Unit has four drawers per section, each equipped with special perforated pans to hold fish on ice. Drainage system channels ice melt to cabinet floor where a bell type drain with 3/4" pipe connection allows it to exit cabinet. Connection to floor drain required by operator. Refrigeration system operates as a normal reach-in would and serves to retard ice melt.

Exterior: Cabinet exterior sides, front and shroud shall be corrosion resistant stainless steel. Upper shroud shall be hinged, with stay-open feature to provide easy access to refrigeration system.

Interior: Cabinet interior shall be corrosion resistant stainless steel. Bottom and top surfaces are die stamped to provide radius corners and recessed floor.


Drawers: Exterior shall be corrosion resistant stainless steel. Interior liner shall be corrosion resistant stainless steel. Drawer slides and frame are corrosion resistant stainless steel. Self lubricating Delrin rollers eliminate metal to metal contact. Roller track snaps out for easy cleaning. Perforated pan with drainage is supplied and is removable for cleaning.

Refrigeration system: All components are mounted to the exterior cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R404A refrigerant is used. System has the capability of maintaining between 33°F and 44°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using Delfield's ACT-Advanced Control Technology electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption.


Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Electrical: Standard electrical connections shall be 115V, 60Hz, single phase. A 10' cord and plug is supplied attached to a junction box mounted on the exterior top of the cabinet.




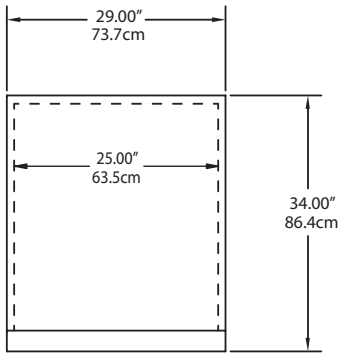


Plan View
SSRFF1-S

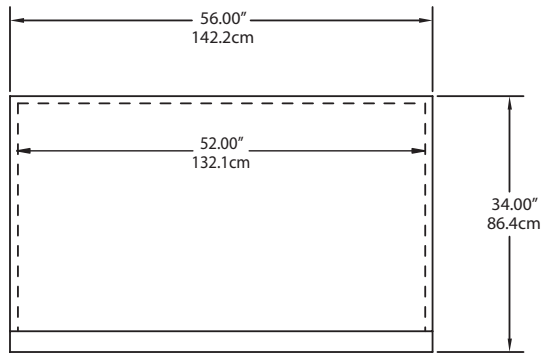


Plan View
SSRFF2-S

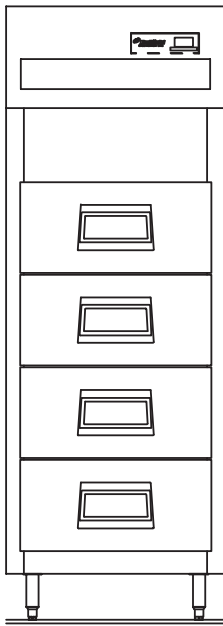

Elevation View
SSRFF1-S

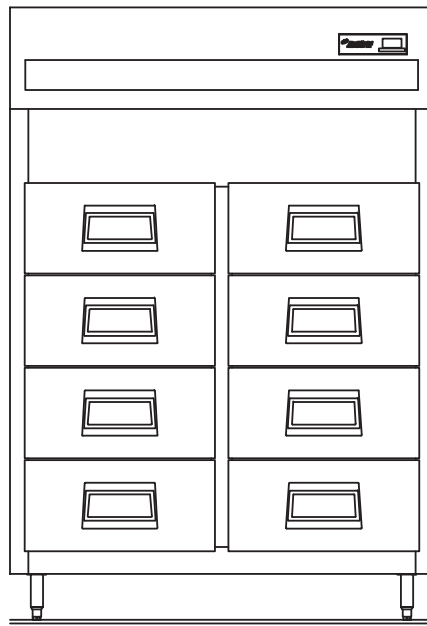

Elevation View
SSRFF2-S

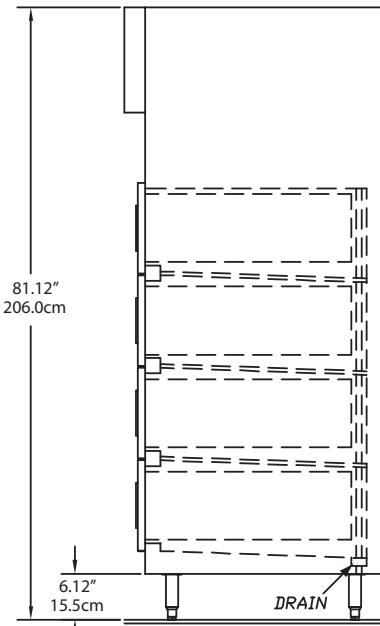

End Section View
All Models

Connection to floor drain required by operator.

Specifications

Model	V/Hz/Ph	Amps	Volume Cu.Ft.	Shelves Sq.Ft.	No. Of Shelves	Unit H.P.	BTU/Hr System Cap	Ship Weight	Nema Plug	Energy KWH/Day
SSRFF1-S	115/60/1	6.0	24.96	N/A	N/A	1/4	2092	418lbs (190kg)	5-15P	N/A
SSRFF2-S	115/60/1	9.5	51.92	N/A	N/A	1/3	3226	650lbs (295kg)	5-15P	N/A

Delfield reserves the right to make changes to the design or specifications without prior notice.