Shelleymatic by Delfield TT/TT2 Mobile Open Frame Tray And Rack D	Project Item Quantity CSI Section 11400 Approved Date	TT/TT2
Models • TT-1014 One stack, 11"x15" trays • TT-1216 One stack, 12"x16" trays • TT-1221 One stack, 12"x21" trays • TT-1418 One stack, 14"x18" trays • TT-1422 One stack, 14"x22" trays • TT-1622 One stack, 16"x22" trays • TT-1826 One stack, 20"x21" trays	 TT2-1014 Two stack, 11"x15" trays TT2-1216 Two stack, 12"x16" trays TT2-1221 Two stack, 12"x21" trays TT2-1418 Two stack, 14"x18" trays TT2-1422 Two stack, 14"x22" trays TT2-1622 Two stack, 16"x22" trays TT2-1826 Two stack, 18"x26" trays TT2-2020 Two stack, 20"x21" trays 	
	 Standard Features Tubing and base to be 16-gauge stainless steel Tubing and base to be integrally welded Base to be reinforced with 14-gauge stainless steel angles Non-marring gray corner bumpers (4) 4.00" diameter polyolefin swivel casters (all locking) Dispenser platform carrier shall be 18- gauge stainless steel Self-leveling mechanisms shall be adjustable by adding and removing stainless steel extension springs located inside the elevator housing Each dispenser section holds approximately 50-60 trays (varies per tray style) One year parts and 90 day labor standard warranty. Additional Options & Accessories Heavy-duty casters Heavy-duty casters Heavy-duty casters Slange-mount feet in lieu of casters Napkin dispensers Six- or eight-hole silverware bins with plastic or stainless steel cylinders Wrap-around bumpers (adds 1.75" [4.4cm] to overall length and depth) Dust cover 	Mobile Open Frame Tray And Rack Dispensers

Specifications

Framework shall be integrally welded 1.00" (2.5cm) O.D. 16-gauge stainless steel tubing welded to a 16-gauge stainless steel base. Frame shall have stainless steel horizontal support rods affixed to the tubing. Base shall be reinforced with full-length 14-gauge stainless steel angles.

Casters: Unit shall have four 4.00" (10.2cm) diameter polyolefin swivel casters (all locking) (5.00" [12.7cm] ride height) and non-marking gray bumpers at each corner.


Dispenser platform carries shall be 18-gauge stainless steel and shall be removable for cleaning. Each dispenser shall have 2 self-leveling mechanisms.

Self-leveling mechanisms shall be field adjustable by adding or removing stainless steel extension springs located inside the elevator housing.

warranties available





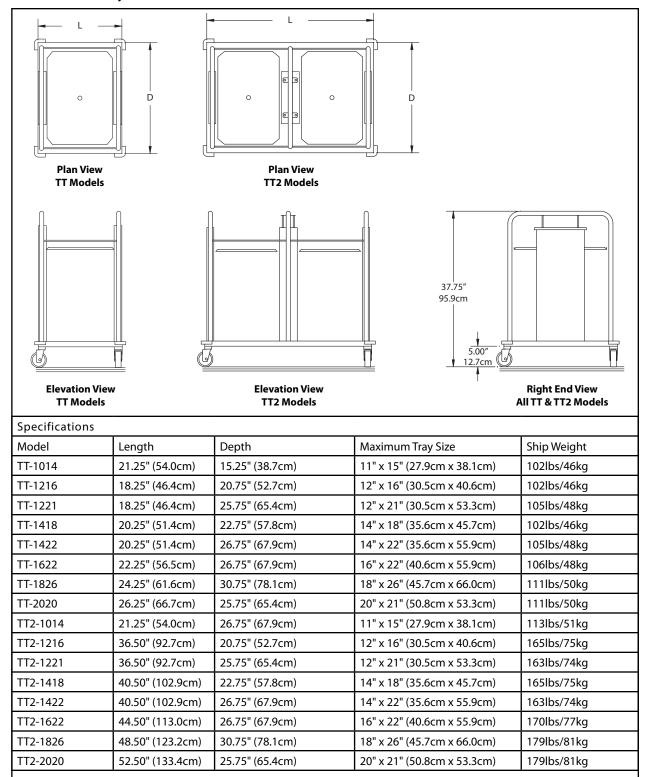

NOTES:

• Standard corner bumpers add 1.75" (4.4cm) to overall length and width.

• TT2 models dispense two separate stacks of trays.

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.delfield.com Printed in the U.S.A. DSTT_TT2 10/08

