


MOBILE PLATE DISPENSERS - ENCLOSED



Item Numbers

- DXIDP Plate Dispensers
- DXIDPH Plate Heaters

Application

These self-leveling mobile style plate dispensers are offered two, three or four silo, enclosed heated or unheated. These self-leveling mobile style plate dispensers can be found on tray lines, front or back-of-the-house, or any place your needs require.

Construction

Mobile cabinets are constructed of all welded stainless steel construction with #3 polished finish. Cabinet has 18-gauge top and 20 gauge side panels. Cabinet is mounted on four 5" extra-load swivel casters (two with brakes). Cabinet bottom has center clean out hole and includes perimeter bumper..

Heating System

The heating system is thermostatically controlled, in a tamper protective location. Thermostat is field adjustable with a temperature range between 100 to 189 degrees. On/off switch and power indicator light are mounted on top flange of dispenser. Unit is 120 volt, 60 Hz and features a 8' long cord set and 5-15P NEMA plug.

Dispenser

Self-leveling dispensers are constructed of stainless steel and travel vertically in dispenser tube with nylon guides for smooth operation. Dispenser features flange mounted perimeter extension springs, which are detachable to provide adjustment without tools.

Options

- Silo covers
- Wrap around bumpers


Warranty

One year parts and labor.

DINEX®

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

MOBILE PLATE DISPENSERS - ENCLOSED

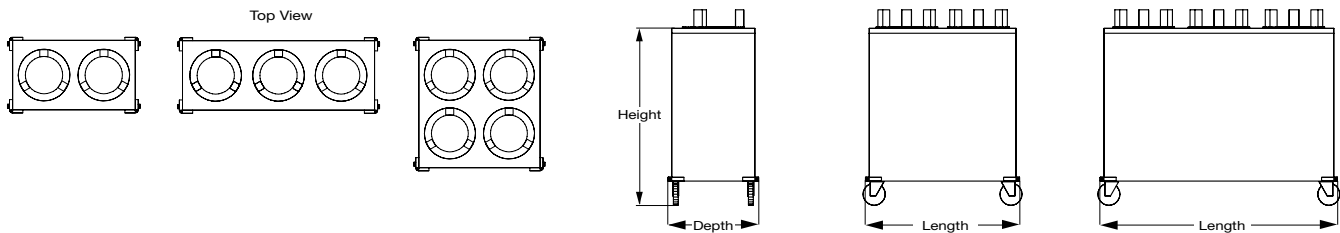

Items and Dimensions - Two Silo

| ITEM NO. UNHEATED | MODEL NO. UNHEATED | SHIP WT. | ITEM NO. HEATED | MODEL NO. HEATED | SHIP WT. | 120v-1PH | | L | D | H | MAX. PLATE SIZE | SHIP CUBE |
|----------------------|-----------------------|---------------------|--------------------|---------------------|---------------------|----------|------|-----------------|------------------|------------------|-----------------------|--------------|
| | | | | | | WATTS | AMPS | | | | | |
| DXIDP2E0912 | IDP2E/0912 | 161 lb. (74.0kg) | DXIDPH2E0912 | IDPH2E/0912 | 186 lb. (84.4kg) | 900 | 7.5 | 32" (81cm) | 18.50" (47cm) | 36.75" (93cm) | 9.125" | 13.5 |
| DXIDP2E1012 | IDP2E/1012 | 163 lb. (44.4kg) | DXIDPH2E1012 | IDPH2E/1012 | 190 lb. (86.3kg) | 900 | 7.5 | 32" (81cm) | 18.50" (47cm) | 36.75" (93cm) | 10.125" | 13.5 |
| DXIDP2E1200 | IDP2E/1200 | 175 lb. (79.5kg) | DXIDPH2E1200 | IDPH2E/1200 | 203 lb. (92.2kg) | 900 | 7.5 | 36.5" (93cm) | 20.75" (53cm) | 36.75" (93cm) | 12.25" | 13.5 |

Items and Dimensions - Three Silo

| ITEM NO. UNHEATED | MODEL NO. UNHEATED | SHIP WT. | ITEM NO. HEATED | MODEL NO. HEATED | SHIP WT. | 120v-1PH | | L | D | H | MAX. PLATE SIZE | SHIP CUBE |
|----------------------|-----------------------|---------------------|--------------------|---------------------|----------------------|----------|------|-------------------|------------------|------------------|-----------------------|--------------|
| | | | | | | WATTS | AMPS | | | | | |
| DXIDP3E0912 | IDP3E/0912 | 188 lb. (85.4kg) | DXIDPH3E0912 | IDPH3E/0912 | 223 lb. (101.2kg) | 1350 | 11.3 | 46.5" (118cm) | 18.50" (47cm) | 36.75" (93cm) | 9.125" | 19.7 |
| DXIDP3E1012 | IDP3E/1012 | 190 lb. (86.3kg) | DXIDPH3E1012 | IDPH3E/1012 | 225 lb. (102.2kg) | 1350 | 11.3 | 46.5" (118cm) | 18.50" (47cm) | 36.75" (93cm) | 10.125" | 19.7 |
| DXIDP3E1200 | IDP3E/1200 | 194 lb. (87.0kg) | DXIDPH3E1200 | IDPH3E/1200 | 227 lb. (103.0kg) | 1350 | 11.3 | 53.25" (135cm) | 20.75" (53cm) | 36.75" (93cm) | 12.00" | 22.7 |

Items and Dimensions - Four Silo

| ITEM NO. UNHEATED | MODEL NO. UNHEATED | SHIP WT. | ITEM NO. HEATED | MODEL NO. HEATED | SHIP WT. | 120v-1PH | | L | D | H | MAX. PLATE SIZE | SHIP CUBE |
|----------------------|-----------------------|-------------|--------------------|---------------------|----------------------|----------|------|---------------|-----------------|------------------|-----------------------|--------------|
| | | | | | | WATTS | AMPS | | | | | |
| - | - | - | DXIDPH4E0912 | IDPH4E/0912 | 247 lb. (112.1kg) | 1800 | 15 | 32" (81cm) | 32" (81cm) | 36.75" (93cm) | 9.125" | 24.4 |
| - | - | - | DXIDPH4E1012 | IDPH4E/1012 | 250 lb. (113.5kg) | 1800 | 15 | 32" (81cm) | 32" (81cm) | 36.75" (93cm) | 10.125" | 24.4 |
| - | - | - | DXIDPH4E1200 | IDPH4E/1200 | 253 lb. (114.2kg) | 1800 | 15 | 39" (99cm) | 36.5" (93cm) | 36.75" (93cm) | 12.00" | 29.7 |



Please confirm that you have the most current specification sheet by visiting www.dinex.com.
Dinex® reserves the right to change specifications and product design without notice.
Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.



Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com