



ER136 & ER136TLO



ER236 & ER236TLO

RETARDER-PROOFERS

*“Superior **quality** product
at an **affordable** price !”*

Retarder-Proofers

Standard Features

- Doyon's retarder proofer keeps your products refrigerated and switches automatically on proofing system
- Refrigeration mode: minimum temperature of 36° F (2 ° C)
- Proofing mode: maximum temperature of 110° F (43 ° C) with relative humidity up to 95 %
- Integrated automatic gravitational cooling system
- 7 day timer
- Up to 20 mode switch
- Electronic heat and relative humidity control
- Energy efficient
- Easy to read controls
- Heavy duty door opening-closing mechanism
- Aluminum flush floor entry
- 2" (51 mm) thick sealed polyurethane insulation
- Interior and exterior bumper
- Stainless steel construction
- Shipped fully assembled
- Automatic water entry
- No drain required
- Brightly lit
- ETL listed
- One year parts and labor limited warranty

Optional

- Full set of rust and scratch proof shelving
- Hinged right or left
- Doyon roll-in racks

Retarder-Proofers

Our Retarder-Proofers are the ideal equipment to keep your products in a refrigerated environment and switch automatically to proofing mode. This allows to start baking right away resulting in labour savings.

DIMENSIONS

ER136

37 1/2"W X 50 1/4"D X 89 3/4"H
(952 mm X 1275 mm X 2280 mm)

ER236

71"W X 44 1/4"D X 88"H
(1805 mm X 1125 mm X 2235 mm)

ER136TLO

37 1/2"W X 50 1/4"D X 96 1/4"H
(952 mm X 1275 mm X 2445 mm)

ER236TLO

71"W X 44 1/4"D X 94 1/2"H
(1805 mm X 1125 mm X 2400 mm)

DOOR OPENING

ER136 & ER236

27"W X 68 1/2"H
(686 mm X 1740 mm)

ER136TLO & ER236TLO

27"W X 73"H

(686 mm X 1855 mm)

ELECTRICAL SYSTEM

ER136 & ER136TLO

120/208V - 1 PH -27 A - 5.7 kW - 3 wires - 60 Hz

120/240V - 1 PH -24 A - 5.7 kW - 3 wires - 60 Hz

ER236 & ER236TLO

120/208V - 1 PH -35 A - 7.2 kW - 3 wires - 60 Hz

120/240V - 1 PH -30 A - 7.2 kW - 3 wires - 60 Hz

Other voltages available

Water inlet : 1/4" NPT

FINISH

Stainless steel inside and outside

SHIPPING WEIGHT

ER136 : 900 lb (409 kg) approximately

ER236 : 1000 lb (454 kg) approximately


ER136TLO : 900 lb (409 kg) approximately

ER236TLO : 1000 lb (454 kg) approximately


Electrical and water inlets are located on the top of the retarder-proofer, approximately in the center.

Specifications and design subject to change without notice.


ER136 & ER136TLO

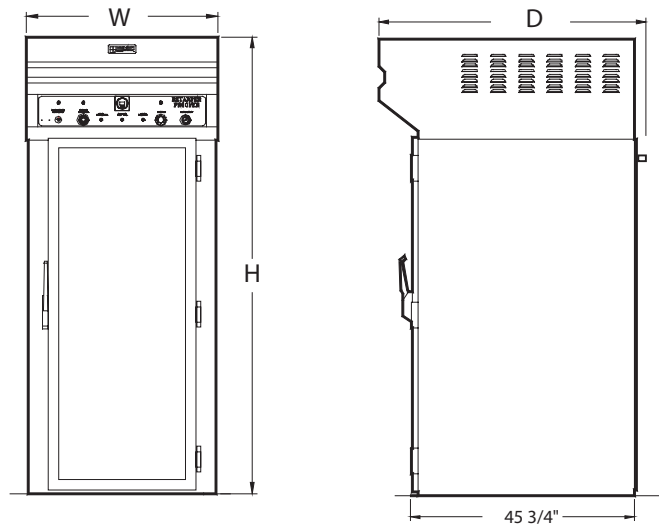

ER236 & ER236TLO

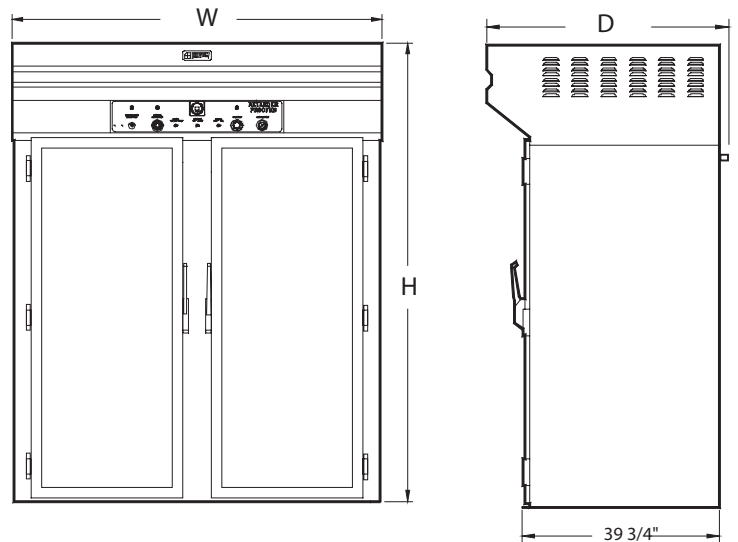

Your local distributor:

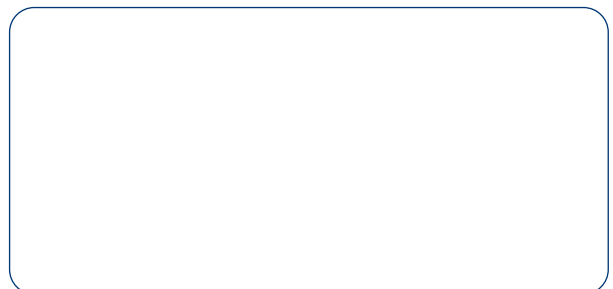

1255, rue Principale
Linière, Beauce, Québec, Canada G0M 1J0

Telephone : (418) 685-3431 Fax: (418) 685-3948
Canada : (800) 463-1636 U.S.: (800) 463-4273
E-Mail : doyon@doyon.qc.ca Internet: http://www.doyon.qc.ca