




"Your Solutions Partner"

Specifications

F.O.B. St. Louis, Missouri 63102



1302

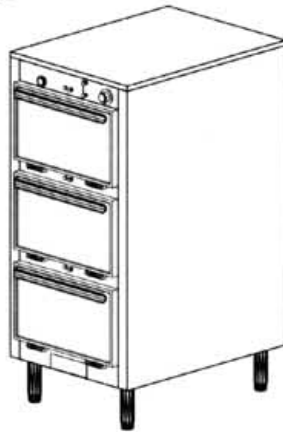

1303

OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes/2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pair 3" angle slides
- Door locks
- 440-480V Circuit
- Legs - for 1302/1302P models only
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph, 208V/3Ph, 240V/1Ph, 240V/3Ph

AGENCY LISTINGS:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PROJECT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2"D Compartments

- 1302** Reach-In - 1 thermostat for all 2 compartments, w/o legs
- 1302P** Pass-Thru - 1 thermostat for all 2 compartments, w/o legs
- 1303** Reach-In - 1 thermostat for all 3 compartments, with legs
- 1303P** Pass-Thru - 1 thermostat for all 3 compartments, with legs

BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in stop externally adjustable, completely concealed

COMPARTMENTS:

- Heavy gauge stainless steel with rounded corners
- Stainless steel studs, for angle slides at 3 levels
- 2 removable, adjustable, stainless steel, 3" angle slide pairs
- Removable liner for inspection and maintenance

ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100°-300°F and dial thermometer
- Pilot lights
- Recessed connection box wit
- Removable access panels

DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

INSULATION:

- Body fully insulated with 1-1/2" fiberglass

HEATING ELEMENTS:

- Sheath type strip heaters, 120 volt, 1 Phase
- Removable compartment for ease of access to heating elements

LEGS (for Models 1303/1303P):

- Stainless steel die-stamped adjustable - 6" high

SHORT FORM SPECIFICATIONS:


Duke Thermotainer Food Holding Cabinets. Models 1302/1302P constructed with two (2) compartments. Models 1303/1303P to have three (3) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat controls all compartments. Built-in installation - allow 1/4" tolerance greater than body width. 100°-300°F heat range with dial thermometer, and 1303/1303P models with 6" high stainless steel legs.





THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES
9"H x 14"W x 23-1/2"D COMPARTMENTS

- **1302** Reach-In - 1 thermostat for all 2 compartments, w/o legs
- **1302P** Pass-Thru - 1 thermostat for all 2 compartments, w/o legs
- **1303** Reach-In - 1 thermostat for all 3 compartments, w/legs
- **1303P** Pass-Thru - 1 thermostat for all 3 compartments, w/legs


Catalog No. THERMO-1302/1303 A.I.A. File No. 35-C-13

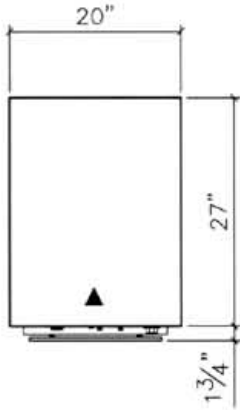

1302

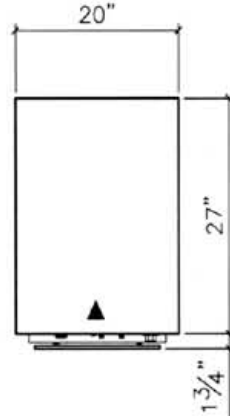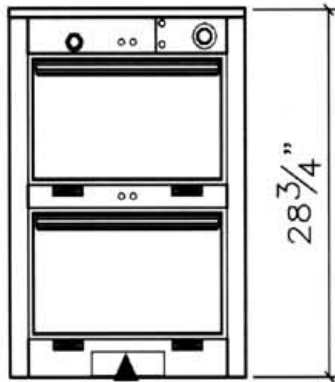

1303

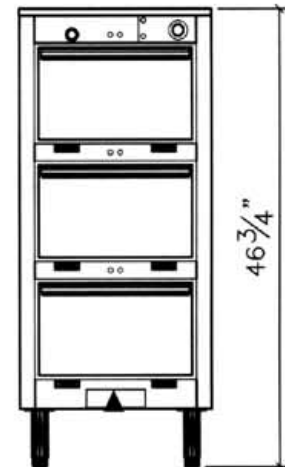

LEGEND	
▲	ELECTRICAL CONNECTION

DIMENSIONS:

Freight Class: 100

Model	Width		Depth		Height		Comp. Depth		Cube ft. crated	Weight	
	in.	cm	in.	cm	in.	cm	in.	cm		lbs.	kg
1302	20	50.8	28-3/4	73.0	28-3/4	73.0	23-1/2	59.7	18.1	190	86.4
1302P	20	50.8	30-1/2	77.5	28-3/4	73.0	25-1/2	64.8	19.1	190	86.4
1303	20	50.8	28-3/4	73.0	46-3/4	118.8	23-1/2	59.7	27.0	350	159.1
1303P	20	50.8	30-1/2	77.5	46-3/4	118.8	25-1/2	64.8	28.4	350	159.1

ELECTRICAL SPECIFICATIONS: (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load
1302	1000 watts
1302P	1000 watts
1303	1500 watts
1303P	1500 watts

	1302/1302P	1303/1303P
Capacity w/standard slides	(6) 12" x 20" x 2" pans or (4) 12" x 20" x 4" pans or (2) 12" x 20" x 8" pans	(9) 12" x 20" x 2" pans or (6) 12" x 20" x 4" pans or (3) 12" x 20" x 8" pans

- 1302** Reach-In - hinged doors on front only
- 1302P** Pass-Thru - hinged doors on front & back for pass-thru service
- 1303** Reach-In - hinged doors on front only
- 1303P** Pass-Thru - hinged doors on front & back for pass-thru service



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 314.231.1130 In Missouri
 314.231.5074 Fax
www.dukemfg.com

"Your Solutions Partner"

Specifications subject to change

08/03

Printed in U.S.A.
 ©2003, Duke Manufacturing Co.