





"Your Solutions Partner"

Specifications

F.O.B. St. Louis, Missouri 63102

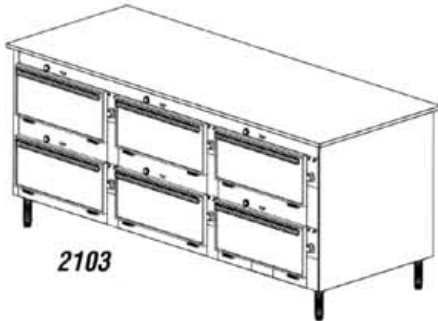

2103

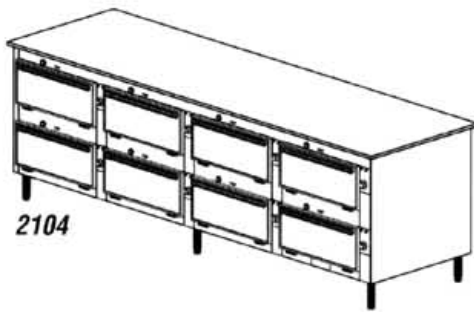

2104

OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes/2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pair 5" angle slides
- Door locks
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph; 208V/3Ph; 240V/1Ph; 240V/3Ph

AGENCY LISTINGS:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PROJECT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thermotainer Food Holding Cabinets - "B" Series 9"H x 22"W x 28-1/2"D Compartments

- 2103** Reach-In - 1 thermostat per compartment, w/legs
- 2103P** Pass-Thru - 1 thermostat per compartment, w/legs
- 2104** Reach-In - 1 thermostat per compartment, w/legs
- 2104P** Pass-Thru - 1 thermostat per compartment, w/legs

BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings
- Top 14 ga. S/S w/1" turned down edge and 1" overhang on all sides

DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in stop externally adjustable, completely concealed

COMPARTMENTS:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 5" angle slide pairs
- Removable liner for inspection and maintenance

ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100°-300°F and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panels

DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

INSULATION:

- Body fully insulated with 1-1/2" fiberglass

HEATING ELEMENTS:

- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements

LEGS:

- Stainless steel die-stamped adjustable - 6"

SHORT FORM SPECIFICATIONS:


Duke Thermotainers Food Holding Cabinets. Models 2103/2103P constructed with six (6) compartment. Models 2104/2104P to have eight (8) compartments. Compartments 9"H x 22"W x 28-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat per compartment. 14 ga stainless work top. 100°-300°F heat range with dial thermometer and 6" high stainless legs. Built-in installation - allow 1/4" tolerance greater than body width.




THERMOTAINER FOOD HOLDING CABINETS - "B" SERIES
9"H x 22"W x 28-1/2"D COMPARTMENTS

- 2103** Reach-In - 1 thermostat per compartment, w/legs
- 2103P** Pass-Thru - 1 thermostat per compartment, w/legs
- 2104** Reach-In - 1 thermostat per compartment, w/legs
- 2104P** Pass-Thru - 1 thermostat per compartment, w/legs



LEGEND	
▲	ELECTRICAL CONNECTION

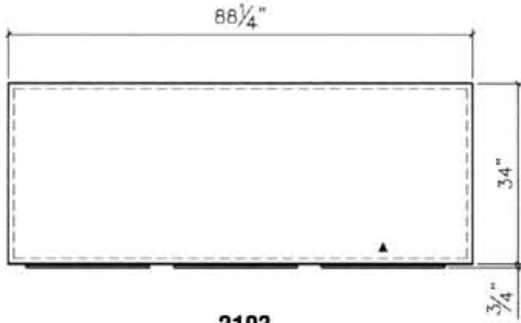

2103

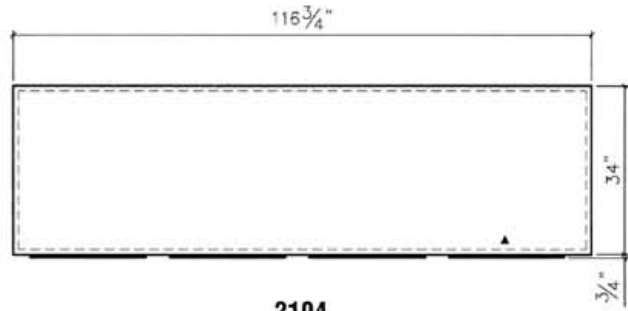

2104

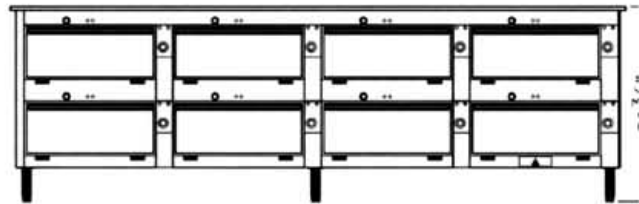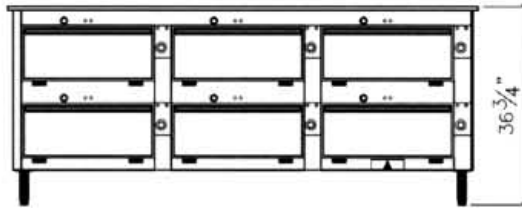

DIMENSIONS:

Freight Class: 100

Model	Width		Depth		Height		Comp. Depth		Cube ft. crated	Weight	
	in.	cm	in.	cm	in.	cm	in.	cm		lbs.	kg
2103	88-1/4	224.2	34-3/4	88.3	36-3/4	93.4	28-1/2	72.4	94.6	900	409.1
2103P	88-1/4	224.2	36-1/2	92.7	36-3/4	93.4	30-1/2	77.5	98.9	900	409.1
2104	116-3/4	296.6	34-3/4	88.3	36-3/4	93.4	28-1/2	72.4	123.2	1100	500.0
2104P	116-3/4	296.6	36-1/2	92.7	36-3/4	93.4	30-1/2	77.5	128.8	1100	500.0

ELECTRICAL SPECIFICATIONS: (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load
2103	4500 watts
2103P	4500 watts
2104	6000 watts
2104P	6000 watts

	2103/2103P	2104/2104P
Capacity w/standard slides	(36) 12" x 20" x 2" pans or (24) 12" x 20" x 4" pans or (12) 12" x 20" x 8" pans or (18) 18" x 26" bake sheets	(48) 12" x 20" x 2" pans or (32) 12" x 20" x 4" pans or (16) 12" x 20" x 8" pans or (24) 18" x 26" bake sheets

- 2103** Reach-In - hinged doors on front only
- 2103P** Pass-Thru - hinged doors on front & back for pass-thru service
- 2104** Reach-In - hinged doors on front only
- 2104P** Pass-Thru - hinged doors on front & back for pass-thru service



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

"Your Solutions Partner"

Specifications subject to change

08/03

Printed in U.S.A.
 ©2003, Duke Manufacturing Co.