


"Your Solutions Partner"

# Specifications

F.O.B. St. Louis, Missouri 63102

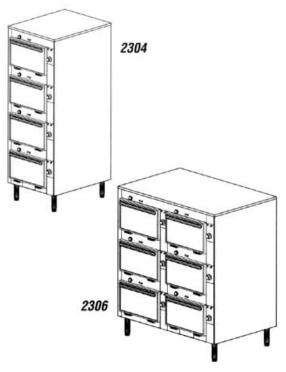

# OPTIONS:

- ☐ Enclosed base 6" high
- Cord and plug 8'
- Casters 5" polyurethane, 2 swivel w/brakes/2 rigid
- Push bar
- Bumpers stainless steel
- Door Panels laminated plastic
- Additional pairs 3" angle slides
- Door locks
- 440-480V Circuit
- Celsius thermometer in lieu of Farenheit
- 208V/1Ph, 208V/3Ph, 240V/1Ph, 240V/3Ph

# AGENCY LISTINGS:





DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314.231.1130 In Missouri 314.231.5074 Fax www.dukemfg.com

App	roval Stam	ıp(s):	

PROJECT INFO	RMATION:	
PROJECT:		

ITEM: QUANTITY:

# MODEL:

# Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2"D Compartments

□ 2304 Reach-In - 1 thermostat per compartment, w/legs
□ 2304P Pass-Thru - 1 thermostat per compartment, w/legs
□ 2306 Reach-In - 1 thermostat per compartment, w/legs
□ 2306P Pass-Thru - 1 thermostat per compartment, w/legs

#### BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

#### DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in stop externally adjustable, completely concealed

#### COMPARTMENTS:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs, for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 3" angle slide pairs
- Removable liner for inspection and maintenance

# **ELECTRICAL CONTROLS:**

- Recessed thermostat w/built-in On-Off switch
- Heat range 100°-300°F and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panels

#### DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

#### **NSULATION:**

Body fully insulated with 1-1/2" fiberglass

# **HEATING ELEMENTS:**

- Sheath type strip heaters
- Removable compartment for ease of access to heating elements

#### LEGS:

Stainless steel die-stamped adjustable - 6" high

# SHORT FORM SPECIFICATIONS:

**Duke Thermotainers Food Holding Cabinets.** Models 2304/2304P constructed with four (4) compartments. Models 2306/2306P to have six (6) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat per compartment. 100°-300°F heat range with dial thermometer, and 6" high stainless legs. Built-in installation - allow 1/4" tolerance greater than body width.





### THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES 9"H x 14"W x 23-1/2"D COMPARTMENTS

2304 1 thermostat per compartment, w/legs Reach-In -2304P Pass-Thru - 1 thermostat per compartment, w/legs 2306 1 thermostat per compartment, w/legs Reach-In -2306P Pass-Thru - 1 thermostat per compartment, w/legs

LEGEND

▲ - ELECTRICAL CONNECTION

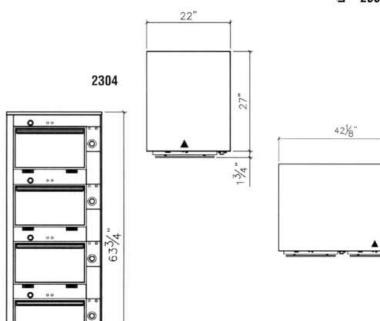

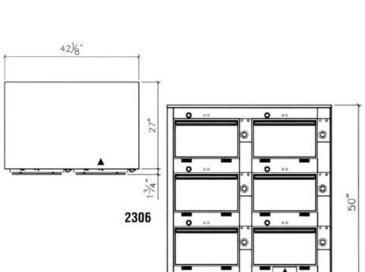

# DIMENSIONS:

Freight Class: 100 Width Weight Depth Height Comp. Depth Cube

Model	in.	cm	in.	cm	in.	cm	in.	cm	ft. crated	lbs.	kg
2304	22	55.9	28-3/4	73.0	63-3/4	161.9	23-1/2	59.7	38.1	500	227.3
2304P	22	55.9	30-1/2	77.5	63-3/4	161.9	25-1/2	64.8	40.1	500	227.3
2306	42-1/8	107.2	28-3/4	73.0	50	127.0	23-1/2	59.7	52.9	650	295.5
2306P	42-1/8	107.2	30-1/2	77.5	50	127.0	25-1/2	64.8	55.7	650	295.5

# **ELECTRICAL SPECIFICATIONS:** (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load		
2304	3000 watts		
2304P	3000 watts		
2306	4500 watts		
2306P	4500 watts		

	2304/2304P	2306/2306P
Capacity //standard slides	(12) 12" x 20" x 2" pans or (8) 12" x 20" x 4" pans or (4) 12" x 20" x 8" pans	(18) 12" x 20" x 2" pans or (12) 12" x 20" x 4" pans or (6) 12" x 20" x 8" pans

2304 hinged doors on front only Reach-In -

2304P Pass-Thru hinged doors on front & back for pass-thru service

2306 Reach-In hinged doors on front only

2306P Pass-Thru hinged doors on front & back for pass-thru service



**DUKE MANUFACTURING CO.** 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314.231.1130 In Missouri 314.231.5074 Fax www.dukemfg.com

08/03