



"Your Solutions Partner"

# Specifications

F.O.B. St. Louis, Missouri 63102



2308



2309

### OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes/2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pairs 3" angle slides
- Door locks
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph, 208V/3Ph, 240V/1Ph, 240V/3Ph

### AGENCY LISTINGS:



**DUKE MANUFACTURING CO.**  
2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free  
314.231.1130 In Missouri  
314.231.5074 Fax  
www.dukemfg.com

### Approval Stamp(s):

### PROJECT INFORMATION:

PROJECT: \_\_\_\_\_  
ITEM: \_\_\_\_\_  
QUANTITY: \_\_\_\_\_

### MODEL:

## Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2"D Compartments

- 2308** Reach-In - 1 thermostat per compartment, w/legs
- 2308P** Pass-Thru - 1 thermostat per compartment, w/legs
- 2309** Reach-In - 1 thermostat per compartment, w/legs
- 2309P** Pass-Thru - 1 thermostat per compartment, w/legs

### BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

### DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in stop externally adjustable, completely concealed

### COMPARTMENTS:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 3" angle slide pairs
- Removable liner for inspection and maintenance

### ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100°-300°F and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panels

### DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

### INSULATION:

- Body fully insulated with 1-1/2" fiberglass

### HEATING ELEMENTS:

- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements

### LEGS:

- Stainless steel die-stamped adjustable - 6" high



### SHORT FORM SPECIFICATIONS:

**Duke Thermotainers Food Holding Cabinets.** Models 2308/2308P constructed with eight (8) compartments. Models 2309/2309P to have nine (9) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat per compartment. 100°-300°F heat range with dial thermometer and 6" high stainless legs. Built-in installation - allow 1/4" tolerance greater than body width.



**THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES**  
**9"H x 14"W x 23-1/2"D COMPARTMENTS**

- 2308** Reach-In - 1 thermostat per compartment, w/legs
- 2308P** Pass-Thru - 1 thermostat per compartment, w/legs
- 2309** Reach-In - 1 thermostat per compartment, w/legs
- 2309P** Pass-Thru - 1 thermostat per compartment, w/legs

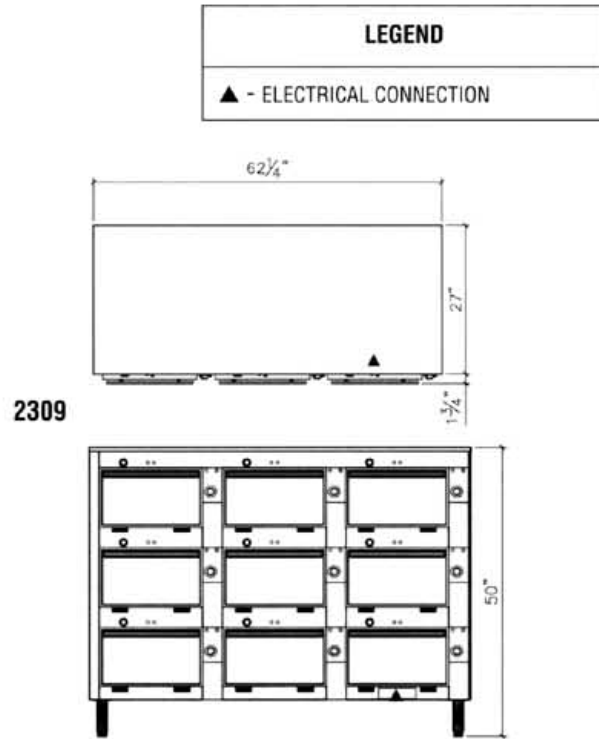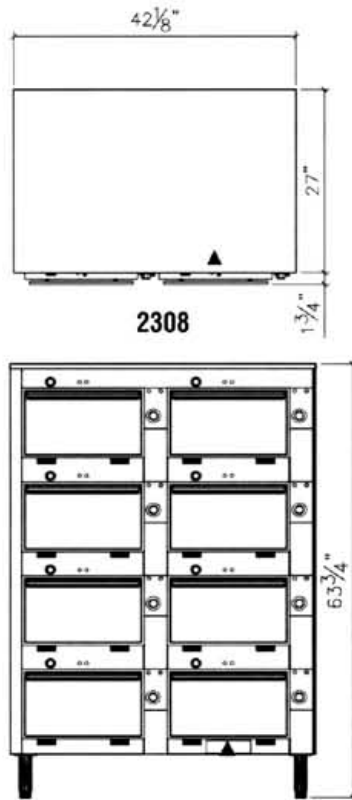

LEGEND	
▲	ELECTRICAL CONNECTION

**DIMENSIONS:**

Freight Class: 100

Model	Width		Depth		Height		Comp. Depth		Cube ft. crated	Weight	
	in.	cm	in.	cm	in.	cm	in.	cm		lbs.	kg
<b>2308</b>	42-1/8	107.0	28-3/4	73.0	63-3/4	161.9	23-1/2	59.7	65.5	850	386.4
<b>2308P</b>	42-1/8	107.0	30-1/2	77.5	63-3/4	161.9	25-1/2	64.8	69.0	850	386.4
<b>2309</b>	62-1/4	158.1	28-3/4	73.0	50	127.0	23-1/2	59.7	75.0	950	431.8
<b>2309P</b>	62-1/4	158.1	30-1/2	77.5	50	127.0	25-1/2	64.8	79.0	950	431.8

**ELECTRICAL SPECIFICATIONS:** (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load
<b>2308</b>	6000 watts*
<b>2308P</b>	6000 watts*
<b>2309</b>	6750 watts
<b>2309P</b>	6750 watts

	2308/2308P	2309/2309P
<b>Capacity w/standard slides</b>	(24) 12" x 20" x 2" pans or (16) 12" x 20" x 4" pans or (8) 12" x 20" x 8" pans	(27) 12" x 20" x 2" pans or (18) 12" x 20" x 4" pans or (9) 12" x 20" x 8" pans

- 2308** Reach-In - hinged doors on front only
- 2308P** Pass-Thru - hinged doors on front & back for pass-thru service
- 2309** Reach-In - hinged doors on front only
- 2309P** Pass-Thru - hinged doors on front & back for pass-thru service

\* - 208-240V only



**DUKE MANUFACTURING CO.**  
**2305 N. Broadway**  
**St. Louis, MO 63102**

**800.735.3853 Toll Free**  
**314.231.1130 In Missouri**  
**314.231.5074 Fax**  
**www.dukemfg.com**

**"Your Solutions Partner"**

Specifications subject to change

08/03

Printed in U.S.A.  
 ©2003, Duke Manufacturing Co.