


"Your Solutions Partner"

# **Specifications**

F.O.B. St. Louis, Missouri 63102

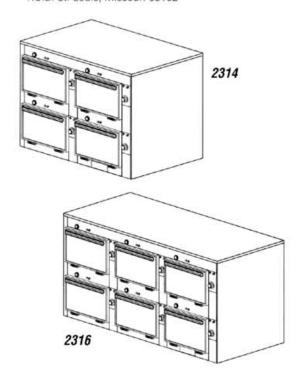

#### OPTIONS:

- □ Enclosed base 6" high
- Cord and plug 8'
- Casters 5" polyurethane, 2 swivel w/brakes/2 rigid
- Push bar
- Bumpers stainless steel
- Door Panels laminated plastic
- Additional pairs 3" angle slides
- Door locks
- □ Legs
- → 440-480V Circuit
- Celsius thermometer in lieu of Farenheit
- 208V/1Ph, 208V/3Ph, 240V/1Ph, 240V/3Ph

#### **AGENCY LISTINGS:**





DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314.231.1130 In Missouri 314.231.5074 Fax www.dukemfg.com

Approv	al Stamp(s	s):	

PROJECT INFOR	MATION:	
PROJECT:		
ITEM:		
QUANTITY:		

#### MODEL:

## Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2"D Compartments

	2314	Reach-In -	1 thermostat per compartment, w/o legs
	2314P	Pass-Thru -	1 thermostat per compartment, w/o legs
	2316	Reach-In -	1 thermostat per compartment, w/o legs
$\Box$	2316P	Pass-Thru -	1 thermostat per compartment, w/o lens

#### BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

#### DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in stop externally adjustable, completely concealed

#### COMPARTMENTS:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 3" angle slide pairs
- Removable liner for inspection and maintenance

#### **ELECTRICAL CONTROLS:**

- Recessed thermostat w/built-in On-Off switch
- Heat range 100°-300°F and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panels

#### DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

#### INSULATION:

Body fully insulated with 1-1/2" fiberglass

#### **HEATING ELEMENTS:**


- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements

#### SHORT FORM SPECIFICATIONS:

**Duke Thermotainers Food Holding Cabinets.** Models 2314/2314P constructed with four (4) compartments. Models 2316/2316P to have six (6) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat per compartment. 100°-300°F heat range with dial thermometer. Built-in installation - allow 1/4" tolerance greater than body width.


# Thermotainer


# 2314




### THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES 9"H x 14"W x 23-1/2"D COMPARTMENTS

□ 2314 Reach-In - 1 thermostat per compartment, w/o legs
□ 2316 Reach-In - 1 thermostat per compartment, w/o legs
□ 2316 Reach-In - 1 thermostat per compartment, w/o legs
□ 2316P Pass-Thru - 1 thermostat per compartment, w/o legs







DIMENSIONS: Freight Class: 100

Model	Width		Depth		Height		Comp. Depth		Cube	Weight	
	in.	cm	in.	cm	in.	cm	in.	cm	ft. crated	lbs.	kg
2314	42-1/8	107.0	28-3/4	73.0	30-1/4	76.8	23-1/2	59.7	34.9	500	227.3
2314P	42-1/8	107.0	30-1/2	77.5	30-1/4	76.8	25-1/2	64.8	36.8	500	227.3
2316	62-1/4	158.1	28-3/4	73.0	30-1/4	76.8	23-1/2	59.7	49.5	650	295.5
2316P	62-1/4	158.1	30-1/2	77.5	30-1/4	76.8	25-1/2	64.8	52.1	650	295.5

**ELECTRICAL SPECIFICATIONS:** (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load	
2314	3000 watts	
2314P	3000 watts	
2316	4500 watts	
2316P	4500 watts	

	2314/2314P	2316/2316P		
Capacity w/standard slides	(12) 12" x 20" x 2" pans or (8) 12" x 20" x 4" pans or (4) 12" x 20" x 8" pans	(18) 12" x 20" x 2" pans or (12) 12" x 20" x 4" pans or (6) 12" x 20" x 8" pans		

2314 Reach-In - hinged doors on front only

2314P Pass-Thru - hinged doors on front & back for pass-thru service

2316 Reach-In - hinged doors on front only

2316P Pass-Thru - hinged doors on front & back for pass-thru service



DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102

800.735.3853 Toll Free 314.231.1130 In Missouri 314.231.5074 Fax www.dukemfg.com

08/03