





"Your Solutions Partner"

Specifications

F.O.B. St. Louis, Missouri 63102

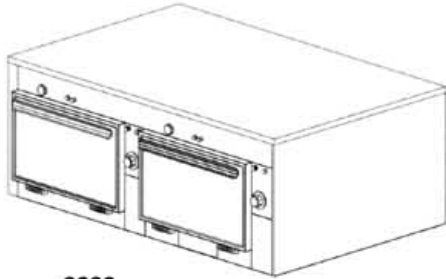

2602

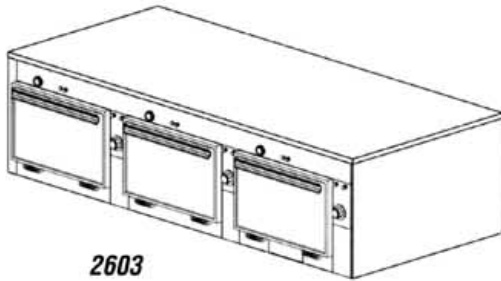

2603

OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes/2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pairs 3" angle slides
- Door locks
- Legs
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph, 208V/3Ph, 240V/1Ph, 240V/3Ph

AGENCY LISTINGS:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PROJECT INFORMATION:

PROJECT: _____
 ITEM: _____
 QUANTITY: _____

MODEL:

Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2"D Compartments

- 2602** Reach-In - 1 thermostat per compartment, w/o legs
- 2602P** Pass-Thru - 1 thermostat per compartment, w/o legs
- 2603** Reach-In - 1 thermostat per compartment, w/o legs
- 2603P** Pass-Thru - 1 thermostat per compartment, w/o legs

BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in stop externally adjustable, completely concealed

COMPARTMENTS:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 3" angle slide pairs
- Removable liner for inspection and maintenance

ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100°-300°F and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panels

DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

INSULATION:

- Body fully insulated with 1-1/2" fiberglass

HEATING ELEMENTS:

- Sheath type strip heaters
- Removable compartment for ease of access to heating elements




SHORT FORM SPECIFICATIONS:

Duke Thermotainers Food Holding Cabinets. Models 2602/2602P constructed with two (2) compartments. Models 2603/2603P to have three (3) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat per compartment. 100°-300°F heat range with dial thermometer. Built-in installation - allow 1/4" tolerance greater than body width.



THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES
9"H x 14"W x 23-1/2"D COMPARTMENTS

- 2602** Reach-In - 1 thermostat per compartment, w/o legs
- 2602P** Pass-Thru - 1 thermostat per compartment, w/o legs
- 2603** Reach-In - 1 thermostat per compartment, w/o legs
- 2603P** Pass-Thru - 1 thermostat per compartment, w/o legs

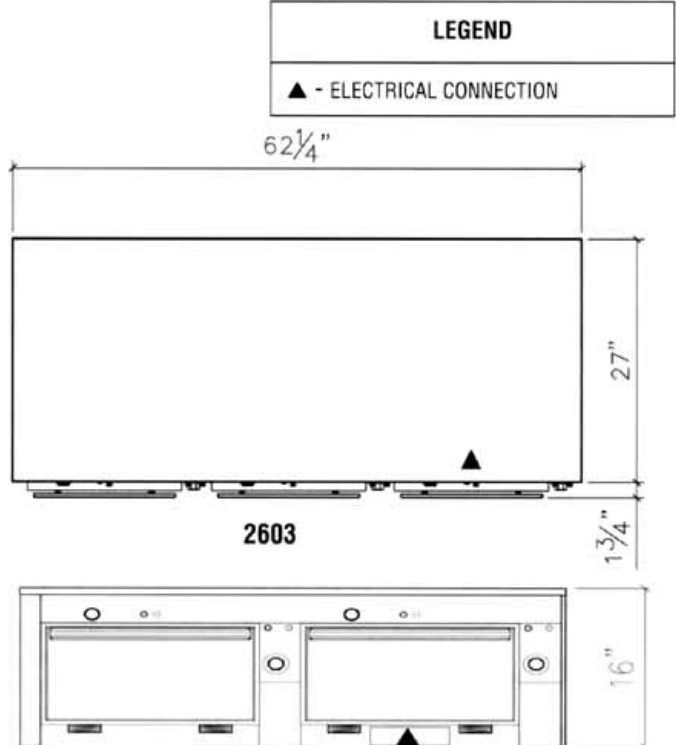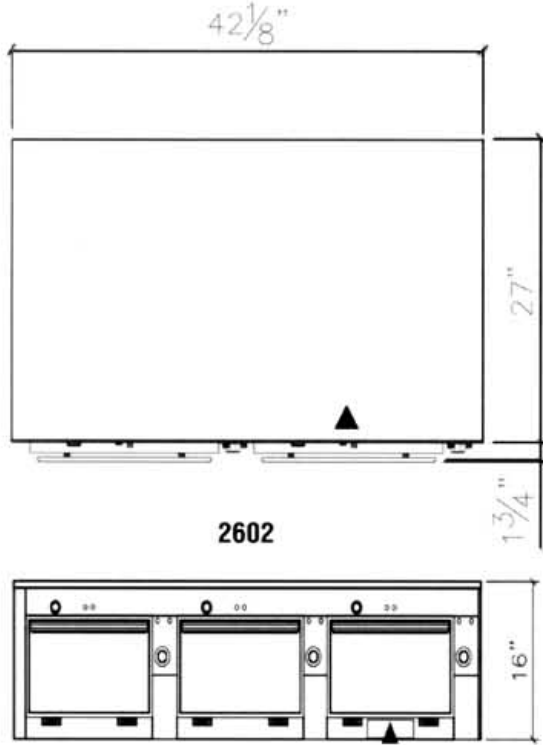

Catalog No. THERMO-2602/2603 A.I.A. File No. 35-C-13

Catalog No. THERMO-2602/2603

THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES - 2602/2603

DIMENSIONS:

Freight Class: 100

Model	Width		Depth		Height		Comp. Depth		Cube ft. crated	Weight	
	in.	cm	in.	cm	in.	cm	in.	cm		lbs.	kg
2602	42-1/8	107.2	28-3/4	73.0	16	40.6	23-1/2	59.7	21.9	300	136.4
2602P	42-1/8	107.2	30-1/2	77.5	16	40.6	25-1/2	64.8	23.1	300	136.4
2603	62-1/4	158.1	28-3/4	73.0	16	40.6	23-1/2	59.7	31.0	375	170.5
2603P	62-1/4	158.1	30-1/2	77.5	16	40.6	25-1/2	64.8	32.7	375	170.5

ELECTRICAL SPECIFICATIONS: (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load
2602	1500 watts
2602P	1500 watts
2603	2250 watts
2603P	2250 watts

	2602/2602P	2603/2603P
Capacity w/standard slides	(6) 12" x 20" x 2" pans or (4) 12" x 20" x 4" pans or (2) 12" x 20" x 8" pans	(9) 12" x 20" x 2" pans or (6) 12" x 20" x 4" pans or (3) 12" x 20" x 8" pans

- 2602** Reach-In - hinged doors on front only
- 2602P** Pass-Thru - hinged doors on front & back for pass-thru service
- 2603** Reach-In - hinged doors on front only
- 2603P** Pass-Thru - hinged doors on front & back for pass-thru service



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

"Your Solutions Partner"

Specifications subject to change

Printed in U.S.A.
 ©2003, Duke Manufacturing Co.