



"Your Solutions Partner"

# Specifications

F.O.B Sedalia, Missouri 65301



TMD-48SS/TIF-48SS

### OPTIONS:

- 14 gauge tops
- Internal locking devices
- Lid locking bar and pins on top
- Display shelves
- Rubber corner bumpers - **TMOD-8**
- Pusher Bar - **TMOD-7**
- Tray slides - **TS3BTS-HD/FX, TSSOLID-HD/FX**
- Stainless steel legs - **TMOD-15**
- Veneered plastic laminate panels on body - **TSS-xP**
- Powder coat paint colors
- Pedestal electric outlet on top
- 8' or 10' cord and plug
- Wood, stainless steel or poly cutting boards
- Stainless steel kickplates
- J-hook to hold cord and plug

### Agency Listings



**DUKE MANUFACTURING CO.**  
2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free  
314.231.1130 In Missouri  
314.231.5074 Fax  
www.dukemfg.com

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_  
ITEM: \_\_\_\_\_  
QUANTITY: \_\_\_\_\_

### MODEL:

## Thurmaduke™ Serving Systems Milk/Ice Cream Units

- TMD-48** capacity: 252 half-pint peak top milk cartons
- TIF-48** capacity: 528 3oz ice cream cartons

### TOP:

- 16 gauge, 300 Series stainless steel
- Edges flanged down 2" on 90° on all four (4) sides
- Insulated stainless steel hinged lid

### DISPENSER MECHANISM:

- Removable, stainless steel dispensers
- Pan-type carrier - 20-1/2" x 20-1/2"
- System of springs and ball bearing guides

### REFRIGERATION:

- Four-wall copper refrigerant coils
- Thermostatic expansion valve - use with R-134A refrigerant
- 120 volt condensing unit
- 5' cord and plug - NEMA 5-15
- 38° F in milk cabinets
- -10° F to 0° F in ice cream cabinets

### LINER:

- Welded, stainless steel liner
- 1" IPS thermoplastic drain, with stopper
- Foam-in-place polyurethane insulation - 2-1/2" on sides, 1-3/8" on bottom

### BODY:

- Choice of (12) powder coat paint colors (must choose one):
 

<input type="checkbox"/> #217105 - Designer White	<input type="checkbox"/> #217103 - Natural Almond
<input type="checkbox"/> #217150 - Orange Red	<input type="checkbox"/> #217154 - Racing Red
<input type="checkbox"/> #217107 - Hollyberry Red	<input type="checkbox"/> #217120 - Sky Blue
<input type="checkbox"/> #217127 - Fence Green	<input type="checkbox"/> #217152 - Stone Gray
<input type="checkbox"/> #217102 - Duke Silver	<input type="checkbox"/> #217113 - Brown Kickplate
<input type="checkbox"/> #217101 - Semi-Gloss Black	<input type="checkbox"/> #217125 - Textured Black
- Stainless steel body
- Sides and ends fully enclosed
- NSF approved, 5" diameter polyurethane casters, 2 with brakes


### SHORT FORM SPECIFICATIONS:

**Thurmaduke™ Serving Systems - Milk/Ice Cream Units.** Top shall be constructed of 16 gauge, 300 Series stainless steel, with outside edges flanged down 2" at 90° on all four sides and flush with body on ends.. Vinyl foam tape used between top and body for sound-deadening. Units to have opening in top and provided with hinged folding lid. Body to be free standing and formed of heavy gauge steel with specified powder coat paint color or 300 Series stainless steel. Sides and ends to be fully enclosed. A temperature of 38° F in milk cabinets and - 10° F to 1° F in ice cream cabinets (adjustable) shall be maintained by means of four-wall copper refrigerant coils and an accessible thermostatic expansion valve for use with R-134A refrigerant. Welded stainless steel interior liner shall be water-tight, and separated from top by full perimeter plastic breaker strips. Stainless steel adapter collar furnished. Bottom fitted with 1" IPS thermoplastic drain with stopper. Units shall be fully insulated with poured-in-place polyurethane insulation (2-1/2" on sides, 1-3/8" on bottom). To be mounted on NSF approved 5" diameter polyurethane casters, all swivel two with locks. Must add "PG" to model number for Paint Grip Bodies, "SS" for Stainless Steel Bodies. Specify compressor on right or left.



# Thurmaduke™

## THURMADUKE™ SERVING SYSTEMS MILK/ICE CREAM UNITS

- **TMD-46** capacity: 252 half-pint peak top milk cartons
- **TIF-46** capacity: 528 3oz ice cream cartons

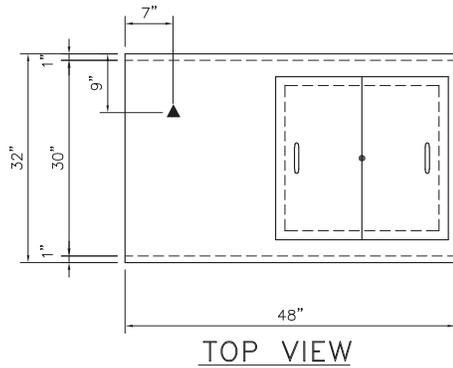

LEGEND	
▲	- ELECTRICAL CONNECTION - 5' cord and plug
●	- DRAIN LOCATION

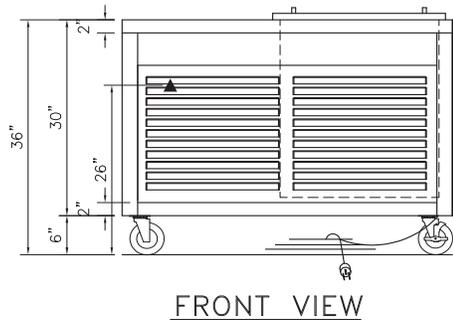

**DIMENSIONS:**

FREIGHT CLASS: 100

Model	Length		Width		Height		Cube ft. Crated	Weight	
	in.	cm	in.	cm	in.	cm		lbs.	kg
TMD-48	48	121.9	32	81.3	36	91.4	49.5	450	204.6
TIF-48	48	121.9	32	81.3	36	91.4	49.5	470	213.6

Model	Refrigerated Area					
	Length		Width		Depth	
TMD-48/TIF-48	23	58.4	23	58.4	26-1/2	67.3

NOTE: Available with compressor on right or left.

**ELECTRICAL SPECIFICATIONS:** (Consult factory for other options.)

Model	120 Volt/NEMA 5-15	
	Amps	HP
TMD-48	5.0	1/4
TIF-48	5.2	1/4

**DUKE MANUFACTURING CO.**  
2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free  
314.231.1130 In Missouri  
314.231.5074 Fax  
www.dukemfg.com



**"Your Solutions Partner"**

Specifications subject to change

01/07  
Printed in U.S.A.  
© 2007, Duke Manufacturing Co.