




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Three-Compartment Sink, model _____, with 2"-wide "Euro-Style" edging on front and sides. Sink bowls are heavy gauge type 304 stainless steel, with 13½" water level, deep drawn, seamless and have all corners covered. Top—including backsplash, and drainboards (when required)—is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9½" high backsplash with 1" upturn and tile edge. Legs to be 1½" O.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.

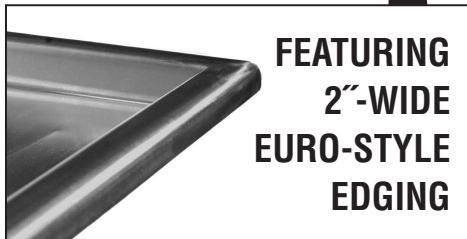

**FEATURING
2"-WIDE
EURO-STYLE
EDGING**

Options / Accessories

- | | |
|--|--|
| <input type="checkbox"/> Stainless steel legs | <input type="checkbox"/> Faucets |
| <input type="checkbox"/> Stainless steel bullet feet | <input type="checkbox"/> Sink covers |
| <input type="checkbox"/> Lever drains | <input type="checkbox"/> Waste outlets |
| <input type="checkbox"/> Twist handle drains | <input type="checkbox"/> Sink kits |
| <input type="checkbox"/> Twist drain brackets | <input type="checkbox"/> Overflow hole |

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • Fax: 302-653-2065
 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440
MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
 Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

414 Series Coved Corner Three-Compartment Sinks

MODELS:

- | | | | |
|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| <input type="checkbox"/> 414-16-3 | <input type="checkbox"/> 414-18-3 | <input type="checkbox"/> 414-22-3 | <input type="checkbox"/> 414-24-3 |
| <input type="checkbox"/> 414-16-3-18 | <input type="checkbox"/> 414-18-3-18 | <input type="checkbox"/> 414-22-3-18 | <input type="checkbox"/> 414-24-3-18 |
| <input type="checkbox"/> 414-16-3-18L | <input type="checkbox"/> 414-18-3-18L | <input type="checkbox"/> 414-22-3-18L | <input type="checkbox"/> 414-24-3-18L |
| <input type="checkbox"/> 414-16-3-18R | <input type="checkbox"/> 414-18-3-18R | <input type="checkbox"/> 414-22-3-18R | <input type="checkbox"/> 414-24-3-18R |
| <input type="checkbox"/> 414-16-3-24 | <input type="checkbox"/> 414-18-3-24 | <input type="checkbox"/> 414-22-3-24 | <input type="checkbox"/> 414-24-3-24 |
| <input type="checkbox"/> 414-16-3-24L | <input type="checkbox"/> 414-18-3-24L | <input type="checkbox"/> 414-22-3-24L | <input type="checkbox"/> 414-24-3-24L |
| <input type="checkbox"/> 414-16-3-24R | <input type="checkbox"/> 414-18-3-24R | <input type="checkbox"/> 414-22-3-24R | <input type="checkbox"/> 414-24-3-24R |

Materials

- Sink bowls: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1½" (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

Design and Construction Features

- All bowls have deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowls have generous radius with minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13½" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9½" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is ½" (13mm) IPS for hot and cold lines.
- Faucet holes are 1½" (29mm) punched on 8" (203mm) centers; two sets of faucet holes are punched where indicated on chart (back page).
- Basket-type waste drain included fits sink bowls' 3½" (89mm) opening and features 1½" (38mm) outlet.

Certifications / Approvals



AUTOQUOTES



EG20.25 Rev. 10/12

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com



Eagle Foodservice Equipment, Eagle MHC, SpecFabAB® and Retail Display are divisions of Eagle Group. ©2012 by the Eagle Group



Profit from the Eagle Advantage®


Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

414 Series Coved Corner Three-Compartment Sinks



| Overall widths | | | |
|----------------|-----------|-------------|-----|
| bowl size | | Dimension A | |
| in. | mm | in. | mm |
| 20" x 16" | 508 x 406 | 27½" | 699 |
| 24" x 18" | 610 x 457 | 31¼" | 807 |
| 22" x 22" | 559 x 559 | 29¾" | 756 |
| 24" x 24" | 610 x 610 | 31¼" | 807 |

| Drain location for rough-in | | | |
|-----------------------------|-----------|-------------|-----|
| bowl size | | Dimension B | |
| in. | mm | in. | mm |
| 20" x 16" | 508 x 406 | 14" | 357 |
| 24" x 18" | 610 x 457 | 16" | 406 |
| 22" x 22" | 559 x 559 | 15" | 381 |
| 24" x 24" | 610 x 610 | 16" | 406 |



| model # | BOWL DIMENSIONS | | | | quantity | DRAINBOARD | | OVERALL DIMENSIONS | | | | weight | |
|--------------------|-----------------|--------|-------|--------|----------|------------|------|--------------------|--------|-------|--------|--------|------|
| | width | length | width | length | | in. | mm | width | length | width | length | lbs. | kg |
| 414-16-3 | 20" | 508 | 16" | 406 | 0 | - | 27½" | 699 | 58¾" | 1492 | 85 | 38.6 | |
| 414-16-3-18R or L | 20" | 508 | 16" | 406 | 1 | 18" | 457 | 27½" | 699 | 74¾" | 1889 | 104 | 47.2 |
| 414-16-3-18 | 20" | 508 | 16" | 406 | 2 | 18" | 457 | 27½" | 699 | 90" | 2286 | 123 | 55.8 |
| 414-16-3-24R or L | 20" | 508 | 16" | 406 | 1 | 24" | 610 | 27½" | 699 | 80¾" | 2042 | 110 | 49.9 |
| 414-16-3-24 | 20" | 508 | 16" | 406 | 2 | 24" | 610 | 27½" | 699 | 102" | 2591 | 135 | 61.2 |
| 414-18-3* | 24" | 610 | 18" | 457 | 0 | - | 31¼" | 807 | 65½" | 1664 | 114 | 51.7 | |
| 414-18-3-18R or L* | 24" | 610 | 18" | 457 | 1 | 18" | 457 | 31¼" | 807 | 80¾" | 2051 | 133 | 60.3 |
| 414-18-3-18* | 24" | 610 | 18" | 457 | 2 | 18" | 457 | 31¼" | 807 | 96" | 2438 | 152 | 68.9 |
| 414-18-3-24R or L* | 24" | 610 | 18" | 457 | 1 | 24" | 610 | 31¼" | 807 | 86¾" | 2203 | 139 | 63.1 |
| 414-18-3-24* | 24" | 610 | 18" | 457 | 2 | 24" | 610 | 31¼" | 807 | 108" | 2743 | 164 | 74.4 |
| 414-22-3* | 22" | 559 | 22" | 559 | 0 | - | 29¾" | 756 | 77½" | 1969 | 120 | 54.4 | |
| 414-22-3-18R or L* | 22" | 559 | 22" | 559 | 1 | 18" | 457 | 29¾" | 756 | 93" | 2362 | 139 | 63.1 |
| 414-22-3-18* | 22" | 559 | 22" | 559 | 2 | 18" | 457 | 29¾" | 756 | 108½" | 2756 | 158 | 71.6 |
| 414-22-3-24R or L* | 22" | 559 | 22" | 559 | 1 | 24" | 610 | 29¾" | 756 | 99" | 2515 | 145 | 65.8 |
| 414-22-3-24* | 22" | 559 | 22" | 559 | 2 | 24" | 610 | 29¾" | 756 | 120½" | 3061 | 170 | 77.1 |
| 414-24-3* | 24" | 610 | 24" | 610 | 0 | - | 31¼" | 807 | 83½" | 2121 | 125 | 56.7 | |
| 414-24-3-18R or L* | 24" | 610 | 24" | 610 | 1 | 18" | 457 | 31¼" | 807 | 98¾" | 2508 | 144 | 65.3 |
| 414-24-3-18* | 24" | 610 | 24" | 610 | 2 | 18" | 457 | 31¼" | 807 | 114" | 2896 | 163 | 73.9 |
| 414-24-3-24R or L* | 24" | 610 | 24" | 610 | 1 | 24" | 610 | 31¼" | 807 | 104¾" | 2661 | 150 | 68.0 |
| 414-24-3-24* | 24" | 610 | 24" | 610 | 2 | 24" | 610 | 31¼" | 807 | 126" | 3200 | 175 | 79.4 |

* Features two sets of faucet holes.

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • Fax: 302-653-2065
 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440
 MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.
 ©2012 by Eagle Group

Rev. 10/12

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.