

Profit from the Eagle Advantage®

# **Specification Sheet**

**PATENTED** 

**Unique Roller Design** 

(patent #5,680,942)

Easy rolling.

# **Short Form Specifications**

Eagle Master Trak® Overhead Track Storage System to consist of front and rear track sections and all hardware. Mobile units to consist of posts, casters, and all parts and hardware necessary to connect unit to tracks. Stationary units on each end consist of posts, footplates and hardware necessary to connect unit to tracks. All shelves sold separately.

binding due to uneven floors. Supports track.		
5	mobile units	stationary

# **Options / Accessories**

- Ledges
- Dividers
- Shelf markers
- ☐ Rods & tabs

# **EAGLE GROUP**

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

Item No.:	
Project No.:	
S.I.S. No.:	

# Master Trak® Overhead Track High-Density Storage System

<b>□</b> EP74-*	■ MUK18-*	■ MUK24-*	■ MUK36-
□ <i>EP86-*</i>	□ MUK21-*	□ MUK30-*	□ OHT-*

# **Design and construction features**

- Patented QuadTruss® design (patent #5,390,803) makes shelves\* up to 25% stronger and provides a retaining ledge for increased storage stability and product retention.
- Unique roller assembly (patent #5,680,942) eliminates binding which can occur in other track systems and allows longer track length without a stationary intermediate unit.
- Maximum storage in a minimum of space.
- · Quick and easy assembly.
- · Requires only single-aisle access.
- Provides for easier cleaning with safe access to all units.
- Wide selection of shelving\* sizes and finishes, including EAGLEbrite® zinc, chrome, Valu-Master® gray epoxy, and EAGLEgard® (with MICROGARD® antimicrobial protection) green epoxy.

## **Overhead Track Kits**

- Includes all necessary sections of front and rear tracks for assembling lengths of 6' to 21', plus all hardware.
- Any kits 9' or longer include two or more front and rear track sections with joiner pieces and all hardware.
- A mid-stationary unit is recommended on lengths of over 30°.
- Kits 13' (3962mm) and longer are wood-crated.
- Special lengths available.

# Stationary End/Intermediate Unit Kits\*

- Includes all hardware and posts necessary for connecting stationary units to track.
- Units must be anchored to the floor to prevent movement.
- One kit required for each stationary unit.

# Mobile Unit Kits\*

- Includes posts, casters and all parts and necessary hardware.
- Casters are 5" x 11/2", with polymer tread.
- One kit required for each mobile unit.
- \*Shelves sold separately.

# Certifications / Approvals





For custom configuration or fabrication needs, contact our **SpecFAB® Division**. Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com


EG01.18 Rev. 03/12

<sup>\*</sup> See charts on back page for full model numbers.



Item No.:	_
Project No.:	_
S.I.S. No.:	_

# Master Trak® Overhead Track High-Density Storage System

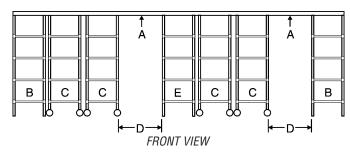

- A: Overhead Track Kits
- B: Stationary End Units
- C: Mobile Units
- **D:** Open aisle—30" to 36" (762 to 914mm) is recommended
- E: Stationary Mid Unit (optional—use same model # as Stationary End Unit Kit)

# **Overhead Track Kits**

model #	lei ft.	ngth mm	wei lbs.	ght kg	model #	le: ft.	ngth mm	wei lbs.	ght ka
				_					_
OHT-6	6′	1829	18	8.2	OHT-14	14′	4267	42	19.1
OHT-7	7′	2134	21	9.5	OHT-15	15′	4572	45	20.4
OHT-8	8′	2438	24	10.9	OHT-16	16′	4877	48	21.8
OHT-9	9′	2743	27	12.2	OHT-17	17′	5181	51	23.1
OHT-10	10′	3048	30	13.6	OHT-18	18′	5486	54	24.5
OHT-11	11′	3353	33	15.0	OHT-19	19′	5791	57	25.9
OHT-12	12′	3658	36	16.3	OHT-20	20′	6096	60	27.2
OHT-13	13′	3962	39	17.7	OHT-21	21′	6401	63	28.6

# Stationary End/Intermediate Unit Kits...

# ...WITH 74"-HIGH POSTS

<b>EAGLEbrite®</b>	chrome	me EAGLEgard®		ght
model #	model #	model #	lbs.	kg
EP74-Z *	EP74-C	EP74-E	17	7.7

### ...WITH 86"-HIGH POSTS

WIIH 80 -HI	PH 50919			
<b>EAGLEbrite®</b>	chrome	<b>EAGLEgard®</b>	wei	ght
model #	model #	model #	lbs.	kg
EP86-Z *	EP86-C	EP86-E	21	9.5

<sup>\*</sup> Can be used with both EAGLEbrite® and Valu-Master® shelves.

# **Safety Notes:**

- Stationary End/Intermediate Units must have a minimum of four shelves. Mobile units should have top shelf positioned as close to track as possible.
- The width of the Stationary End/Intermediate Units should be the same or bigger than the width of the mobile units.
- Standard Master Trak® systems require 74" (1880mm) posts on the Stationary End/ Intermediate Units. Shelves sold separately.
- 900 lbs. (408 kg) total is the max weight capacity for Mobile Units.
- Recommended aisle widths are 30"-36" (762-914mm). However, larger items stored within the system may require an aisle width over 36" (914mm).

# Mobile Unit Kits...

# ...WITH 74"-HIGH POSTS \*

<b>EAGLE</b> brite®	chrome	<b>EAGLEgard®</b>	width		weight	
model #	model #	model #	in.	mm	lbs.	kg
MUK18-Z	MUK18-C	MUK18-E	18″	457	33	15.0
MUK21-Z	MUK21-C	MUK21-E	21"	533	34	15.4
MUK24-Z	MUK24-C	MUK24-E	24"	610	35	15.9
MUK30-Z	MUK30-C	MUK30-E	30"	762	35	15.9
MUK36-Z	MUK36-C	MUK36-E	36"	914	36	16.3

# ...WITH 86"-HIGH POSTS \*

<b>EAGLE</b> brite <sup>®</sup>	chrome	<b>EAGLEgard®</b>	wi	dth	wei	ght
model #	model #	model #	in.	mm	lbs.	kg
MUK18-Z86	MUK18-C86	MUK18-E86	18″	457	37	16.8
MUK21-Z86	MUK21-C86	MUK21-E86	21"	533	38	17.2
MUK24-Z86	MUK24-C86	MUK24-E86	24"	610	39	17.6
MUK30-Z86	MUK30-C86	MUK30-E86	30"	762	39	17.6
MUK36-Z86	MUK36-C86	MUK36-E86	36"	914	40	18.1

NOTE: Master Trak® units must be mounted to allow proper clearance from wall or other obstructions that would hinder operation of mobile units. Walls must be plumb and straight to prevent contact with mobile units. Floors must be flat, level and smooth. Failure to comply will void the warranty of the Master Trak® Storage System.

### **EAGLE GROUP**

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100 Printed in U.S.A. ©2012 by Eagle Group

Rev. 03/12

<sup>\*</sup> Casters included in post heights