

Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Panco® Double-Compartment Rack, aluminum model _. Constructed of 1" square tubular aluminum frame and supports. Bottom frame to be 1" x 2" all-welded aluminum rectangular tubing. 1\%" x 1\%" extruded aluminum angle tray slides. Slide spacing is 5", 3", or 21/4" to accommodate (22, 36, or 48) 18" x 26" sheet pans. Furnished with 5"-diameter casters. Shipped assembled.

Eagle Panco® Double-Compartment Rack, stainless steel model _____. Constructed of all-welded heavy gauge stainless steel tubing. Tray slides to be 16 gauge stainless steel angle 1½" x 1¾" with raised bead edge. Slide assembly removable without the use of tools. Slide spacing is 5", 3", 24" to accommodate (22, 36, or 48) 18" x 26" sheet pans. Furnished with 5"-diameter casters. Shipped assembled.



double-compartment rack model #OUR-1836-3

Options / Accessories

- ☐ Casters with locking brakes ☐ Vertical corner bumpers
- ☐ Rotary donut bumpers
- ☐ Perimeter bumpers
- ☐ Pan stops for Double Racks

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division. Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

Panco® Double-Compartment **Racks**

MODELS:

□ OUR-1822-5

□ OUR-1836-3

□ OUR-1848-2

□ OUR-1822-5-SR

□ OUR-1836-3-SR

□ OUR-1848-2-SR

Features on Aluminum Double-Compartment Racks

- Upper frame and cross supports: 1" (25mm) square aluminum tubing with 0.063" wall.
- Bottom frame: 1" x 2" (25 x 51mm) thick aluminum rectangular tubing, all welded construction.
- Tray slides: Extruded aluminum angle 1\%" high x 1\%" x 0.068" thick (189 x 48 x 2mm). Bearing surface with raised beads providing a minimum of friction. Slides are riveted to frame.
- Casters: 5" (127mm)-diameter NSF-approved, non-marking rubber tired wheels on swivel stem casters.

Features on Stainless Steel Double-Compartment Racks

- Frame and cross supports: 1" (25mm) square with heavy gauge wall stainless tubing, all welded construction.
- Tray slides: 16 gauge stainless steel formed angle 1½" high x 1¾" (38 x 45mm) lip with a raised bead edge, riveted to 1"x 1" (25 x 25mm) stainless steel vertical tube. Slide assembly removable without the use of tools.
- Casters: 5" (127mm)-diameter NSF-approved, non-marking rubber tired wheels on swivel stem casters.






EG60.06A Rev. 08/08



Item No.:	
Project No.:	
S.I.S. No.:	

Panco® Double-Compartment Racks

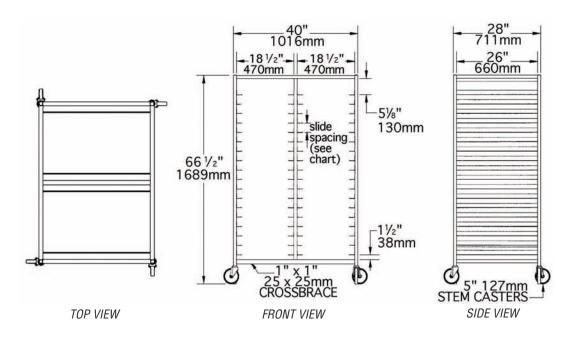

(model #OUR-1836-3 shown)

Aluminum Racks

	overall dimensions						ing			
	width		depth		height	space		pan	wei	ight
model #	in.	mm	in.	mm	in. mm	in.	mm	capacity	lbs.	kg
OUR-1822-5	40"	1016	28"	711	66½″ 1689	5″	127	22	135	61.2
OUR-1836-3	40"	1016	28"	711	66½″ 1689	3″	76	36	150	68.0
OUR-1848-2	40″	1016	28″	711	66½″ 1689	21/4"	57	48	176	79.8

Stainless Steel Racks

		— ov	erall d	imensi	ons ——	slid	ing		
	width		depth		height	space		pan	weight
model #	in.	mm	in.	mm	in. mm	in.	mm	capacity	lbs. kg
OUR-1822-5-SR	40"	1016	28″	711	66½″ 1689	5″	127	22	270 122.5
OUR-1836-3-SR	40"	1016	28"	711	66½″ 1689	3″	76	36	300 136.1
OUR-1848-2-SR	40"	1016	28″	711	66½″ 1689	21/4"	57	48	350 158.8

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A. ©2008 by Eagle Group Rev. 08/08