



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Stainless Steel Fabricated Sink, model _____.
Type 304 stainless steel sink throughout. Sink bowls, available in 20" x 20" or 28" x 20", are covered with full 3/4" radius and feature 14" water level. Drainboards, when required, shall be "V" creased for positive drainage. 8"-high backsplash with 3/4" upturn and tile edge. Legs to be 1 1/2" O.D. Features stainless steel gussets, front-to-rear and end-to-end stainless steel crossbracing, and adjustable stainless steel bullet feet.



#S14-20-3-18-SL sink

Options / Accessories

- Lever drain
- Lever drain with overflow
- Twist handle drain
- Overflow hole
- Faucets

EAGLE GROUP
100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • Fax: 302-653-2065
www.eaglegrp.com

Foodservice Division: Phone 800-441-8440
MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Eagle Foodservice Equipment, Eagle MHC, SpecFAB®, and Retail Display are divisions of Eagle Group. ©2011 by the Eagle Group

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

Stainless Steel Fabricated Sinks —S14 Series

MODELS:

- | | | |
|--|--|--|
| <input type="checkbox"/> S14-20-1-SL | <input type="checkbox"/> S14-20-3-18R-SL | <input type="checkbox"/> S14-20-3-24L-SL |
| <input type="checkbox"/> S14-20-2-18R-SL | <input type="checkbox"/> S14-20-3-18L-SL | <input type="checkbox"/> S14-20-3-24-SL |
| <input type="checkbox"/> S14-20-2-18L-SL | <input type="checkbox"/> S14-20-3-18-SL | <input type="checkbox"/> S14-28-3-18-SL |
| <input type="checkbox"/> S14-20-2-18-SL | <input type="checkbox"/> S14-20-3-24R-SL | |

Materials

- Sink bowls: 14 gauge type 304 stainless steel.
- Top: Drainboards, backsplash and edging are heavy gauge type 304 stainless steel.
- Legs: 1 1/2" (41mm)-diameter 18 gauge stainless steel tubing with stainless steel gussets and fully adjustable stainless steel bullet feet.
- Crossbracing: 1" (25mm)-diameter heavy-gauge stainless steel tubing, with aluminum connectors.
- Front apron: 18 gauge stainless steel.

Design and Construction Features

- Sink bowls have minimum radius of 3/4" (19mm), and are rectangular for maximum capacity.
- 20" x 20" (508 x 508mm) and 28" x 20" (508 x 711mm) bowls available.
- 14" (356mm) water level is standard.
- Crossbracing runs front-to-back and end-to-end.
- Swirl-away drainage.
- 8" (203mm) standard backsplash includes 3/4" (19mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- Leg gussets assemblies welded adjacent to sink bowl(s).
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is 1/2" (13mm) IPS for hot and cold lines.
- Faucet holes are 1 1/2" (30mm)-diameter, punched on 8" (203mm) centers.
- Basket-type waste drain included fits sink bowls' 3 1/2" (89mm) centered opening and features 1 1/2" (38mm) outlet.

Packaging:

- Wooden skid packing.


Certifications / Approvals





Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Stainless Steel Fabricated Sinks—S14 Series

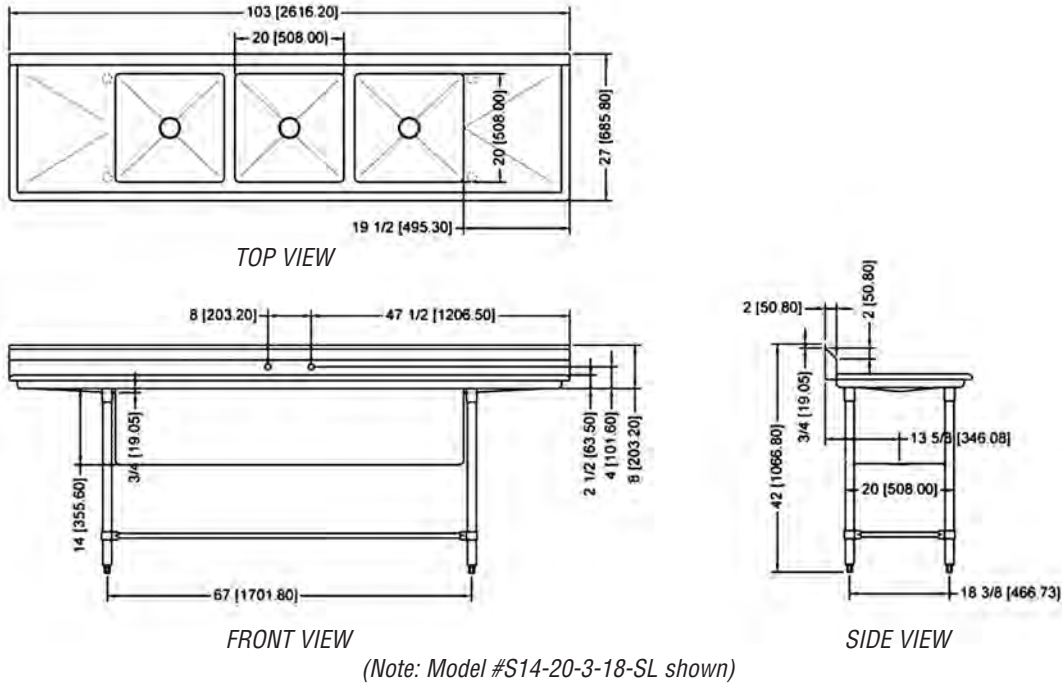

Sink with One Compartment

model #	BOWL DIMENSIONS		DRAINBOARD		OVERALL DIMENSIONS						
	width	length	length	length	width	length	width	length			
	in.	mm	in.	mm	quantity	in.	mm	in.	mm		
S14-20-1-SL	20"	508	20"	508	0	-	-	27"	686	29"	737

Sinks with Two Compartments

model #	BOWL DIMENSIONS		DRAINBOARD		OVERALL DIMENSIONS						
	width	length	length	length	width	length	width	length			
	in.	mm	in.	mm	quantity	in.	mm	in.	mm		
S14-20-2-18R-SL	20"	508	20"	508	1	18"	457	27"	686	67 1/2"	1715
S14-20-2-18L-SL	20"	508	20"	508	1	18"	457	27"	686	67 1/2"	1715
S14-20-2-18-SL	20"	508	20"	508	2	18"	457	27"	686	81"	2057

Sinks with Three Compartments

model #	BOWL DIMENSIONS		DRAINBOARD		OVERALL DIMENSIONS						
	width	length	length	length	width	length	width	length			
	in.	mm	in.	mm	quantity	in.	mm	in.	mm		
S14-20-3-18R-SL	20"	508	20"	508	1	18"	457	27"	686	89 1/2"	2273
S14-20-3-18L-SL	20"	508	20"	508	1	18"	457	27"	686	89 1/2"	2273
S14-20-3-18-SL	20"	508	20"	508	2	18"	457	27"	686	103"	2616
S14-20-3-24R-SL	20"	508	20"	508	1	24"	610	27"	686	95 1/2"	2426
S14-20-3-24L-SL	20"	508	20"	508	1	24"	610	27"	686	95 1/2"	2426
S14-20-3-24-SL	20"	508	20"	508	2	24"	610	27"	686	115"	2921
S14-28-3-18-SL	28"	711	20"	508	2	18"	457	35"	889	103"	2616

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • Fax: 302-653-2065
 www.eaglegrp.com

Foodservice Division: Phone 800-441-8440
 MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.
 ©2011 by Eagle Group
 Rev. 03/11

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.