



EMPower 2 Zone Electric Induction Top 16"

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



EMPower

2 Zone Electric Induction Top 16"

169107 (AIZ16)

EMPower Restaurant Range induction top, electric, 16" wide, 2 each 3.5 kW (7 kW total) independently controlled zones with 4" adjustable, removable legs

Short Form Specification

Item No.

Unit to be Electrolux Two (2) Zone Electric Induction Top. Unit to have a 6 mm thick seamless Ceran® glass cooking surface with two (2) independently controlled 3,5 kW induction zones. Control knobs provide smooth, continuous rotation from min to max power level. Power ON lamp for each zone located on the glass surface. Induction plates with overheating safety device. Full length Stainless Steel air filter removable for easy cleaning. All major components can be accessed from the front of the appliance for ease of maintenance. Worktop in AISI 304 Stainless Steel. Front and side panels in Stainless Steel with Scotch Brite finish. Special heavy duty chrome plated knobs for durability and easy cleaning. The configuration of bezels and knobs provides high level of protection against water infiltrations. Right-angled side edges to allow flush fitting joints between units. Supplied with 4" (102 mm) height adjustable, removable legs. Unit may be installed on refrigerated base or open cupboard.

Main Features

- This unit can not be installed on oven base.
- 6 mm thick glass-ceramic cooking surface with two (2) independently controlled 3,5 kW induction zones.
- Control knobs provide smooth, continuous rotation from min to max power level.
- Power ON lamp for each zone located on the glass surface.
- Induction plates endowed with overheating safety device.
- Full length Stainless Steel air filter removable for easy cleaning.
- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- All major components can be accessed from the top and front of the appliance for ease of maintenance.
- Front and side panels in Stainless Steel with Scotch Brite finish.
- Special heavy duty chrome plated knobs for durability and easy cleaning.
- The configuration of bezels and knobs provides high level of protection against water infiltrations.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Provided with kit for side-by-side connection between units for minimizing gaps and possible dirt traps.
- Supplied with 4" (102mm) height adjustable, removable legs.
- Unit may be installed on refrigerated base by removing the legs and inserting the special pins (optional accessory).
- Unit may be installed on open cupboard by removing the legs and inserting the screws provided as standard with the open cupboards.
- In compliance with ETL Certification (UL & NSF).

Construction


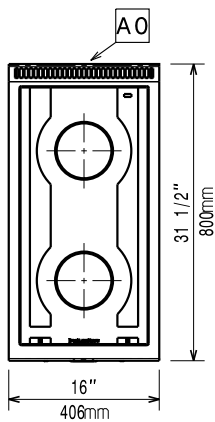
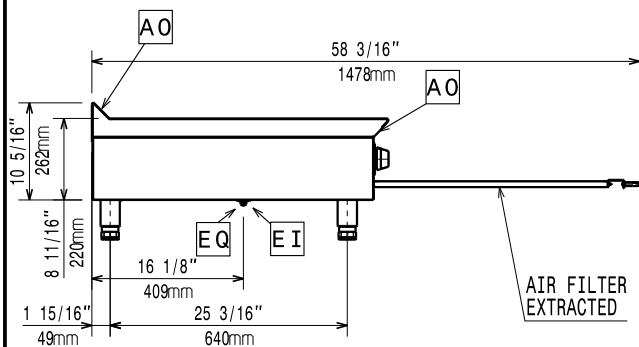
- Worktop in 304 AISI stainless steel.

Optional Accessories

- 4 Pins Kit, for top equipment on refrigerated base PNC 169048
- Back shelf for wall installation, 16"unit PNC 169097



APPROVAL: _____

Front

Top

EI = Electrical connection
Side

Electric

Supply voltage:	169107 (AIZ16)	200-240 V/1 ph/50/60 Hz
Amps:		30 A
Total Watts:		7 kW

Key Information:

Induction Top Dimensions (width):	16 " (406 mm)
Induction Top Dimensions (depth):	31 1/2" (800 mm)
External dimensions, Width:	16 " (406 mm)
External dimensions, Depth:	31 1/2" (800 mm)
External dimensions, Height:	14 5/8" (372 mm)
Net weight:	66 lbs (30 kg)
Shipping width:	17 15/16" (456 mm)
Shipping depth:	36 1/16" (916 mm)
Shipping height:	25 1/2" (648 mm)
Shipping weight:	77 lbs (35 kg)
Shipping volume:	9.56 ft ³ (0.27 m ³)