



Electrolux

EMPower Gas Solid Top 36"

ITEM #

MODEL #

NAME #

SIS #

AIA #



Electrolux



EMPower

Gas Solid Top 36"

169108 (ASG36)

(ASG36) EMPower Restaurant Range, gas, 36", countertop, solid top, cast iron solid top, removable circular ring, 1/2 gallon drawer below cooking surface, safety pilot, manual controls, propane converter kit, pressure regulator, main shut-off valve, hook for removal of circular ring, stainless steel construction, 4" adjustable removable legs, 27,000 BTU, 8.0 kW, ETL

Short Form Specification

Item No.

Unit to be Electrolux Gas SolidTop with single, central high efficiency 27,000 BTU (8 kW) burner. Suitable for natural gas or propane gas. Cast iron cooking top is recessed 1,2" (30mm) to allow for pots and pans to be moved across the surface without the need for lifting. Cooking surface with different heating zones ranging from 950°F (500°C) at the center to 390° F (200°C) at the outer edges. 100% safety pilot. Flame failure device as standard on burner to protect against accidental extinguishing. Half Gallon (2 L) drawer below the cooking surface captures all overflow and debris and can be easily extraced for dumping or cleaning. All major components can be accessed from the top and front of the appliance for ease of maintenance. Worktop in AISI 304 Stainless Steel. Front and side panels in Stainless Steel with Scotch Brite finish. Special heavy duty chrome plated knob for durability and easy cleaning. The configuration of bezel and knob provides high level of protection against water infiltrations. Right-angled side edges to allow flush fitting joints between units. Supplied with 4" (102mm) height adjustable, removable legs. Unit may be installed on refrigerated base or open cupboard.

Main Features

- 100% safety pilot.
- All major components can be accessed from the top and front of the appliance for ease of maintenance.
- Durable cast iron cooking plate, easy to clean.
- Front and side panels in Stainless Steel with Scotch Brite finish.
- Provided with kit for side-by-side connection between units for minimizing gaps and possible dirt traps.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Special heavy duty chrome plated knob for durability and easy cleaning.
- Supplied with 4" (102mm) height adjustable, removable legs.
- The configuration of bezels and knobs provides high level of protection against water infiltrations.
- Unit may be installed on open cupboard by removing the legs and inserting the screws provided as standard with the open cupboards.
- Unit may be installed on refrigerated base by removing the legs and inserting the special pins (optional accessory).
- Single, central high efficiency 27,000 BTU (8 kW) gas burner.
- Cast iron cooking top is recessed 1,2" (30mm) to allow for pots and pans to be moved across the surface without the need for lifting. Cooking surface with different heating zones ranging from 950°F (500°C) at the center to 390°F (200°C) at the outer edges.
- Removable circular ring positioned at center of cooking surface and directly over the burner.
- Half gal. (2 l) drawer below the cooking surface captures all overflow and debris and can be easily extracted for dumping or cleaning.
- Flame failure device protects against accidental extinguishing of the flame.
- Included Accessories: propane converter kit, pressure regulator, main shut off valve and hook for removal of cooking surface central ring.

Construction

- Worktop in 304 AISI stainless steel.
- [NOT TRANSLATED]

Optional Accessories

- 4 Pins Kit, for top equipment on refrigerated base PNC 169048
- Back shelf for wall installation, 36 "unit PNC 169099

APPROVAL:

Electrolux Professional, Inc.

www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401


EMPower
Gas Solid Top 36"




Electrolux

EMPower Gas Solid Top 36"

Front

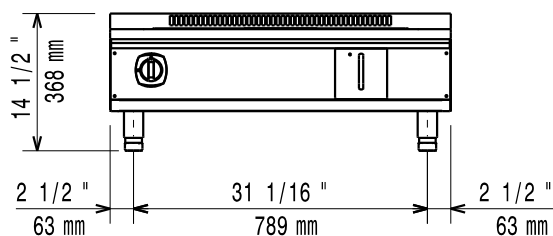


Top

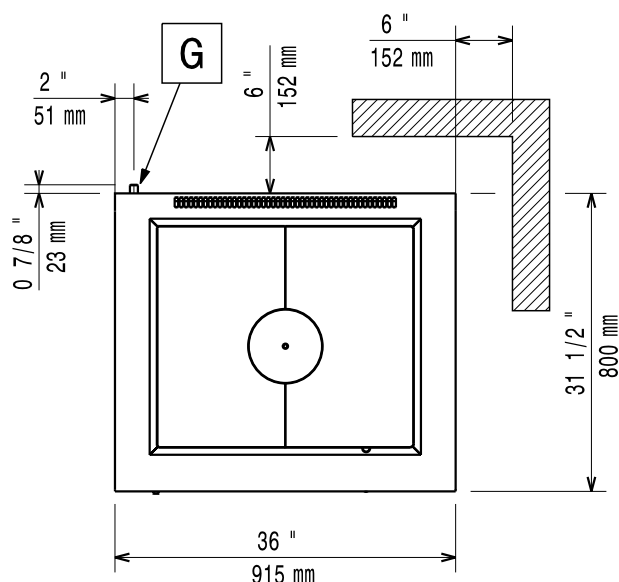

G = Gas connection

Side

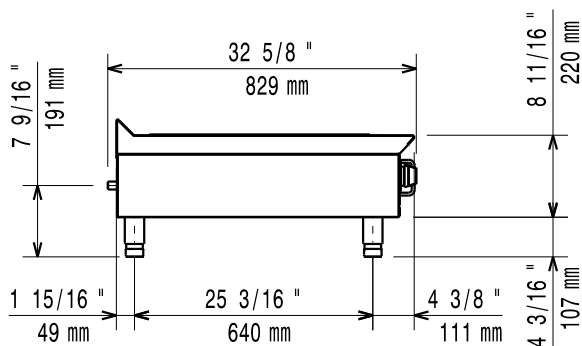

Gas

Gas Power:

169108 (ASG36)

27000 Btu/hr (8 kW)

Gas Inlet:

3/4"

Key Information:

Solid top usable surface

(width): 27 3/16" (690 mm)

Solid top usable surface

(depth): 23 1/4" (590 mm)

External dimensions, Width: 36 1/32" (915 mm)

External dimensions, Depth: 31 1/2" (800 mm)

External dimensions, Height: 14 5/8" (372 mm)

Net weight: 146 lbs (66 kg)

Shipping width: 41 5/16" (1050 mm)

Shipping depth: 38 9/16" (980 mm)

Shipping height: 29 15/16" (760 mm)

Shipping weight: 216 lbs (98 kg)

Shipping volume: 27.61 ft³ (0.78 m³)

*The rear and side clearances shown on the diagram indicate the minimum distances recommended from the appliance to combustible surfaces.