

EMPower Gas Convection Oven Base - 36"

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



EMPower

Gas Convection Oven Base - 36"

169110 (AFFG36)

EMPower Restaurant Range 41,000 BTU gas convection oven base 36" freestanding with 6" adjustable, removable legs

Short Form Specification

Item No.

Unit to be Electrolux 36" (915 mm) Convection Gas Oven Base. Suitable for natural gas or propane gas. Special heavy duty chrome plated knobs for durability and easy cleaning. The configuration of bezels and knobs provides high level of protection against water infiltrations. Supplied with 6" (150 mm) height adjustable, removable legs. Unit may be installed on castors. 36" (915 mm) convection oven 41,000 BTU/hr (12 kW) with even heat distribution thanks to the bi-functional fan which works either continuously or synchronized with the burner. Vitreous enameled oven interior accommodates three standard Imperial full size $18" \times 26" (457 \text{ mm x} 660 \text{ mm})$ sheet pans. The interior is $26-29/32" \text{ w} \times 26-15/32" \text{ d} \times 14-57/64" \text{ h} (683 \text{ mm w} \times 672 \text{ mm} \text{ d} \times 378 \text{ mm} \text{ h}).$ 100% safety pilot with thermocouple and electric ignition. Manual oven shutoff valve. Heavy duty thermostat with temperature range from 150°F to 600°F (65°C to 315°C). Oven supplied with three stainless steel tray racks.

Main Features

Oven Information:

- 36" (915 mm) convection oven 41,000 BTU/hr (12 kW) with bi-functional fan to provide even cooking temperatures throughout the cavity.
- Vitreous enameled oven interior accommodates three standard Imperial full size 18" x 26" (457 mm x 660 mm) sheet pans.
- The interior is 26-29/32" w x 26-15/32" d x 14-57/64" h (683 mm w x 672 mm d x 378 mm h).
- 100% safety pilot and thermocouple.
- Electric ignition.
- Manual oven shut-off valve.
- Heavy duty thermostat with temperature range from 150°F to 600°F (65°C to 315°C).
- Oven supplied with three stainless steel tray racks.
- Bi-functional fan: works either continuously or synchronized with the burner.

General Information:

- Front and side panels in Stainless Steel with Scotch Brite finish.
- Special heavy duty chrome plated knobs for durability and easy cleaning.
- The configuration of bezels and knobs provides high level of protection against water infiltrations.
- Supplied with 6" (150 mm) height adjustable, removable legs.
- Unit may be installed on castors.
- Included Accessories: propane converter kit, pressure regulator and main shut off valve.

Optional Accessories


•	Kit of 4 wheels (2 swivel) with	PNC
	brake	2061


PNC 206135 □

APPROVAL:




EMPower Gas Convection Oven Base - 36"





EI = Electrical connection EQ = **Equipotential screw**

Gas connection

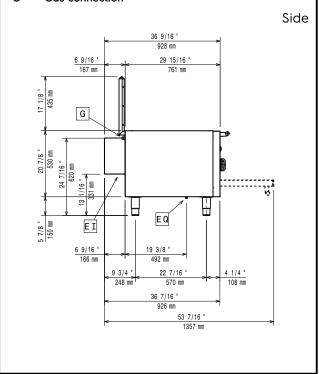

Electric

Supply voltage:

169110 (AFFG36) 120V/1 ph/60 Hz

Total Amp Load: 2A Electrical power: 0.25 kW Total Watts: 0.25 kW

Gas

Gas Inlet:

Gas Power Option: 41000 Btu/hr (12 kW)

Key Information:

Oven working Temperature:

150°F (65°C) MIN - 600°F

(315°C) MAX

Oven Cavity Dimensions

(width): 26 7/8" (683 mm)

Oven Cavity Dimensions

(depth): 26 7/16" (672 mm)

Oven Cavity Dimensions

(height):

14 7/8" (378 mm) 36 1/32" (915 mm)

External dimensions, Width: External dimensions, Depth: External dimensions, Height:

36 7/16" (926 mm) 36 1/32" (915 mm) 287 lbs (130 kg)

Net weight: Shipping width: Shipping depth: Shipping height: Shipping weight:

38 3/8" (975 mm) 41 3/4" (1060 mm) 45 1/4" (1150 mm)

309 lbs (140 kg) Shipping volume: 41.97 ft3 (1.19 m3)





