EMPower Mixed (1/3 Ribbed) Gas Griddle Top - 24"

ITEM #	
MODEL #	
NAME #	
SIS #	



EMPower

Mixed (1/3 Ribbed) Gas Griddle Top - 24"

169116 (ARG24FR)

EMPower Restaurant Range griddle, 24" wide, gas, 52,000 BTU, 1/3 ribbed top, with 4" adjustable, removable legs

Short Form Specification

Item No.

EMPower unit to be Electrolux Compact Line Ribbed Gas Griddle Top with three individually controlled high efficiency 26,000 BTU (7,6 kW) burners. Suitable for natural gas or propane gas. Thick 1" (25 mm) highly polished mild steel griddle plate maintains selected tEMPowerperatures and assures quick recovery. Stainless steel grease trough, one piece rolled front. Two large 1 gal. (3.8 lt) removable grease collector drawers. Insulated cooktop to conserve energy. Front, side and top panels of EMPower unit in Stainless steel with Scotch Brite finish. EMPower unit has right-angled side edges to allow flush-fitting junction between EMPower units.

In North America, products are covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.





APPROVAL:

Main Features

AIA#

- Three individually controlled high efficiency 7,6 kW burners.
- Thick 25 mm highly polished mild steel griddle plate maintains selected temperatures and assures quick recovery.
- Stainless steel grease trough, one piece rolled front.
- Two large 3.8 It removable grease collector drawers.
- Insulated cooktop to conserve energy.
- Flame failure device to protect against accidental extinguishing of the flame.
- All major compartments located in front of unit for ease of maintenance.
- Front, side and rear panels in Stainless Steel with Scotch Brite finish.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Kit for installation of top units to neutral bases and cupboards provided as standard.
- Included Accessories: propane converter kit, pressure regulator.

PNC 164255


In compliance with ETL Certification (UL & NSF).

Optional Accessories • Scraper for smooth griddle

	_
EMPower 4 pins kit for mounting unit The professional for mounting unit	PNC 169048
to refrigerated/freezer or open cupboard base	u
 To-wall pannel for wall installation, 24"unit 	PNC 169098
Portioning Shelf 12"	PNC 169173
Portioning Shelf 16"	PNC 169174
• Portioning Shelf 24"	PNC 169175
Scraper for ribbed griddle	PNC 206420



EMPower Mixed (1/3 Ribbed) Gas Griddle Top - 24"

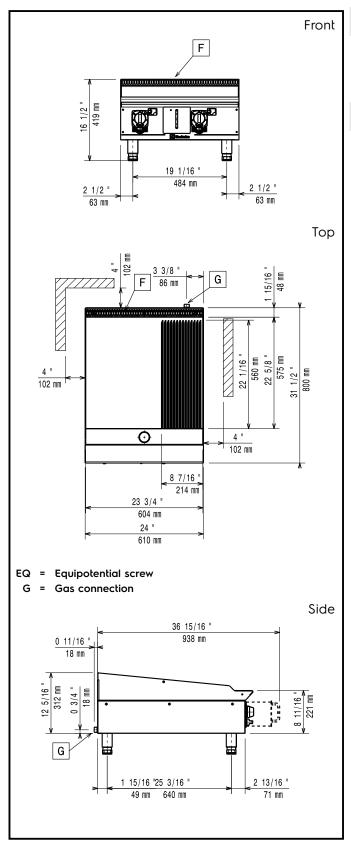

Gas

Gas Power:

169116 (ARG24FR) 52000 Btu/hr (15.2 kW)

Gas Type Option: Propane Gas Inlet: 3/4"

Key Information:

External dimensions, Width: 24 1/32" (610 mm) External dimensions, Depth: 31 1/2" (800 mm) External dimensions, Height: 16 1/2" (419 mm) Net weight: 159 lbs (72 kg) 35 7/16" (900 mm) Shipping width: Shipping depth: 26 " (660 mm) Shipping height: 25 1/2" (648 mm) Shipping weight: 176 lbs (80 kg) Shipping volume: 13.59 ft³ (0.38 m³)

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some

form of heat insulation fitted.