

### **EMPower** Eight (8) Open Gas Burner Top -48" with Safety Thermocouple

ITEM #	
MODEL #	
NAME #	
SIS #	



**EMPower** 

Eight (8) Open Gas Burner Top - 48" with Safety Thermocouple

169133 (ACG48T)

**EMPower Restaurant Range** burners, gas, 48" wide, (8) 32,500 BTU open burners with (4" adjustable, removable legs)

## **Short Form Specification**

#### Item No.

EMPower unit to be Electrolux Eight (8) Open Gas Burner Top, Individually controlled high efficiency 32,500 BTU (9.5 kW) Flower Flame burners. Control knobs provide smooth, continuous rotation from min to max. Suitable for natural gas or propane gas. Cast iron pan supports 12" x 12" (305 mm x 305 mm). Two crumb trays covering full width of appliance below the burners. All major components can be accessed from the top and front of the appliance for ease of maintenance. Worktop in AISI 304 Stainless Steel. Front and side panels in Stainless Steel with Scotch Brite finish. Special heavy duty chrome plated knobs for durability and easy cleaning. The configuration of bezels and knobs provides high level of protection against water infiltrations. Right-angled side edges to allow flush fitting between EMPower units. Supplied with 4" (102 mm) height adjustable, removable legs. EMPower unit may be installed on refrigerated base or open cupboard.





#### APPROVAL:

#### **Main Features**

AIA#

- Eight individually controlled high efficiency 32,500 BTU (9.5 kW) Flower Flame gas burners.
- Control knobs provide smooth, continuous rotation from min to max power level.
- No gaskets and removable one-piece venturis and burners for easy cleaning.
- The geometrics of the venturis and cast iron burners provides the maximum level of heating efficiency.
- The cast iron burners are anti-clogging.
- The cast iron pan supports 12"x12" (305mm x 305mm), thanks to the special configuration, allow for even small pots and pans to be placed over the flame.
- The cast iron pan supports allow to slide pots and pans from section to section as well as to protect the pilot from spilled food and debris.
- Two crumb trays covering full width of appliance below the burners capture all overflow and debris and can be easily extracted for dumping and cleaning.
- All major components can be accessed from the top and front of the appliance for ease of maintenance.
- Front and side panels in Stainless Steel with Scotch Brite
- Special heavy duty chrome plated knobs for durability and easy cleaning.
- The configuration of bezels and knobs provides high level of protection against water infiltrations.
- Right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Provided with kit for side-by-side connection between units for minimizing gaps and possible dirt traps.
- Supplied with 4" (102mm) height adjustable, removable legs.
- Unit may be installed on refrigerated base by removing the legs and inserting the special pins (optional
- Unit may be installed on open cupboard by removing the legs and inserting the srews provided as standard with the open cupboards.
- Included Accessories: propane converter kit, pressure regulator and main shut off valve.
- In compliance with ETL Certification (UL & NSF).
- Unit with thermocouple and flame failure device protects against accidental extinguishing of the flame (dedicated model).

#### Construction

• Worktop in 304 AISI stainless steel.

#### Optional Accessories

- EMPower 4 pins kit for mounting unit to PNC 169048 refrigerated/freezer or open cupboard
- PNC 169100 🗖 To-wall pannel for wall installation, 48 "unit

Portioning Shelf 12"

PNC 169173 🗖





## EMPower Eight (8) Open Gas Burner Top - 48 " with Safety Thermocouple

Portioning Shelf 16"
Portioning Shelf 24"
Portioning Shelf 36"
Portioning Shelf 36"
Portioning Shelf 48"
PNC 169175 □
PNC 169177 □



# **EMPower** Eight (8) Open Gas Burner Top - 48 " with Safety Thermocouple

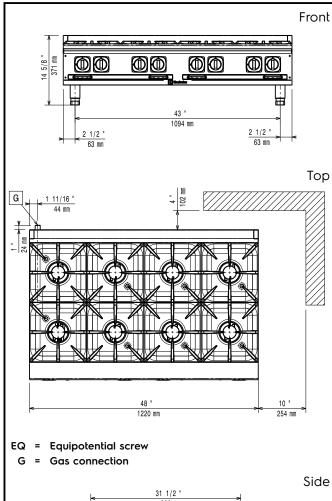



#### Gas

Gas Power:

169133 (ACG48T) 260000 Btu/hr (76 kW) 260000 Btu/hr (76 kW) Gas Power:

Gas Type Option: ;Propane Gas Inlet: 1/2"

#### **Key Information:**

9.5 - 9.5 kW (32385.5 -Front Burners Power: 32385.5 Btu/hr)

9.5 - 9.5/9.5 - 9.5 kW (32385.5 -

32385.5/32385.5 - 32385.5

Middle Burners Power: Btu/hr)

External dimensions, Width: 48 1/32" (1220 mm) External dimensions, Height: 14 5/8" (372 mm) Net weight: 245 lbs (111 kg) 50 9/16" (1284 mm) Shipping width: Shipping depth: 36 3/16" (919 mm) 27 1/16" (688 mm) Shipping height: Shipping weight: 276 lbs (125 kg) Shipping volume: 28.67 ft3 (0.81 m3)

\*The rear and side clearances shown on the diagram indicate the minimum distances reccomeneded from the

appliance to combustible surfaces.