



Electrolux

air-o-convect Touchline air-o-convect TOUCHLINE Boilerless Combi Oven 62 (gas)

ITEM # _____

MODEL # _____

NAME # _____


SIS # _____

AIA # _____



Electrolux

air-o-convect TOUCHLINE Boilerless Combi Oven 62 (gas)

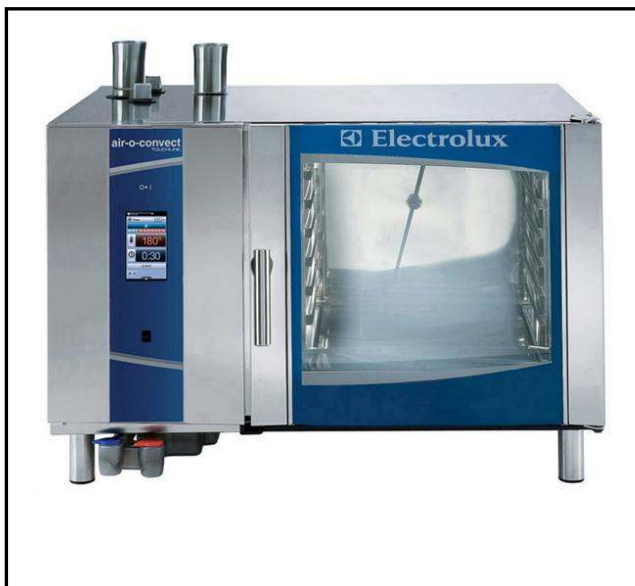

air-o-convect Touchline

air-o-convect TOUCHLINE Boilerless Combi Oven 62 (gas)

266751 (AOS062GKP1)

air-o-convect Touchline
Boilerless Combi Oven 62
120V/1ph/60Hz

Short Form Specification

Item No.

Unit to be Electrolux TOUCHLINE air-o-convect Boilerless Combi Oven (gas).
 air-o-convect performs all of the functions of a convection oven and has a boilerless steaming capabilities to add and retain moisture for high quality, consistent cooking cycles. Cooking modes include a convection (hot air) cycle 77 °F-572 °F (25°C-300°C) with an automatic moisture control function with 11 settings from zero to high moisture, double step cooking process, automatic pre-heating, a hold function and automatic rapid cooling. All 304 stainless steel construction, seamless hygienic cooking chamber with all rounded corners. Double thermo-glazed door with open frame construction for cool outside door panel. IPX5 (NEMA 4) spray water protection certification.
 air-o-clean™ automatic and built-in self cleaning system.

Covered by Electrolux Platinum Star® Service Program, two-year parts and one-year labor warranty, installation start-up and performance checkup after one year from installation.



APPROVAL: _____

Main Features

- Dry hot convection cycle 77 °F-572 °F (25°C-300°C) ideal for low humidity baking.
- Automatic moistener (11 settings) for boiler-less steam generation.
 - 0 = no additional moisture (air frying, dehydrating, baking, browning)
 - 1-2 = low moisture (roasting, grilling, searing, baking, cookies, cakes, grill cheese)
 - 3-4 = medium low moisture (au gratin vegetables, roasted meat and fish)
 - 5-6 = medium moisture (roasting small portions poultry, meet and fish, casserole, pizza)
 - 7-8 = medium-high moisture (Roasting and backing, large portions of meat, whole: chicken, turkey, ham)
 - 9-10 = high moisture (proofing, low temperature steaming, steam vegetables, rice, pasta, fish, shell fish, bagged product, sous vide, re-thermalization, baking)
- Programmability: up to 1000 recipes can be stored in the oven

Construction

- 304 AISI stainless steel construction throughout.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.

*Electrolux recommends a certified service agent perform equipment install and start-up, and an Electrolux certified chef be hired to train kitchen staff on equipment operation and maintenance.

Included Accessories

- 3 of Single 304 stainless steel full-size grid (21 "x26") PNC 922076

Optional Accessories

- Wheel kit for base for 61, 62, 101 and 102 oven bases PNC 922003
- Tray support, for 61 and 101 oven bases PNC 922021
- Tray support, for 62 and 102 oven bases PNC 922041
- Trolley, for roll-in rack for 62 and 102 oven PNC 922042
- Slide-in rack support with handle for 62 and 102 oven PNC 922047
- Fat filter for 61 and 62 oven PNC 922177
- Open base with rack guides for 62 and 102 oven PNC 922198
- Control Panel filter for 62 and 102 oven PNC 922247
- Double-click closing catch for oven door PNC 922265
- Stacking kit: 62 on top of 62 or 102 Gas oven PNC 922268
- 6 rack cassette for 62 oven (standard pitch) PNC 922269
- 5 rack cassette for 62 oven (increased pitch) PNC 922270
- Heat Shield for 62 oven PNC 922271

Electrolux Professional, Inc.

www.electroluxusa.com/professional


10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401




Electrolux

air-o-convect Touchline air-o-convect TOUCHLINE Boilerless Combi Oven 62 (gas)

Front

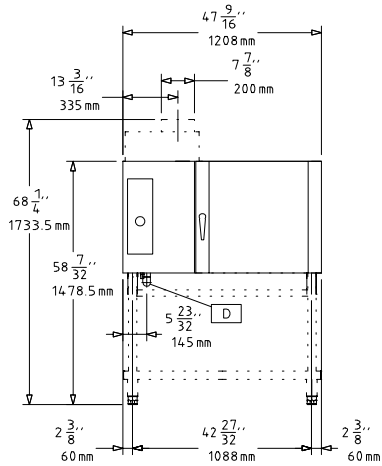


Top

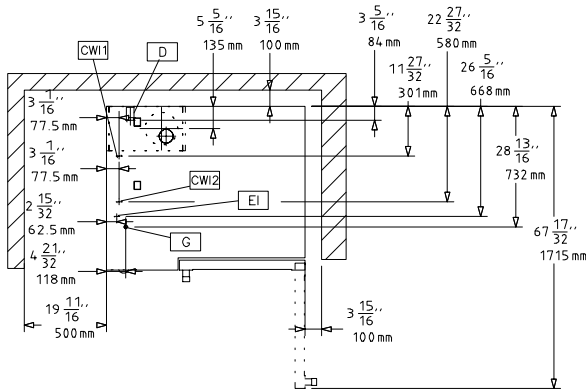

- CWI** = Cold Water inlet
- D** = Drain
- EI** = Electrical connection
- G** = Gas connection

Side

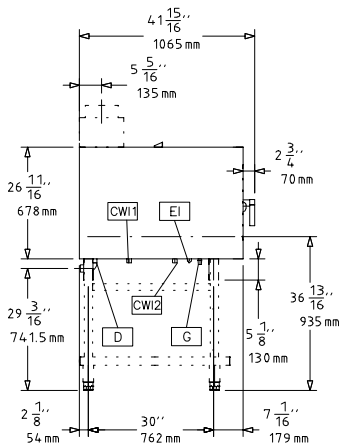

Electric

Supply voltage:

266751(AOS062GKP1) 120 V/1 ph/60 Hz

Amps:

7.5

Circuit breaker required

Gas

Gas Power: 78407 Btu/hr (23 kW)

ISO 7/1 gas connection diameter: 1/2" MNPT

Natural gas:

Total thermal load: 78407 BTU (23 kW)

LPG:

Total thermal load: 78407 BTU (23 kW)

Water:

Water inlet "CW" connection: 3/4"

Total hardness: 5-50 ppm

Pressure: 22-65 psi (1.5-4.5 bar)

Drain "D": 1"1/4

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation:

Clearance: 2" (5cm) rear and right hand sides.

Suggested clearance for service access: 20" (50cm) left hand side.

Capacity:

Sheet pans: 6 - 18" x 26"

Steam pans: 12 - 12" x 20"

Half size sheet pans: 12 - 13" x 18"

Max load capacity: 106 lbs. (48 kg)

Key Information:

Net weight: 375 lbs (170 kg)

Shipping width: 46 7/8" (1190 mm)

Shipping depth: 50 13/16" (1290 mm)

Shipping height: 44 7/8" (1140 mm)

Shipping weight: 428 lbs (194 kg)

Shipping volume: 61.79 ft³ (1.75 m³)

air-o-convect Touchline
air-o-convect TOUCHLINE Boilerless Combi Oven 62 (gas)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2013.04.22