



Electrolux

air-o-convect air-o-convect Manual Boilerless Combi Oven 102 (gas)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

air-o-convect Manual Boilerless Combi Oven 102 (gas)



air-o-convect

air-o-convect Manual Boilerless Combi Oven 102 (gas)

269753 (AOS102GCP1)

air-o-convect Boilerless Combi Oven 102
120V/1ph/60Hz

Short Form Specification

Item No.

Unit to be Electrolux air-o-convect Boilerless Combi Oven (electric).

air-o-convect performs all of the functions of a convection oven and has a boilerless steaming capabilities to add and retain moisture for high quality, consistent cooking cycles. Cooking modes include a convection (hot air) cycle 77 °F-572 °F (25°C-300°C) with an automatic moisture control function with 11 settings from zero to high moisture, double step cooking process, automatic pre-heating, a hold function and automatic rapid cooling. All 304 stainless steel construction, seamless hygienic cooking chamber with all rounded corners. Double thermo-glazed door with open frame construction for cool outside door panel. IPX5 (NEMA 4) spray water protection certification.

air-o-clean™ automatic and built-in self cleaning system.

Covered by Electrolux Platinum Star® Service Program, two-year parts and one-year labor warranty, installation start-up and performance checkup after one year from installation.

Main Features

- Dry hot convection cycle 77 °F-572 °F (25°C to 300°C) ideal for low humidity baking.
- Automatic moistener (11 settings) for boilerless steam generation.
 - 0 = no additional moisture (air frying, dehydrating, baking, browning)
 - 1-2 = low moisture (roasting, grilling, searing, baking, cookies, cakes, grill cheese)
 - 3-4 = medium low moisture (au gratin vegetables, roasted meat and fish)
 - 5-6 = medium moisture (roasting small portions poultry, meet and fish, casserole, pizza)
 - 7-8 = medium-high moisture (Roasting and backing, large portions of meat, whole: chicken, turkey, ham)
 - 9-10 = high moisture (proofing, low temperature steaming, steam vegetables, rice, pasta, fish, shell fish, bagged product, sous vide, re-thermalization, baking)
- Double step cooking (first phase with moisture, second phase dry for browning).
- Core temperature probe.
- Variable fan speed (radial fan): full speed or pulse ventilation (Hold) for baking and slow cooking.
- Hold function for keeping food warm at the end of a cycle.
- Exhaust valve electronically controlled to extract excess humidity.
- Automatic and manual rapid cooling activation when going from a higher to a lower temperature.
- air-o-clean™ automatic and built-in self cleaning system (4 automatic and 1 semi-automatic cycles).
- Gas burner is certified by Gastec for high efficiency and low emissions.
- Electrolux Platinum Star® Service package included:
 - 2-year parts, 1-year labor warranty.
 - Start-up installation check.
 - Equipment check-up after 12 months from installation.
- IPX5 – Water Jets protected (Water projected by a nozzle (6.3 mm) against enclosure from any direction shall have no harmful effects.).
- ETL safety approved, complies with UL 197 and CSA 22.2 listings.
- ETL sanitation approved, complies with NSF/ANSI 2 listing.

Construction

- All 304 stainless steel construction.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.

*Electrolux recommends a certified service agent perform equipment install and start-up, and an Electrolux certified chef be hired to train kitchen staff on equipment operation and maintenance.



APPROVAL: _____

Electrolux Professional, Inc.

www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401



Electrolux

air-o-convect air-o-convect Manual Boilerless Combi Oven 102 (gas)

Included Accessories

- 5 of Single 304 stainless steel full-size grid (21"x26") PNC 922076

Optional Accessories


- Wheel kit for base for 61, 62, 101 and 102 oven bases PNC 922003
- Chicken Racks, pair (2) (fits 8 chickens per rack) PNC 922036
- Tray support, for 62 and 102 oven bases PNC 922041
- Trolley, for roll-in rack for 62 and 102 oven PNC 922042
- Tray rack and wheels for 102 oven (standard pitch) PNC 922043
- Tray rack and wheels, for 102 oven (increased pitch) PNC 922045
- Slide-in rack support with handle for 62 and 102 oven PNC 922047
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 3/4" (20 mm) deep PNC 922090
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 1 1/2" (40 mm) deep PNC 922091
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 2 1/2" (65 mm) deep PNC 922092
- Fat filter for 101 and 102 oven PNC 922178
- Open base with rack guides for 62 and 102 oven PNC 922198
- Cupboard base and tray support for 62 and 102 oven PNC 922234
- Control Panel filter for 62 and 102 oven PNC 922247
- Heat shield for 102 oven PNC 922252
- Double-click closing catch for oven door PNC 922265
- Stacking kit: 62 on top of 62 or 102 Gas oven PNC 922268




Electrolux

air-o-convect air-o-convect Manual Boilerless Combi Oven 102 (gas)

Front

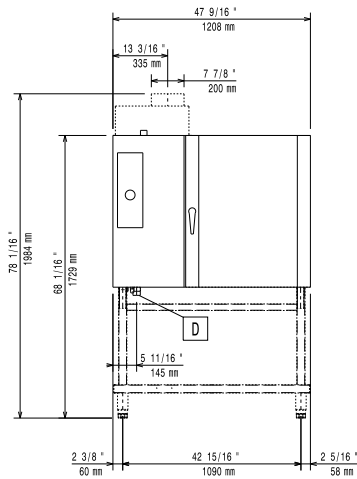


Top

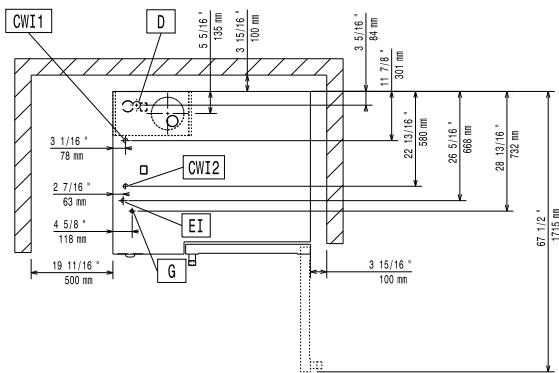

- CWI = Cold Water inlet
- D = Drain
- EI = Electrical connection
- G = Gas connection

Side

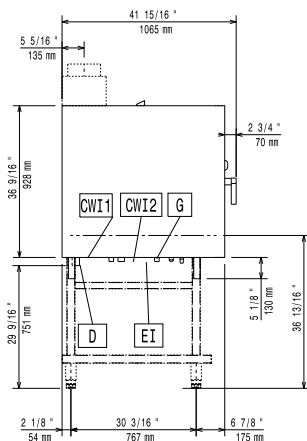

Electric

Supply voltage:
269753(AOS102GCP1) 120 V/1 ph/60 Hz

Amps: 8.3

Circuit breaker required

Gas

ISO 7/1 gas connection diameter: 1/2" MNPT

Natural gas:

Heating elements: 102270 BTU (30 kW)

Total thermal load: 105679 BTU (31 kW)

Natural gas - Pressure: 7" w.c. (17.4 mbar)

LPG:

Heating elements: 102270 BTU (30 kW)

Total thermal load: 105679 BTU (31 kW)

Pressure: 11" w.c. (27.4 mbar)

Water:

Water inlet "CW" connection: 3/4"

Water consumption (gal./hr.): Min: 0.09 Max: 2.77

Total hardness: 5-50 ppm

Pressure: 1.5-4.5 bar

Drain "D": 1"1/4"

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation:

Clearance: 2" (5 cm) rear and right hand sides

Suggested clearance for service access: 20" (50 cm) left hand side

Capacity:

Sheet pans: 10 - 18" x 26"

Steam pans: 20 - 12" x 20"

Half size sheet pans: 20 - 13" x 18"

Max load capacity: 180 lbs. (80 kg)

Key Information:

Net weight: 443 lbs (201 kg)

Shipping width: 50 13/16" (1290 mm)

Shipping depth: 45 11/16" (1160 mm)

Shipping height: 52 3/8" (1330 mm)

Shipping weight: 514 lbs (233 kg)

Shipping volume: 70.28 ft³ (1.99 m³)

air-o-convect
air-o-convect Manual Boilerless Combi Oven 102 (gas)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2013.04.22