

Electrolux

Pasta Solutions 2-Basket Automatic Pasta Cooker

ITEM # _____

MODEL # _____

PROJECT NAME # _____

SIS # _____

AIA # _____



Pasta Solutions 2-Basket Automatic Pasta Cooker

371174 (E7PCED1KF1) 2-Basket Automatic Pasta Cooker
208 V/3p/60Hz – 24A

Short Form Specification

Item No. _____

Unit to be Electrolux 2-Basket Automatic Pasta Cooker 371174. The unit is a free-standing, 2-basket and automatic Pasta Cooker. Each basket is to be independently programmable and cooking times are microprocessor controlled. The water temperature is to be thermostat controlled and programmable. The unit shall feature constant water level and starch removal during cooking process. IPX 4 splash water protection (NEMA 4 equivalent). Two stainless steel baskets included. The 5.3 gallon tank is pressed in AISI 316 stainless steel and features only rounded corners. The unit to be completely in AISI 304 stainless steel.

Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.

Main features

- Rapid system function only with lower water consumption (0.8 l/ min, 2 bar).
- Fully electronic control panel.
- 2-baskets: independently controlled by push-buttons.
- Microprocessor controlled programmable cooking time for each basket.
- 5.3 gallon tank.
- Thermostat controlled programmable water temperature: for cooking, re-therming and sous-vides applications.
- 9-position energy regulator.
- 3-position water fill regulator.
- Constant water level.
- Automatic starch removal function during cooking: improved water quality over time.
- Automatic low-water level shut-off: no accidental over-heating.
- Electrolux Platinum Star® Service package included:
 - 2-year parts, 1-year labor warranty, 5-year compressor warranty.
 - Start-up install check.
 - Equipment check-up after 12 month from installation.

Construction

- Pressed 5.3 gal tank: only rounded corners for improved cleanability.
- AISI 316 stainless steel tank: maximum corrosion resistance.
- All stainless steel construction.
- IPX 4 splash water protection (NEMA 4 equivalent).
- 5", height adjustable legs.

Included Accessories

- 2 of AISI 304 stainless steel baskets.
- Pair of single portion baskets PNC 206312
- Door for open cupboard PNC 206350

Optional Accessories

- Bulk cooking basket.
- 2 of 1/2 size bulk cooking baskets.
- 3 of 1/3 size bulk cooking baskets.
- 3 of round individual-portion baskets.
- False bottom for round individual-portion baskets.
- Castors.



Approval: _____

Electrolux Professional, Inc.


www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401


Electrolux

Pasta Solutions
2-Basket Automatic Pasta Cooker


Front View

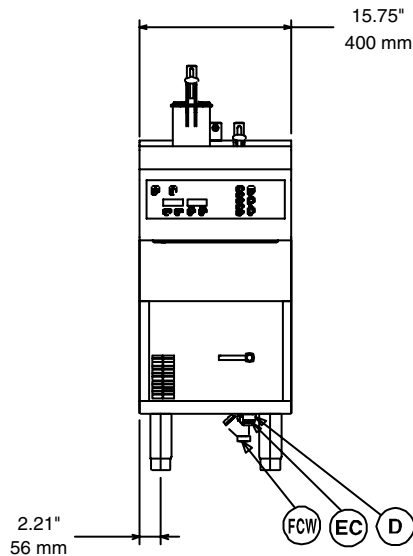

Top View

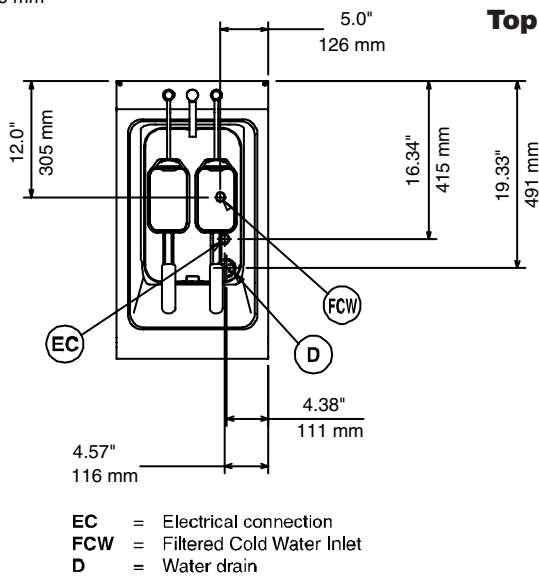

Side View

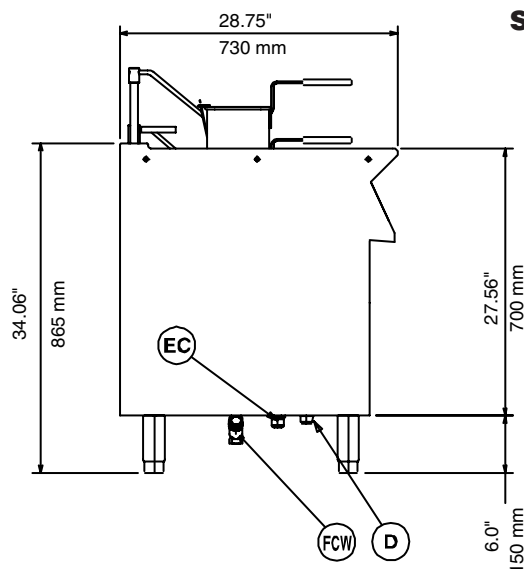

Electric

Supply voltage:	1371174 (E7PCED1KF1)	208 V/3p/60Hz - 24A
Connected load:		8.6 kW
Horsepower:		11.5 hp
Circuit breaker required		

Water

Water inlet "CW" – 1/2" connection:

Total hardness: 5-50 ppm

Drain "D" 1" connection

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation

Clearance: 4" (10 cm) from back.

Capacity

Max.:	5.3 gal
Min.:	4.2 gal

Key Information

Net weight:	121 lbs. (55 kg)
Height, inch/mm:	33-7/16" (849 mm)
Width, inch/mm:	15-3/4" (400 mm)
Depth, inch/mm:	28-3/4" (730 mm)
Shipping weight:	143 lbs. (65 kg)
Shipping width:	18-1/8" (460 mm)
Shipping height:	46-7/16" (1180 mm)
Shipping depth:	32-1/4" (820 mm)
Shipping volume:	15.9 cu. ft. (0.45 m ³)