



Modular Cooking Range Line S90 Heavy Duty One Well Electric Deep Fat Fryer, C-Board

ITEM # _____
MODEL # _____
PROJECT NAME # _____
SIS # _____
AIA # _____



Modular Cooking Range Line S90 Heavy Duty One Well Electric Deep Fat Fryer, C-Board

584093 (WFWROFOOOC) S90 One 6 Gal Well Electric
Deep Fat Fryer, C-Board,
1 Side Operation – 208 V

Short Form Specification

Item No. _____

Unit to be Electrolux S90 Heavy Duty One 6 gal well Electric Deep Fat Fryer. Electric characteristics to be ____208 V three phase. Unit to have deep drawn v-shaped well with expansion zone located at top of the well. Oil cleaning device shall be located below the well. Unit to have raised rear c-board for against the wall or back to back unit installation. Body and base of unit entirely in 304 type stainless steel. Unit shall have heavy duty 304 type stainless steel internal frame with reinforcement on the top of 0.118" (3 mm). Extra strength worktop in heavy duty 0.118" (3 mm) stainless steel. "Lasertec" connection system permits units to be connected to each other creating a seamless worktop.

Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.

Main features

- Deep drawn v-shaped well.
- Interior of well with rounded corners for easy of cleaning.
- External heating elements for ease of cleaning of internal well.
- Expansion zone located on top of the well.
- Thermostatic regulation of oil temperature up to a maximum of 365 °F (185 °C).
- Overheat protection as standard on all units.
- Oil cleaning device located in compartment below the well.
- All major compartments located in front of unit for ease of maintenance.
- Heavy duty internal frame 304 type stainless steel with reinforcement on top of 0.118" (3 mm).
- 0.118" (3 mm) top in 305 type stainless steel.
- "Lasertec connection system" creates seamless worktop when units are connected to each other.
- Raised rear c-board permits unit to be connected up against the wall for better hygiene.
- Unit delivered with four 7-7/8" (200 mm) legs as standard (all round stainless steel kick plates as option).
- Supplied as standard with 2 baskets with insulated handles.

Accessories

- Basket rest grid for 6 gal. well fryer.
- 2 baskets for 6 gal. fryer.
- Closing cover for 6 gal. fryer.

Optional Accessories

- Left side stainless steel 0.118" (3 mm) panel
- Right side stainless steel 0.118" (3 mm) panel
- 5" (130 mm) portioning shelf
- 7.8" (200 mm) portioning shelf
- All round stainless steel kick plates
- Basket rest grid for 6 gal. well fryer (included)
- Discharge vessel for 6 gal. fryer
- Lid for discharge vessel for 6 gal. fryer
- Extra basket for 6 gal. fryer (two included)
- Closing cover for 6 gal. fryer (included)
- Oil strainer for fryer
- Sediment tray for fryers



Approval: _____

Electrolux Professional, Inc.
www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401



Electrolux


S90 Heavy Duty One Well Electric Deep Fat Fryer, C-Board

Modular Cooking Range Line




Modular Cooking Range Line S90 Heavy Duty One Well Electric Deep Fat Fryer, C-Board

Front View

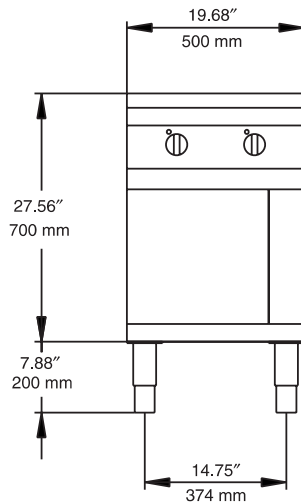


Top View

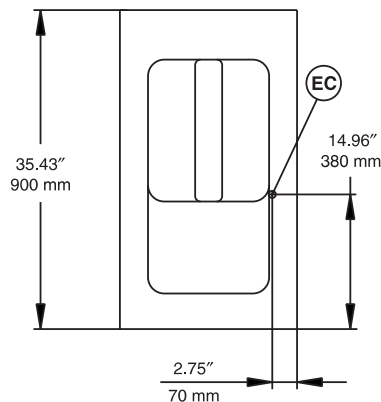

EC = Electrical connection

Side View

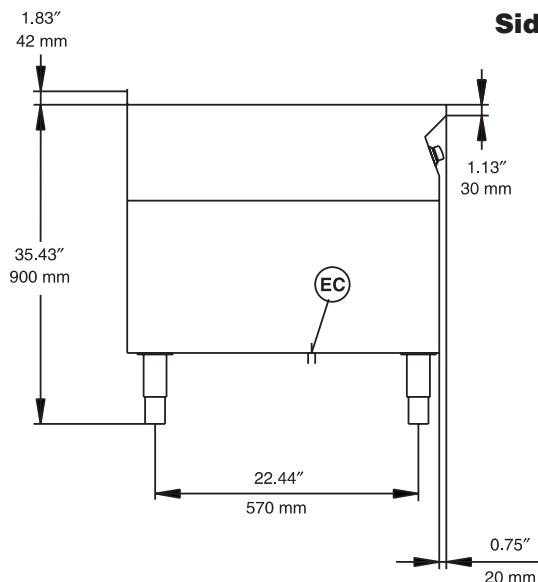

Electric

Supply voltage:

584093 (WFWR0F000C) 208 V/3p/60Hz - 40A

Total Watts:

584093 (WFWR0F000C) 12.2 kW

Key Information

Usable well dimensions

(width): 13-3/8" (340 mm)

Usable well dimensions

(height): 22-5/8" (575 mm)

Usable well dimensions

(depth): 15-3/4" (400 mm)

Well capacity:

5.55 gal (21 liters) MIN

6.08 gal (23 liters) MAX

Thermostat Range:

221 °F (105 °C) MIN

365 °F (185 °C) MIN

Net weight:

198 lb (90 kg)

Shipping weight:

243 lb (110 kg)

Shipping width:

27-9/16" (700 mm)

Shipping height:

43-5/16" (1100 mm)

Shipping depth:

43-5/16" (1100 mm)

Shipping volume:

30.01 cu.ft (0.85 m³)

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap off approximately 6" (150 mm) should be maintained or some form of heat insulation fitted.

Modular Cooking Range Line
S90 Heavy Duty One Well Electric Deep Fryer, C-Board

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

12-18-10