

Electrolux

Modular Cooking Range Line S90 Heavy Duty Two Well Electric Deep Fat Fryer, C-Board

ITEM # _____

MODEL # _____

PROJECT NAME # _____

SIS # _____

AIA # _____



Modular Cooking Range Line S90 Heavy Duty Two Well Electric Deep Fat Fryer, C-Board

584097 (WFWROFOOOC) S90 Two 3.6 Gal Wells Electric
Deep Fat Fryer, CB,
1 Side Operation – 208 V

Short Form Specification

Item No. _____

Unit to be Electrolux S90 Heavy Duty Two 3.6 gal wells Electric Deep Fat Fryer. Electric characteristics to be _____ 208 V three phase. Unit to have deep drawn v-shaped well with expansion zone located at top of the well. Oil cleaning device shall be located below the well. Unit to have raised rear c-board for against the wall or back to back unit installation. Body and base of unit entirely in 304 type stainless steel. Unit shall have heavy duty 304 type stainless steel internal frame with reinforcement on the top of 0.118" (3 mm). Extra strength worktop in heavy duty 0.118" (3 mm) stainless steel. "Lasertec" connection system permits units to be connected to each other creating a seamless worktop.

Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.



Approval: _____

Main features

- Deep drawn v-shaped well.
- Interior of well with rounded corners for easy of cleaning.
- External heating elements for ease of cleaning of internal well.
- Expansion zone located on top of the well.
- Thermostatic regulation of oil temperature up to a maximum of 365 °F (185 °C)
- Overheat protection as standard on all units.
- Oil cleaning device located in compartment below the well.
- All major compartments located in front of unit for ease of maintenance.
- Heavy duty internal frame 304 type stainless steel with reinforcement on top of 0.118" (3 mm).
- 0.118" (3 mm) top in 305 type stainless steel.
- "Lasertec connection system" creates seamless worktop when units are connected to each other.
- Raised rear c-board permits unit to be connected up against the wall for better hygiene.
- Unit delivered with four 7-7/8" (200 mm) legs as standard (all round stainless steel plinth as option).
- Supplied as standard with 2 baskets with insulated handles.

Accessories

- 2 basket rest grid for 2 x 3.6 gal. well fryer
- 2 baskets for 3.6 gal. fryer
- 2 closing covers for 3.6 gal. fryer

Optional Accessories

- Set of 4 castors (2 with brakes)
- Left side stainless steel 0.118" (3 mm) panel
- Right side stainless steel 0.118" (3 mm) panel
- 5" (130 mm) portioning shelf
- 7.8" (200 mm) portioning shelf
- All round stainless steel plinth.
- Basket rest grid for 3.6 gal well fryer (included)
- Discharge vessel for 3.6 gal fryer
- Lid for discharge vessel for 3.6 gal fryer
- Extra basket for 3.6 gal fryer (two included)
- Closing cover for 3.6 gal fryer (included)
- Oil strainer for fryer
- Sediment tray for fryers

Electrolux Professional, Inc.

www.electroluxusa.com/professional


10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401




Electrolux

Modular Cooking Range Line
S90 Heavy Duty Two Well Electric Deep Fat Fryer, C-Board

Front View

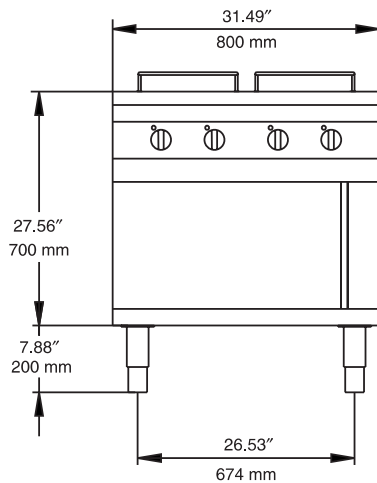


Top View

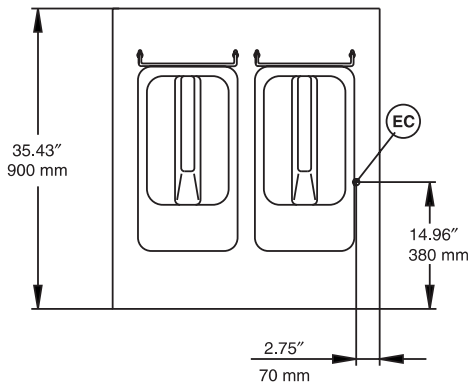

EC = Electrical connection

Side View

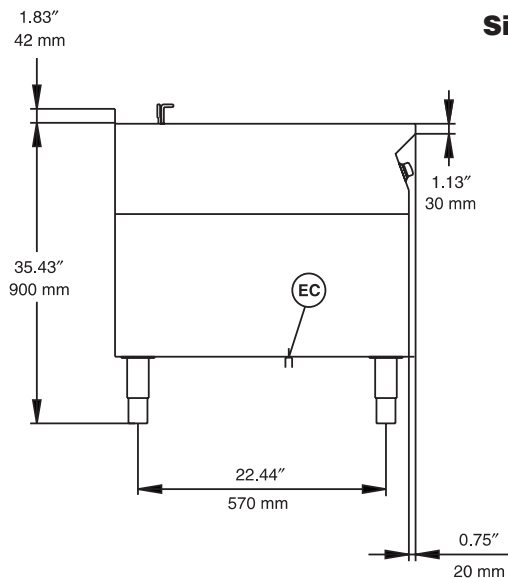

Electric

Supply voltage:

584097 (WFWROF000C) 208 V/3p/60Hz - 53.4A

Total Watts:

584097 (WFWROF000C) 18.4 kW

Key Information

Number of wells:	2
Capacity of each well:	3.6 gal (14 liters)
Usable well dimensions (width):	9-7/16" (240 mm)
Usable well dimensions (height):	19-7/8" (505 mm)
Usable well dimensions (depth):	14-15/16" (380 mm)
Thermostat Range:	221 °F (105 °C) MIN 365 °F (185 °C) MIN
Net weight:	267 lb (121 kg)
Shipping weight:	309 lb (140 kg)
Shipping width:	39-3/8" (1000 mm)
Shipping height:	43-5/16" (1100 mm)
Shipping depth:	43-5/16" (1100 mm)
Shipping volume:	42.73 cu.ft (1.21 m ³)

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap off approximately 6" (150 mm) should be maintained or some form of heat insulation fitted.