

# Electrolux

## Modular Cooking Range Line S90 Electric Solid Top on Electric Oven, C-Board, 1 Side

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

PROJECT NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



### Modular Cooking Range Line S90 Electric Solid Top on Electric Oven, C-Board, 1 Side

584148 (WLWWCFOOOC) S90 Electric Solid Top,  
Electric Oven, C-Board,  
1 Side Operation – 208 V

### Short Form Specification

Item No. \_\_\_\_\_

Unit to be Electrolux S90 Heavy Duty Electric Solid Top on Electric Oven. Electric characteristics to be \_\_\_\_\_ 208 V three phase. Unit to have raised rear c-board for against the wall or back to back unit installation. Unit shall have joint free large cooking surface with 4 heating areas with individual temperature settings for each zone from as low as 212 °F (100 °C) to as high as 842 °F (450 °C). Large flat cooking surface made of mild steel permits the use of a number of various sized pots and pans, all easily moved across the surface without lifting. Body and open base of unit entirely in 304 stainless steel. Unit shall have heavy duty 304 stainless steel internal frame. Extra strength worktop in heavy duty 0.118" (3 mm) stainless steel. "Lasertec" connection system permits units to be connected to each other creating a seamless worktop.

Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.



Approval: \_\_\_\_\_

### Main features

- 4 high powered heating electric zones.
- Solid top made of mild steel, smooth pore-free and easy to clean.
- 4 heating zones independently controlled.
- Surface temperature can be regulated with two power levels up to 842 °F (450 °C) for a very high degree of accuracy.
- Joint free large cooking surface.
- Rapid heat up of the plate and continuously ready for use.
- Setting different temperature zones provides a temperature gradient over the plate for different cooking needs.
- Various sizes of pans can be used at the same time due to large surface area with no intermediate sectors.
- Pans can easily be moved from one area to another without lifting.
- Base compartment consists of an electric heated standard oven for base heat. Ovens equipped with one stainless steel grid and one enameled baking tray.
- Oven temperature up to 644 °F (340 °C).
- Thick steel base plate in the oven for an even temperature distribution and storage.
- Heavy duty internal frame in 304 type stainless steel.
- Control parts are protected against water and heat.
- All major components can be accessed from the front for ease of maintenance.
- "Lasertec connection system" creates seamless work top when units are connected to each other.
- Raised rear c-board permits unit to be connected up against the wall for better hygiene.
- Unit delivered with four 7-7/8" (200 mm) legs as standard (all round stainless steel kick plates as option).

### Optional Accessories

- Set of 4 castors (2 with brakes)
- Left side stainless steel 0.118" (3 mm) panel
- Right side stainless steel 0.118" (3 mm) panel
- 5" (130 mm) portioning shelf
- 7.8" (200 mm) portioning shelf
- All round stainless steel kick plates
- Polinox steel wool for solid top cleaning



# Electrolux


S90 Electric Solid Top on Electric Oven, C-Board, 1 Side  
Modular Cooking Range Line

Electrolux Professional, Inc.


[www.electroluxusa.com/professional](http://www.electroluxusa.com/professional)

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401

**Front View**

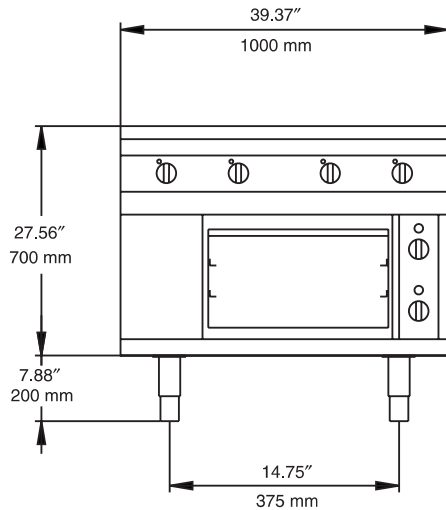


**Top View**

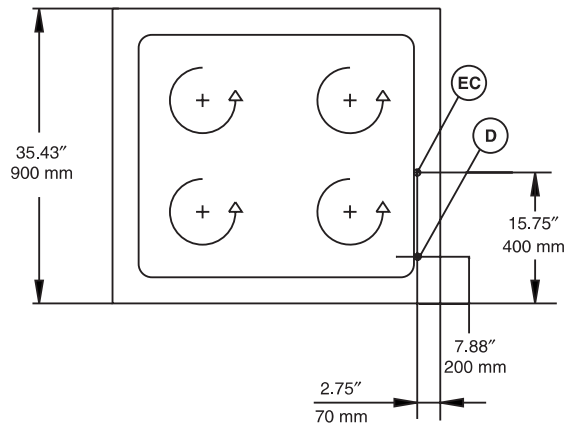

**EC** = Electrical connection  
**D** = Water drain

**Side View**

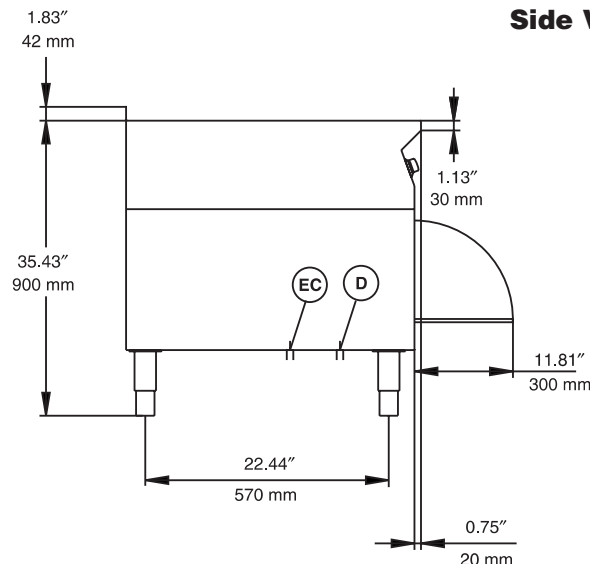

### Electric

Supply voltage:

584148 (WLWWCF000C) 208 V/3p/60Hz - 51.7A

Total Watts:

584148 (WLWWCF000C) 17.8 kW

### Drain

Drain Line Size: 1" ID

Drain only for draining of dirty water used for cleaning top burners spillage area.

### Key Information

**Solid top usable surface (width):** 30" (840 mm)

**Solid top usable surface (depth):** 29" (740 mm)

**Solid top working temperature:** 212 °F (100 °C) MIN

**Solid top working temperature:** 842 °F (450 °C) MAX

**Oven working Temperature:** 212 °F (100 °C) MIN  
644 °F (340 °C) MAX

**Oven Cavity Dimensions (width):** 21-5/8" (550 mm)

**Oven Cavity Dimensions (height):** 10-5/8" (270 mm)

**Oven Cavity Dimensions (depth):** 27-9/16" (760 mm)

**Net weight:** 485 lb (220 kg)

**Shipping weight:** 529 lb (240 kg)

**Shipping width:** 47-1/4" (1200 mm)

**Shipping height:** 43-5/16" (1100 mm)

**Shipping depth:** 43-5/16" (1100 mm)

**Shipping volume:** 51.2 cu.ft (1.45 m<sup>3</sup>)

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap off approximately 6" (150 mm) should be maintained or some form of heat insulation fitted.