



foodservice  
products



ELKAY – BLUBAR COUNTERTOP – DSBCF180K



**MODEL: DSBCF180K  
BLUBAR COUNTERTOP**

**STANDARD FEATURES**

- Dispenses chilled sparkling water and chilled still water
- Stainless steel mechanical taps
- Front panel in backlit Plexiglas for stylish appeal
- Internal ice bank & adjustable thermostats
- Easy access for complete service and maintenance
- Water pressure and CO<sub>2</sub> regulator
- Elkay WaterSentry® Filter included - Carbon Activated designed to reduce Aesthetic Chlorine, Taste and Odor
- Installation kit included

**ACCESSORIES**

Replacement Water Filter: Elkay WaterSentry® Filter WSF6000R-2PK (includes 2 water filters)

**SPECIFICATIONS**

• Model Type	Countertop
• Materials	Stainless steel cabinet
• Cold Water Temperature Range	37°F - 50°F
• Cooling Capacity	20 gallons/hour (80 liters/hour)
• Cooling Technology	Dual stainless steel coils
• Refrigerant Gas	R134a
• Condensation Control	Forced ventilation (fan)
• Inlet Water Line	3/8 inch, PE plastic tubing
• Electrical	115 V - 60 Hz 1 ph.
• Power Consumption	330 W – 3.2 A
• Working Room Temperature	Min 41°F - Max 107°F
• Filter Capacity	6000 gallons or 6 months

**PRODUCT COMPLIANCE**

UL standard for safety of drinking water coolers ANSI/UL399

CSA standard for refrigeration equipment, CSA C22.2 No. 120

NSF Standard 42 for Aesthetic Chlorine, Taste and Odor and Particulate Class 1 (Filter)

Item No: _____	Qty. _____
Model No: _____	
Project No: _____	

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.*

*This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*



Elkay  
2222 Camden Court  
Oak Brook, IL 60523  
Phone: 800-726-0553


elkay.com  
© 2015 Elkay Manufacturing Company



foodservice  
products



**MODEL: DSBCF180K  
BLUBAR COUNTERTOP**

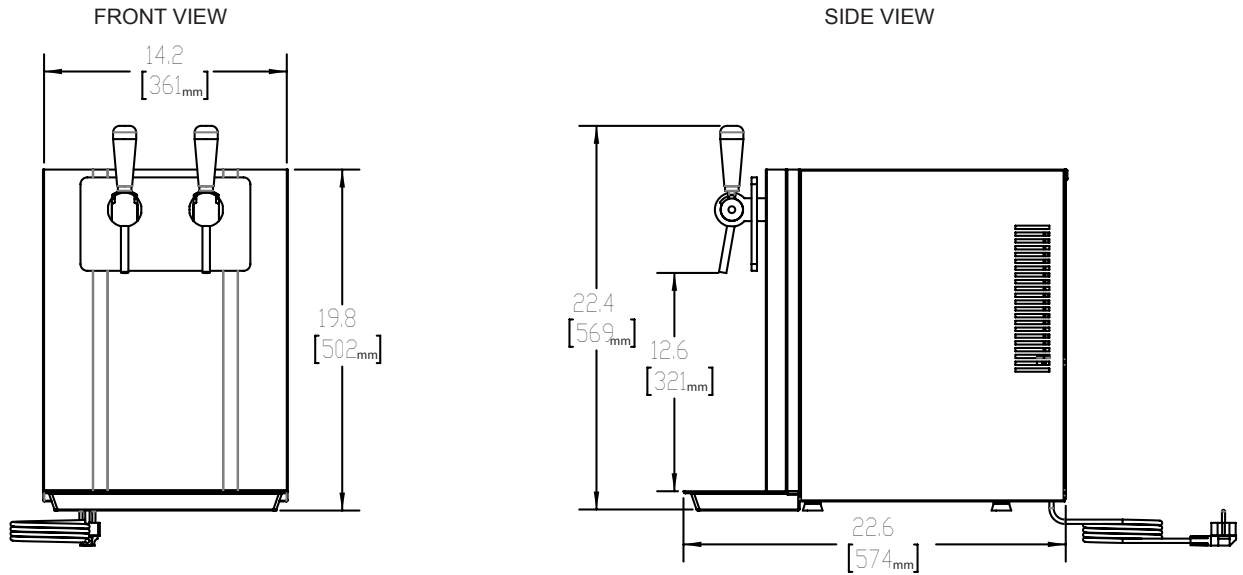

**ELECTRICAL:** 115 V -60 Hz. 1 Ph., 330 W – 3.2A, NEMA 5-15 Plug  
**WATER SUPPLY:** 3/8 in. supply recommended, 14.5 PSI min, 51 PSI max. (125 PSI max with use of supplied regulator)  
**INSTALLATION:** Provide 4 in. of clearance around unit to allow adequate ventilation  
**REQUIRES:** CO<sub>2</sub> tank with standard threaded connection to CGA 320 nut, **CO<sub>2</sub> TANK IS NOT INCLUDED**

<u>DIMENSIONS</u>	<u>Unit</u>	<u>Shipping</u>
Height	22.4 (in.)	24.8 (in.)
Width	14.2 (in.)	18.1 (in.)
Depth	22.6 (in.)	26.0 (in.)
Weight	77 (lbs.)	84 (lbs.)

**INSTALLATION KIT (INCLUDED)**

- Installation and operating instructions
- CO<sub>2</sub> Regulator
- Water Pressure Regulator
- Elkay WaterSentry® Filter and Mounting Bracket
- Additional tubing for connection to water and CO<sub>2</sub>
- Required fittings, including 3/8 push to connect or 3/8 tube connection to water supply
- Shut-off Valve

Item No: _____	Qty. _____
Model No: _____	
Project No: _____	

Elkay  
 2222 Camden Court  
 Oak Brook, IL 60523  
 Phone: 800-726-0553

elkay.com  
 © 2015 Elkay Manufacturing Company