



foodservice
products



ELKAY – FONTEMAGNA COMPACT – DSFCF180UVK



**MODEL: DSFCF180UVK
FONTEMAGNA COMPACT**

STANDARD FEATURES

- Three (3) Dispensers: chilled sparkling water, chilled still water, and ambient still water
- Customizable portion control system, preset at 34 oz. and 7 oz.
- Electronic touch pad controls
- CO₂ & H₂O display alarms
- UV Purification system prevents growth of bacteria
- Internal ice bank & adjustable thermostat
- Energy saving mode reduces energy consumption by up to 75%
- Water pressure and CO₂ regulator
- Elkay WaterSentry® Filter included - Carbon Activated designed to reduce Aesthetic Chlorine, Taste and Odor
- Installation kit included

ACCESSORIES

Replacement Water Filter: Elkay WaterSentry® Filter WSF6000R-2PK (includes 2 water filters)

SPECIFICATIONS

• Model Type	Countertop
• Materials	Stainless steel & aluminum
• Cold Water Temperature Range	37°F - 50°F
• Cooling Capacity	20 gallons/hour (80 liters/hour)
• Cooling Technology	Dual stainless steel coils
• Refrigerant Gas	R134a
• Condensation Control	Forced ventilation (fan)
• Inlet Water Line	3/8 inch, PE plastic tubing
• Electrical	115 V - 60 Hz 1 ph.
• Power Consumption	330 W – 3.2 A
• Working Room Temperature	Min 41°F - Max 107°F
• Filter Capacity	6000 gallons or 6 months

PRODUCT COMPLIANCE

UL standard for safety of drinking water coolers ANSI/UL399

CSA standard for refrigeration equipment, CSA C22.2 No. 120

NSF Standard 42 for Aesthetic Chlorine, Taste and Odor and Particulate Class 1 (Filter)

Item No: _____	Qty. _____
Model No: _____	
Project No: _____	

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Elkay
2222 Camden Court
Oak Brook, IL 60523
Phone: 800-726-0553



elkay.com
© 2015 Elkay Manufacturing Company



foodservice
products



**MODEL: DSFCF180UVK
FONTEMAGNA COMPACT**

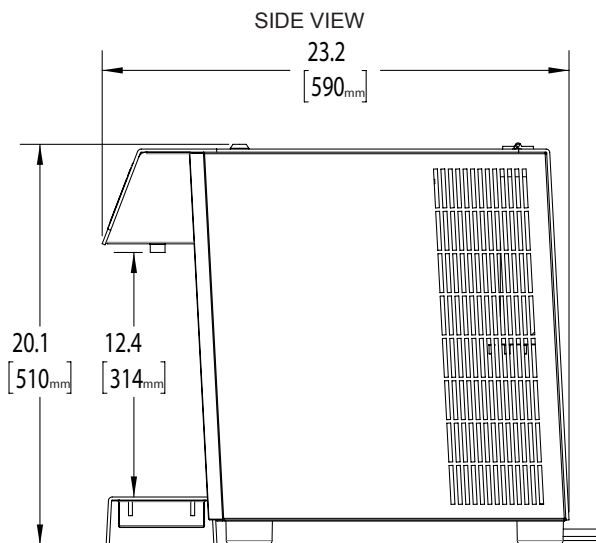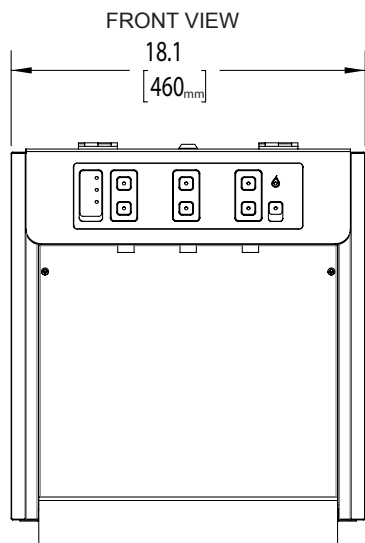

ELECTRICAL: 115 V -60 Hz. 1 Ph., 330 W – 3.2A, NEMA 5-15 Plug
 WATER SUPPLY: 3/8 in. supply recommended, 14.5 PSI min, 51 PSI max. (125 PSI max with use of supplied regulator)
 INSTALLATION: Provide 4 in. of clearance around unit to allow adequate ventilation
REQUIRES: CO₂ tank with standard threaded connection to CGA 320 nut, CO₂ TANK IS NOT INCLUDED

DIMENSIONS	Unit	Shipping
Height	20.1 (in.)	27.6 (in.)
Width	18.1 (in.)	21.2 (in.)
Depth	23.2 (in.)	26.8 (in.)
Weight	88 (lbs.)	110 (lbs.)

INSTALLATION KIT (INCLUDED)

- Installation and operating instructions
- CO₂ Regulator
- Water Pressure Regulator
- Elkay WaterSentry® Filter and Mounting Bracket
- Additional tubing for connection to water and CO₂
- Required fittings, including 3/8 push to connect or 3/8 tube connection to water supply
- Shut-off Valve

Item No: _____ Qty. _____
 Model No: _____
 Project No: _____

Elkay
 2222 Camden Court
 Oak Brook, IL 60523
 Phone: 800-726-0553

elkay.com
 © 2015 Elkay Manufacturing Company