



General

- 26" (660 mm) W x 34" (864 mm) H x 30" (762 mm) D
- All stainless steel, type 304
- 14 or 16 one-gallon pouches capacity
- Electric heater with on/off switch
- UL accepted and listed, conforms to NSF standard 4 performance 2000
- Patent no. 5,706,718

Options

- Standard with legs
- Optional with 3" adjustable casters

SPECIFICATION SHEET

Clamshell Style - RTC-16-SL

- RTC-16-SL-CS*

Item No.: ______Qty. _

- _____
- Model No.: ____
- Project No: __

Rethermalizer

Available Models:

- Basket Style
- RTB-14-SL
- RTB-14-SL-CS*
- *Caster models

SPECIFICATIONS

Electrical

• 208V, 3 Phase, 9000W, 25.0 Amps, 30 Amp Circuit

Water/Drain

- Hot water hose bib behind unit
- 6' (1,829 mm) hose to connect to hot water included
- Faucet with back flush hose included
- Floor sink drain required

Controls

- Front digital thermometer display
- 6' (1,829 mm) 14/4 rubber cord, NEMA rated twist lock plug
- Set point range 100°-190°F





In keeping with our policy of continuing product improvement, Elkay SSP reserves the right to change product specifications without notice. This specification describes an Elkay SSP product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


Elkay SSP 421 N. Freya St. Spokane, WA 99205 Phone: 800-726-0553 Fax: 509-535-1493 Website: www.sspinc.net Email: sspsales@elkay.com ©2011 SSP INC.




Item No.:	Qty
Model No.:	
Project No:	



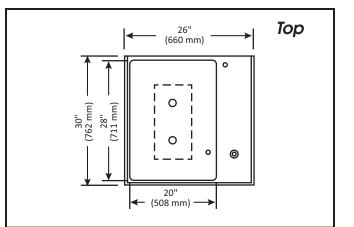

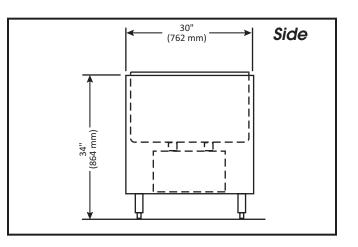

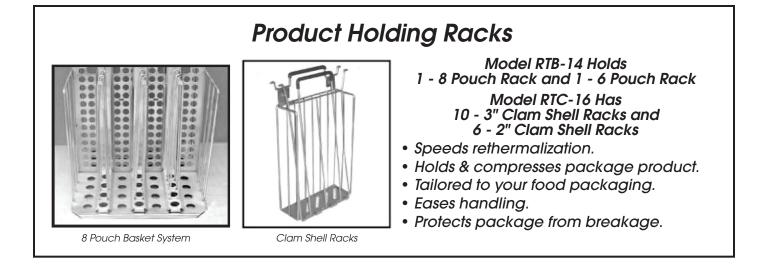

Elkay SSP 421 N. Freya St. Spokane, WA 99205 Phone: 800-726-0553 Fax: 509-535-1493 Website: www.sspinc.net Email: sspsales@elkay.com ©2011 SSP INC.