

**SIZE:**  
**26 3/8" W x 30 1/8" D x 57" H**  
**Cycle period: 1'-2'-3' minutes**  
**Capacity per hour:**  
**Baskets/H 60/30/20**  
**Dishes/H: 1080/540/360**  
**Dishes per basket 12±18**


- Electronic ass-through dishwasher;
- Stainless steel construction 18/10AISI 304;
- **Wash cycle time: 1'-2'-3' minutes;**
- **Endless cycle : max 15 minutes;**
- Linear/Corner version;
- Soft touch electronic control panel;
- Temperature's electronic display;
- Cycle start at hood closing;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- **Double skin self-washing slanted tank and hood with rounded edges;**
- Integral tank filter;
- Rinse aid dispenser;
- Detergent pump;
- Automatic tank loading;
- Hood opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;



# L25-s L25-dps


### Accessories:

- 2 baskets for dishes;
- 1 generic basket;
- 2 cutlery containers;



### OPTIONS

- Tank drain unit with filter (order DPS),
- Lateral entry/exit table with lower table 27,56 inch

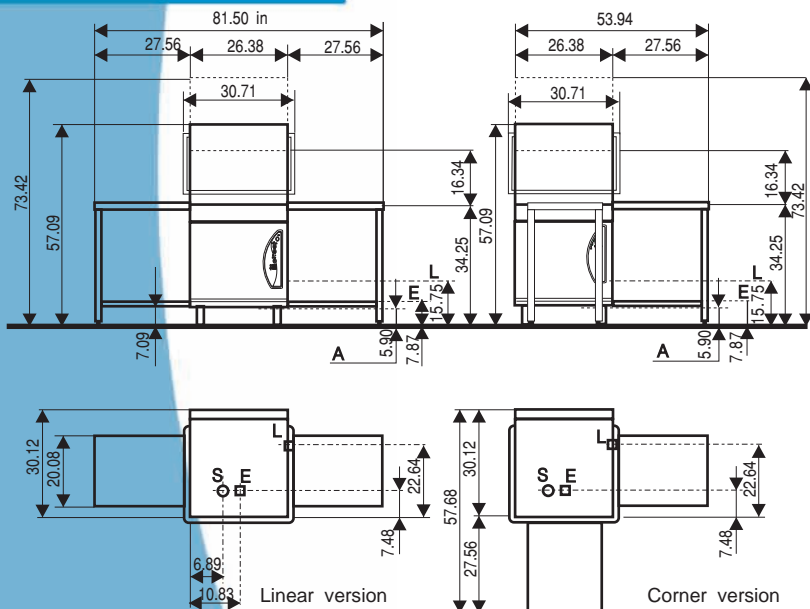

Specifications	L25-s/dps	
VOLTAGE	208 V3ph 60Hz	V
WASHING PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	6650	W
MAX CURRENT INTENSITY	34	A
PLATES CLEARANCE	16,34	inch
WORK HEIGHT	34,25	inch
TANK CAPACITY	9	Gal.
BOILER CAPACITY	2	Gal.
PUMP DELIVERY	145	Gal/min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	0,6	Gal.
WATER CONSUMPTION PER HOUR	15	Gal.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	TH(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	325	Lbs
GROSS WEIGHT	345	Lbs
PACKING SIZE	/ 29,92xL33,86xH56,30	inch
NOISE LEVEL	<60	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.