




P550-ek

- Ware washing-machine square basket 22,83' x 20,47'
- Complete stainless steel construction 18/10 AISI 304;
- Soft touch electronic control panel;
- Washing period cycle 120"-180"-240"sec.+ endless cycle;
- Digital thermometers;
- Counterbalanced double door;
- Lower and upper rotating wash arms in stainless stell;
- Lower and upper rotating rinse arms in stainless stell;
- 2 Integral tank filters;
- Self- washing slanted tank with rounded edges;
- Double skin with thermic and acoustic insulation;
- Stainless steel washing pump;
- Rinsing booster pump;;
- Automatic tank loading;
- Frontal control panel for easy maintenance;
- Security thermostat;

SIZE:
26,97 x 29,72x H70,28 inch
Cycle period 2'-3'-4' minutes
Baskets/H - casiers/H: 30÷20÷15

Accessoires:
 1 stainless steel basket
 20,47 X 22,83 mm

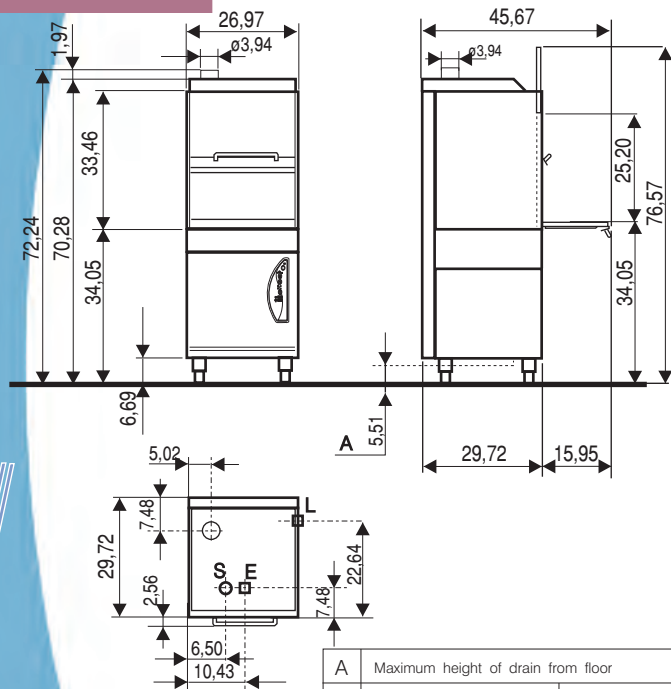

A	Maximum height of drain from floor	
E	Water inlet	3/4" G
L	Electric input	208/3ph~60Hz
S	Drain	32 mm - 1 1/4 G

Specifications	P550-ek	
VOLTAGE	208/3ph - 60 Hz	V
WASHING PUMP	1100	W
RINSING PUMP	385	W
WASH TANK ELEMENTS	3000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	7100	W
MAX CURRENT INTENSITY	12	A
PLATES CLEARANCE	25,20	inch
WORK HEIGHT	34,05	inch
TANK CAPACITY	34	Lt.
BOILER CAPACITY	8	Lt.
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	2,80	Lt.
WATER CONSUMPTION PER HOUR	84÷56÷42	Lt.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	Th(°f)
RINSING WATER TEMPERATURE	180 ÷ 195	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	150	Kg
GROSS WEIGHT	160	Kg
PACKING SIZE	/26,97xL29,72xH73	inch
NOISE LEVEL	<70	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.