




P700-ek

- Pot washing-machine square basket 25,20' x 26,38'
- Complete stainless steel construction 18/10 AISI 304;
- Soft touch electronic control panel;
- Washing period cycle 120"-180"-240"sec.+ endless cycle;
- Digital thermometers;
- Counterbalanced double door;
- Lower and upper rotating wash arms in stainless stell;
- Lower and upper rotating rinse arms in stainless stell;
- 2 Integral tank filters;
- Self- washing slanted tank with rounded edges;
- Double skin with thermic and acoustic insulation;
- Stainless steel washing pump;
- Rinsing booster pump;;
- Automatic tank loading;
- Frontal control panel for easy maintenance;
- Security thermostat;

SIZE:31,69 x 33,27x H72,24 inch
Cycle period 2'-3'-4' minutes
Baskets/H - casiers/H: 30÷20÷15

Accessoires:

- 1 stainless steel basket 25,20 X 26,38 mm
- 1 stainless steel baking-pan insert

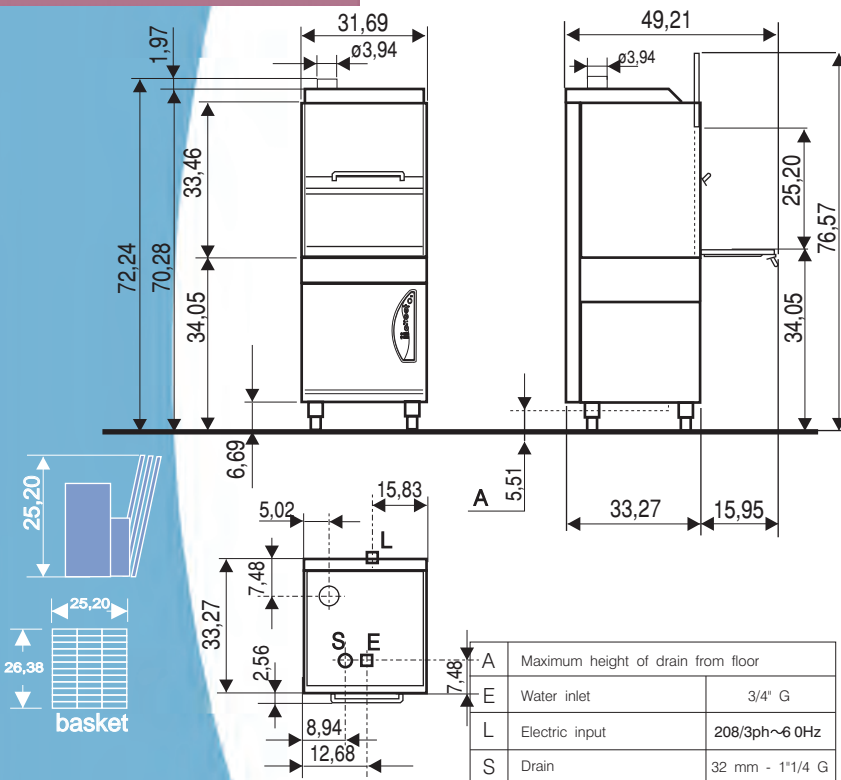

| Specifications | P700-ek | |
|-----------------------------|-------------------|--------|
| VOLTAGE | 208/3ph - 60 Hz | V |
| WASHING PUMP | 2200 | W |
| RINSING PUMP | 385 | W |
| WASH TANK ELEMENTS | 4500 | W |
| RINSE TANK ELEMENTS | 6000 | W |
| TOTAL RATING | 8200 | W |
| MAX CURRENT INTENSITY | 16 | A |
| PLATES CLEARANCE | 25,20 | inch |
| WORK HEIGHT | 34,05 | inch |
| TANK CAPACITY | 61 | Lt. |
| BOILER CAPACITY | 8 | Lt. |
| WATER CONNECTION | 131 | °F |
| WATER CONSUMPTION PER CYCLE | 2,80 | Lt. |
| WATER CONSUMPTION PER HOUR | 84÷56÷42 | Lt. |
| WATER PRESSURE | 20±5 | psi |
| WATER HARDNESS | 5 ÷ 10 | Th(°f) |
| RINSING WATER TEMPERATURE | 180 ÷ 195 | °F |
| WATER INLET | 3/4" | "G |
| WATER OUTLET | 1"1/4 | "G |
| NET WEIGHT | 160 | Kg |
| GROSS WEIGHT | 170 | Kg |
| PACKING SIZE | /35,04xL35,43xH73 | inch |
| NOISE LEVEL | <70 | dB(A) |

The manufacturer reserves the right to make modifications of materials and models without warning.