



- Electronic 16'x16' Square basket glasswasher;
- Stainless steel construction 18/10AISI 304;
- **Wash cycle time: 1'-2'-3' minutes;**
- Soft touch electronic control panel;
- Temperature's electronic display;
- **Double skin with thermic insulation;**
- Stainless steel lower rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- **Self-washing slanted pressed tank with rounded edges;**
- **Integral tank filter;**
- Pressed self-cleaning door;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Detergent pump,
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non-stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;

SIZE:
19" W x 20" D x 29 1/8" H

Cycle period: 1'-2'-3' minutes

Capacity per hour:
Baskets/H 60/30/20



S480-s S480-dps


Accessories:

- 2 baskets for glasses;
- 1 soucers insert
- 1 cutlery container;

OPTIONS

- Tank drain unit with filter,
- Stainless steel base H18,50 inch,

Specifications	S480-s/dps	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	210	W
WASH TANK ELEMENTS	1000	W
RINSE TANK ELEMENTS	3000	W
TOTAL RATING	3200	W
MAX CURRENT INTENSITY	16	A
PLATES CLEARANCE	11,81	inch
WORK HEIGHT	12,402	inch
TANK CAPACITY	2,3	Gal.
BOILER CAPACITY	0,8	Gal.
PUMP DELIVERY	42	Gal/min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	0,5	Gal.
WATER CONSUMPTION PER HOUR	16	Gal.
WATER PRESSURE	20±5	psi
WATER HARDNESS	5 ÷ 10	Th(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	"G
WATER OUTLET	1"1/4	"G
NET WEIGHT	106	Lbs
GROSS WEIGHT	113	Lbs
PACKING SIZE	19,68xL22,05xH33,86	inch
NOISE LEVEL	<60	dB(A)

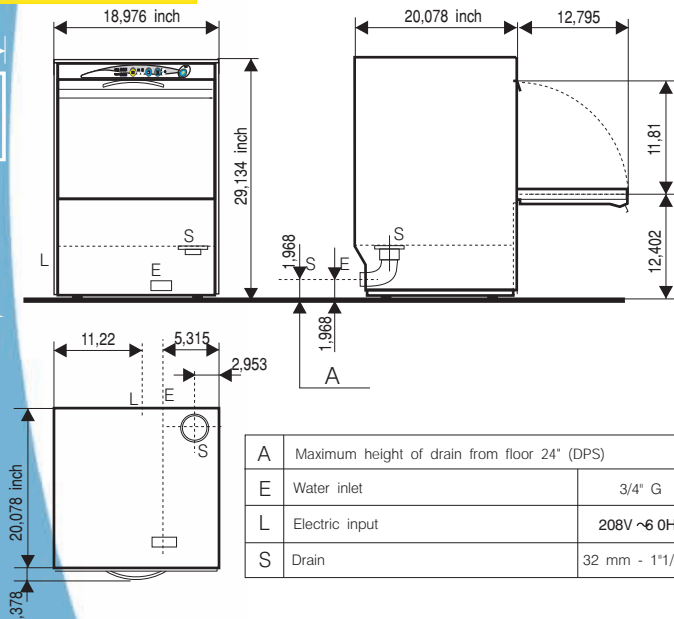

A	Maximum height of drain from floor 24" (DPS)	
E	Water inlet	3/4" G
L	Electric input	208V ~6 0Hz
S	Drain	32 mm - 1"1/4 G

The manufacturer reserves the right to make modifications of materials and models without warning.