

LVPO F1 Starter Kit

For small to midsize Foodservice operators, the LVPO line are the filtration systems that provide flexible installation, easy maintenance, optimal flow rate and capacity performance with a boost option that ensures consistent beverage quality

SHURflo®

APPLICATIONS

Fountain

Ice

Coffee

FEATURES & BENEFITS

Designed for versatile installation capabilities

Fiberdyne media for right sized capacity and flow rates for lower volume accounts

Optional water boost to ensure consistent flow and pressure

Chlorine Taste & Odor and Particulate reduction



LVPO F1 Starter Kit: 94-751-00

LVPO F1 Replacement: 94-399-00

SPECIFICATIONS

Overall dimensions: 3.3"H x 16.1"W x 3.3"D

Inlet Connections: 3/8" NPT

Outlet Connections: 3/8" NPT

Service Flow Rate: 3.0 GPM (11.35 LPM)

Rated Capacity: 6,000 Gallons (22,712 Liters)

Pressure Requirements: 20-125 psi (1.4-8.2 bar)

Temperature: 40-100°F (4.4-37.8°C)

Shipping Weight:

Operating Weight:

SHURflo Inline Water Filter Systems are warranted to be free of defects in material and workmanship, under normal use, for a period of one (1) year from the date of manufacture OR one (1) year of use, with proof of purchase. This limited warranty will not exceed two (2) years, in any event.

The limited warranty will not apply to Inline Water Filter Systems that were improperly installed, misapplied, or incompatible with fluids or components not manufactured by SHURflo. Inline Water Filter System failure due to foreign debris is not covered under the terms of this limited warranty. SHURflo will not warrant any Inline Water filter System which is modified outside the SHURflo factory.

Returns are to be shipped postage prepaid to either service center; SHURflo Cypress, CA or Hanover Park, IL. SHURflo shall not be liable for freight damage incurred during shipping.

LVPO F1 Starter Kit

94-751-00



INSTALLATION TIPS

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after this system.

Filter must be protected against freezing, which can cause cracking of the filter and water leakage.

Install this filter on cold water lines only. Do not use on water lines exceeding 100°F (37.2°C). Minimum water pressure of 20 psi (1.4 bar) and a maximum water pressure of 125 psi (8.62 bar) is required.

When installing behind an appliance use ample amount of tubing to allow removal of the appliance to prevent damage to the tubing, filter or fittings. Damage to tubing, filter or fittings could cause leakage and damage.

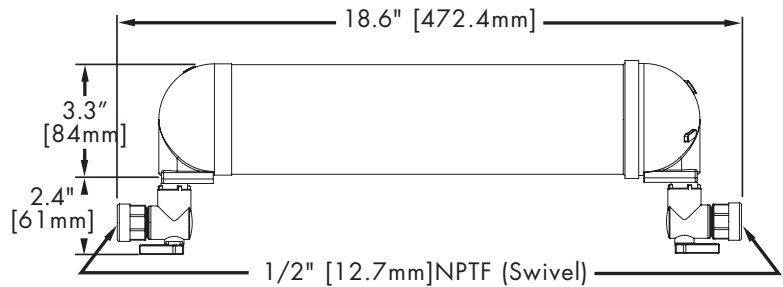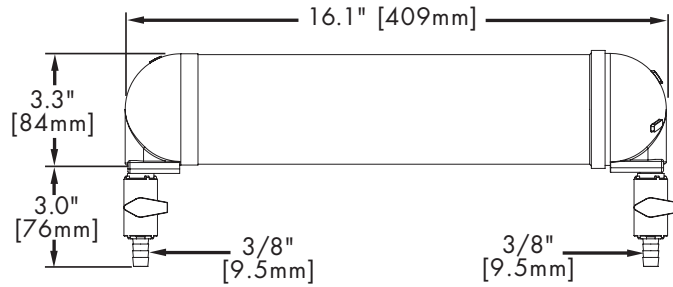

The LVPO-F1 System is Tested and Certified by NSF International against NSF/ANSI Standard 42 for the reduction of Chlorine Taste & Odor.

SHURflo reserves the right to update specifications, change prices, or make substitutions without notice.

94-751-00 LVPO-F1

JA10

Everpure-Shurflo India
A-25
Mohan Co-operative Industrial Estate
Mathura Road
New Dehli, 110 044
INDIA
TEL: 011.661.188.00
FAX: 011.661.188.22

Everpure-Shurflo Japan LLC
Hashimoto MN Bldg. 7F
3-25-1 Hashimoto Sagami-hara-Shi
Kanagawa 229-1103
JAPAN
TEL: 81.(0)42.775.3011
FAX: 81.(0)42.775.3015

Everpure-Shurflo China
21F Cloud 9 Plaza, No 1118,
West Yan'an Road, Changning District
Shanghai, 200052
CHINA
TEL: 86.21.3211.4588
FAX: 86.21.3211.4580

SHURflo®

First in Fluid Innovation

Visit our website at www.shurflo.com

Pentair Filtration Solutions, LLC
World Headquarters-Everpure/Shurflo
North and South America Sales
1040 Muirfield Dr.
Hanover Park, Illinois 60133
USA
TEL: 800.323.7873 (US only)
TEL: 630.307.3000
FAX: 630.307.3030

Everpure-Shurflo Australia
2 Redwood Drive
Notting Hill
Victoria, 3168
AUSTRALIA
TEL: 011.61.39.574.4000
FAX: 011.61.39.562.7237

Everpure-Shurflo Southeast Asia
18 Boon Lay Way
#04-110/111
TradeHub 21, 609966
SINGAPORE
TEL: 65.6795.2213
FAX: 65.6795.2219

Everpure-Shurflo Europe bvba
Industriepark Wolfstee
Toekomstlaan 30
B-2200 Herentals
BELGIUM
TEL: +32.(0).14.283.500
FAX: +32.(0).14.283.505