

IN-9 CF-S In-line Filter

S P E C I F I C A T I O N S

Overall Dimensions:

Length: 11"

Diameter: 2.5"

Inlet connection: 1/4"

Outlet connection: 1/4"

Capacity: 1,500 gallons

Service Flow Rate: Maximum 0.75 gpm (2.8 Lpm)


Pressure Requirements: 10 - 125 psi (0.7 – 8.6 bar), non-shock

Temperature: 35 - 100°F (2 - 38°C)

Operating Weight: 1.0 lbs.

No electrical connection required

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

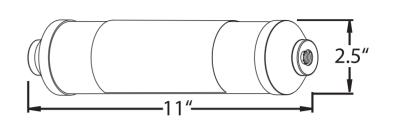

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



System Tested and Certified by NSF International against ANSI/NSF Standard 42 for the reduction of:

Standard No. 42: Aesthetic Effects Chemical Unit Taste and Odor Reduction Chlorine Reduction Nominal Particulate Reduction, Class III



EVERPURE, LLC 1040 Muirfield Drive Hanover Park, Illinois 60133 Toll Free (800) 323-7873 Tel (630) 307-3000 Fax (630) 307-3030 http://www.everpure.com In Europe: N.V. EVERPURE (EUROPE) S.A. Industriepark Wolfstee Toekomstlaan 30 B-2200 Herentals Belgium Tel 32 -14-283500 Fax 32-14-283505 In Japan: EVERPURE JAPAN LLC Hashimoto MN Bldg. 7F 3-25-1 Hashimoto Sagamihara-Shi Kanagawa 229-1103 Japan Tel 81-(0)42-775-3011 Fax 81-(0)42-775-3015