Evo, Inc. Project: 8140 SW Nimbus Ave., Bldg 5 Location: Beaverton, OR 97008 _____ Qty: __ P 503-626-1802 • F 503-213-5869 Item #: ____ Model #: www.evoamerica.com **Evo® Professional Tabletop** 10-0020 Model#



SHORT FORM SPECIFICATIONS:

The Evo Professional Tabletop has a 30" (762mm) diameter black seasoned steel cook surface heated underneath by inner and outer gas tube burners. Surface temperatures range from 225% to 550% (121% to 288%) from the center to the outside edge. A stainless steel drip pan completely surrounds the underside of the cook surface catching all food debris. *The* Evo Professional Tabletop *is* an ideal solution for any outdoor display cooking application. Available with either Natural Gas or LP Propane.

Gas Display Cooking Station

OUTDOOR

Circular Presentation Cooktop Designed For Fast Temperature Recovery and Variable Heat Control

- 30" (762mm) circular black seasoned steel cooking surface.
- Two circular temperature zones: inner and outer surface.
- Variable temperatures 225°F to 550°F (121°C to 288°C). With LP Propane gas 48,000 BTUs.
- .
- With Natural Gas 48,000 BTUs.
- Knobs separately control inner and outer • burners.
- Electronic push button ignition.
- LP Propane gas standard, and Natural Gas option.

Designed For On and Off Premise Display Cooking

- Easy setup on folding banquet table. Heat shield prevents heat from
- damaging table top. Extra long gas hose allows concealment
- of gas tank. Quick release removable cook surface and drip pan.
- Stackable design for convenient transport.

Easy Operation, Easy Maintenance, Easy Cleanup

- Food service staff skill level: Intermediate.
- Cooking techniques: sauté, braise, flattop (plancha) grilling, pan fry, roast, poach, steam, toast.
- Cooking surface is extremely durable and easy to clean.
- Stainless steel burners are protected against spill overs.
- Stainless steel drip pan surrounds cook surface with side mounted spill collection trav.

Data

Data						
	Cook	Dimensions		BTU	Net	Ship
Model	Surface	Н	W	Rate	Weight	Weight
10-0020	30 Inches	14″ 356mm	40″ 1016mm	NG 48,000 LP 48,000	117 lbs 53 kg	181 lbs 82 kg

Limited

1 YEAR Warranty

Due to ongoing product improvement, specifications are subject to change without notice.



NSF



Approvals:


Available At:

SIS#


10-002



Evo® Professional Tabletop

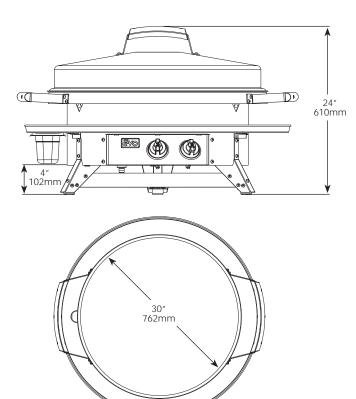

PP

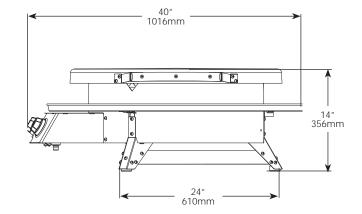



INSTALLATION REQUIREMENTS
Cooking surface must be instal

Cooking surface must be installed level. Outdoor installation with minimum 12" (305mm) to adjacent combustible construction extended above the top of the appliance: 12" (305mm) from sides and 12" (305mm) from back.	
NATURAL GAS CONNECTION OPERATING PRESSURE No regulator, connect to an outlet pressure of 7" water column. INLET / SUPPLY CONNECTION 1/2" FNPT. 12' Hose with 1/2" FNPT Quick Disconnect Supplied. 1/2" NPT to 3/8" Flare supplied. BTUS: 48,000 CONNECTION LOCATION Under Front Control Panel.	LP PROPANE CONNECTION OPERATING PRESSURE Regulator is set for an outlet pressure of 11" water column. <u>INLET / SUPPLY CONNECTION</u> 1/2" FNPT Inlet. 5' Hose & Regulator with QCC1 Supplied. 1/2" NPT to 3/8" Flare supplied. <u>BTUS:</u> 48,000 <u>CONNECTION LOCATION</u> Under Front Control Panel.
DIMENSIONS	WEIGHT
DIMENSIONS MAXIMUM (H X W) 24" x 40" with hood (610mm x 1016mm) 14" x 40" without hood (356mm x 1016mm) <u>COOK SURFACE</u> 30" diameter (762mm)	WEIGHT NET: 117 lb EST. (53 kg) SHIP: 181 lb EST (82 kg) CRATE DIMENSIONS: 40" x 40" x 34" (1016mm x 1016mm x 864mm)
<u>MAXIMUM (H X W)</u> 24" x 40" with hood (610mm x 1016mm) 14" x 40" without hood (356mm x 1016mm) <u>COOK SURFACE</u>	NET: 117 lb EST. (53 kg) SHIP: 181 lb EST (82 kg)