



OPEN TOP PREP. TABLES

Back Mounted Condensing Unit

EOTP – Series

• EOTP1 • EOTPS2 • EOTP2 • EOTPW2 • EOTP3

Cabinet Construction

Heavy duty stainless steel interior and exterior, galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop and top lids. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installation around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Back mounted condensing unit
- Oversized condenser and evaporator coil cools to set and maintain temperature in minimum time period
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure temperature recovery
- Slide-out condensing unit for convenient repair and maintenance
- Front air breathing for built-in applications
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief port located at housing interior for rapid re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gasket for easy replacement
- Heavy duty recessed door handles for a flat surface

Preparation Area

- Mega-top, three rows of pans
- Removable top lids, 1/2" thick foam insulated lids to prevent moisture build-up and heat exchange
- Sanitary PVC pans

Shelving

- One epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 33°F to 41°F
- Easy to set dial thermostat control

Option

- 8 1/2" deep cutting board



EOTP1



EOTPS2



EOTP2



EOTPW2



EOTP3

<ul style="list-style-type: none"> • Project / Customer _____ • Item No. _____ • Model No. _____ 	<p>Warranty</p> <p>5 Year — Compressor Warranty 3 Year — Parts & Labor Warranty Applicable to units purchased after July 1, 2014</p>	<p>Please visit our website for updated Energy Efficiency information</p> <p>201 W. Artesia Blvd, Compton, CA 90220 T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524 www.EVERESTref.com</p>
---	---	--

OPEN TOP PREP. TABLES

Back Mounted Condensing Unit





EVEREST REFRIGERATION

EOTP – Series


• EOTP1 • EOTPS2 • EOTP2 • EOTPW2 • EOTP3

Dimensions


SIDE VIEW

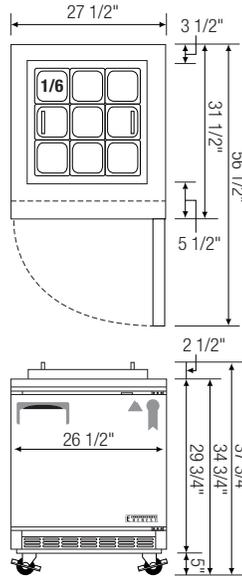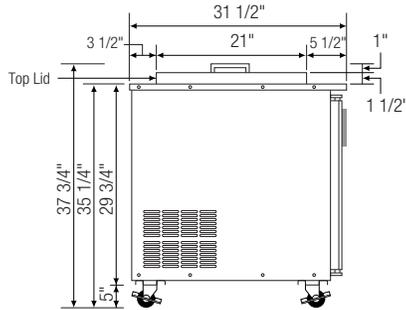


▲ EOTP1

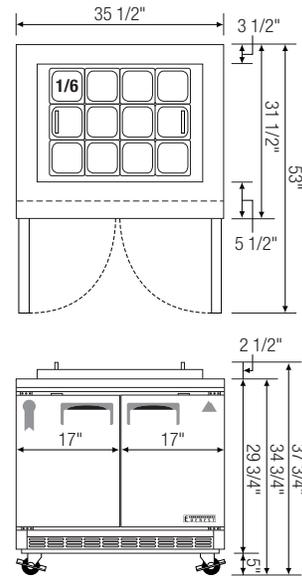


▲ EOTPS2

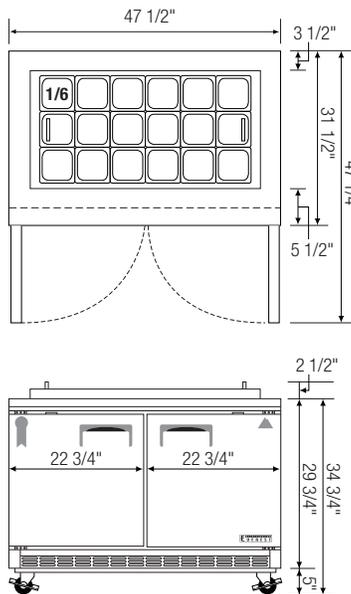

▲ EOTP2

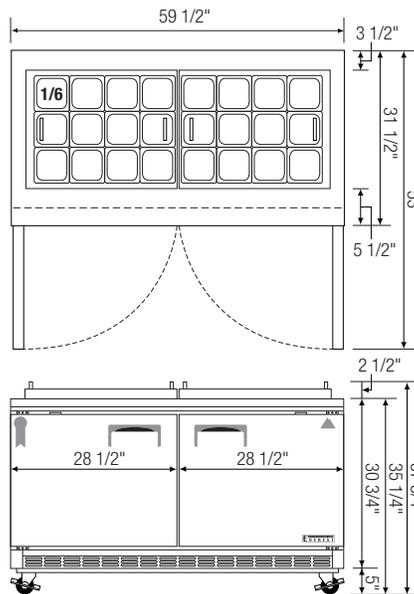

▲ EOTPW2

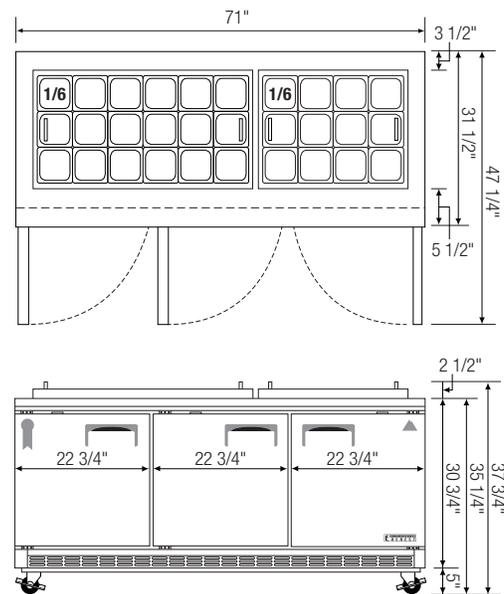

▲ EOTP3

Model	Ref/ Fzr/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	# of Top Lids	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			* Height does not include 5" for caster. Height includes top lid and handle Ref = Refrigerator Fzr = Freezer Dual = Ref & Fzr Combo
												L	D	H *	
EOTP1	Ref	1	6.5	1/6	R-134A	1	1	1/6 X 9	115-60-1	4.00	206	27 1/2	31 1/2	33 1/4	
EOTPS2	Ref	2	8.5	1/6	R-134A	2	1	1/6 X 12	115-60-1	4.20	244	35 1/2	31 1/2	33 1/4	
EOTP2	Ref	2	11.8	1/4	R-134A	2	1	1/6 X 18	115-60-1	4.20	292	47 1/2	31 1/2	33 1/4	
EOTPW2	Ref	2	15	1/3	R-134A	2	2	1/6 X 24	115-60-1	5.01	328	59 1/2	31 1/2	33 1/4	
EOTP3	Ref	3	18.3	1/3	R-134A	3	2	1/6 X 30	115-60-1	5.20	393	71	31 1/2	33 1/4	

Disclaimer: Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.

Specifications subject to change without notice.

www.EVERESTref.com

201 W. Artesia Blvd, Compton, CA 90220
T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524