



DOOR & DRAWER COMBO UPRIGHT REACH-INS

Top Mounted Condensing Unit

ES – Series

- ESR1D2 • ESR2D2 • ESR2D4 • ESRF2D2 • ESWQ2D2

Cabinet Construction

Heavy duty stainless steel interior and exterior, and galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door and drawer heater installation around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Self-contained condensing unit located at top of cabinet for high performance
- Oversized condenser and evaporator coil cools to set and maintain temperature in minimum time period
- Forced-air cooling with dual evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A and R-404A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt heater, both time and temperature terminated for fail-safe backup
- Automatic evaporator fan motor delay on defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan located at bottom of cabinet constructed of anodized aluminum
- Two pressure relief ports located at exterior back wall and top of cabinet for rapid re-entry
- Interior airflow backguard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors & Drawers

- Heavy duty stainless steel interior and exterior
 - 2.5" thick high density foamed-in-place polyurethane insulation
 - Rounded corners for a sleek and modern appearance
 - Heavy duty adjustable torsion spring self-closing door system
 - One piece snap-in magnetic door and drawer gasket for easy replacement
 - Heavy duty recessed door and drawer handles for a flat surface
 - Heavy duty 304 stainless steel drawer frames with low-friction bearing slides
 - Door locks
- (Note: refer to the website for *pan configurations*)

Lighting

- Safety shielded incandescent interior lighting

Shelving

- Three epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F for refrigerators and -4°F for freezers
- Temperature setting range from 33°F to 54°F for refrigerators and -10° F to 54° F for freezers
- Easy to read digital temperature display
- Easy to program push bottom temperature control
- Microchip digital monitoring system with a variety of functions to monitor and maintain optimum temperature



ESR1D2




ESR2D2



ESR2D4



ESRF2D2
(Dual Temp)

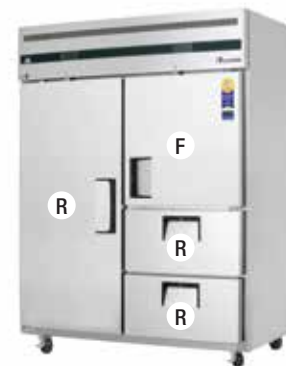

ESWQ2D2
(Dual Temp)

<ul style="list-style-type: none"> • Project / Customer _____ • Item No. _____ • Model No. _____ 	<p>Warranty</p> <p>5 Year — Compressor Warranty 3 Year — Parts & Labor Warranty Applicable to units purchased after July 1, 2014</p>	<p>Please visit our website for updated Energy Efficiency information</p> <p>201 W. Artesia Blvd, Compton, CA 90220 T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524 www.EVERESTref.com</p>
---	---	--

DOOR & DRAWER COMBO UPRIGHT REACH-INS

Top Mounted Condensing Unit




EVEREST
REFRIGERATION


ES – Series

• ESR1D2 • ESR2D2 • ESR2D4 • ESRF2D2 • ESWQ2D2









Dimensions



Two additional front adjustable stainless steel clad ABS legs for model ESR1D2 to prevent movement of unit when opening and closing a door

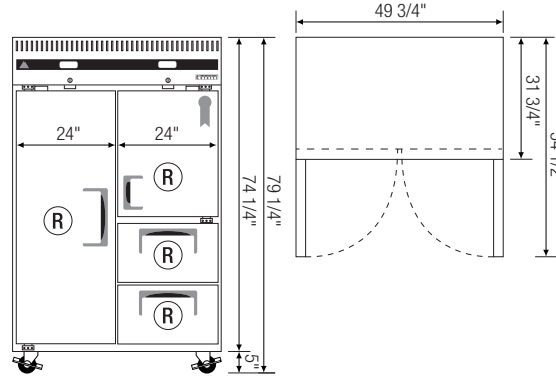

▲ ESR2D2



▲ ESR1D2

▲ ESR2D4

▲ ESRF2D2
(Dual Temp)

▲ ESWQ2D2
(Dual Temp)

Model	Ref/ Fzr/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			* Height does not include 5" for caster. Drawer pans are not included in the products. Ref = Refrigerator Fzr = Freezer Dual = Ref & Fzr Combo H = Half Door F = Full Door DR = Drawer
										L	D	H*	
ESR1D2	Ref	1(H) 2(DR)	23	1/3	R-134A	1	115-60-1	4.94	328	29 1/4	31 3/4	74 1/4	
ESR2D2	Ref	1(F) 1(H) 2(DR)	48	1/3	R-134A	4	115-60-1	5.30	423	49 3/4	31 3/4	74 1/4	
ESR2D4	Ref	2(H) 4(DR)	48	1/3	R-134A	2	115-60-1	5.30	465	49 3/4	31 3/4	74 1/4	
ESRF2D2	Dual	1(F) 1(H) 2(DR)	22(Ref) 22(Fzr)	1/3(Ref) 1/2(Fzr)	R-134A(Ref) R-404A(Fzr)	4	115-60-1	12.49	494	49 3/4	31 3/4	74 1/4	
ESWQ2D2	Dual	1(F) 1(H) 2(DR)	39(Ref) 13(Fzr)	1/3(Ref) 1/3(Fzr)	R-134A(Ref) R-134A(Fzr)	4	115-60-1	12.24	573	59	31 3/4	74 1/4	

Disclaimer: Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.

Specifications subject to change without notice.

www.EVERESTref.com

201 W. Artesia Blvd, Compton, CA 90220
T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524