

UPRIGHT REACH-IN DUAL TEMPS

Top Mounted Condensing Unit



EVEREST REFRIGERATION

www.EVERESTref.com

ES – Series

• ESRFH2 • ESRF2A • ESWRF2 • ESWQ3 • ESRF3



ESRFH2



ESRF2A



ESWRF2



ESWQ3



ESRF3

Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Self-contained condensing unit located at top of cabinet for high performance
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A and R-404A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Exterior anodized aluminum drain pan for self sufficient condensation removal
- Two pressure relief ports for rapid cabinet re-entry
- Interior airflow back guard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles
- Door locks
- Field reversible doors (*available from 2013 models*)

Lighting

- Shielded incandescent interior lighting

Shelving

- Epoxy coated wire shelves (*see reverse page for shelf quantity*)
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F for refrigerators and -4°F for freezers
- Temperature setting range from 33°F to 54°F for refrigerators and -10° F to 54° F for freezers
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature

UPRIGHT REACH-IN DUAL TEMPS (TOP MOUNT)

• Project / Customer _____

• Item No. _____

• Model No. _____

Warranty

5 Year — Compressor Warranty
3 Year — Parts & Labor Warranty
Applicable to units purchased after July 1, 2014.

Contact

201 W. Artesia Blvd, Compton, CA 90220
T. (310) 323-6586, (800) 444-6285
F. (310) 323-7524, (310) 761-1127

UPRIGHT REACH-IN DUAL TEMPS


Top Mounted Condensing Unit











ES – Series

• ESRFH2 • ESRF2A • ESWRF2 • ESWQ3 • ESRF3

Dimensions



Two additional front adjustable stainless steel clad ABS legs for model ESRFH2 to provide extra stability when opening and closing doors.

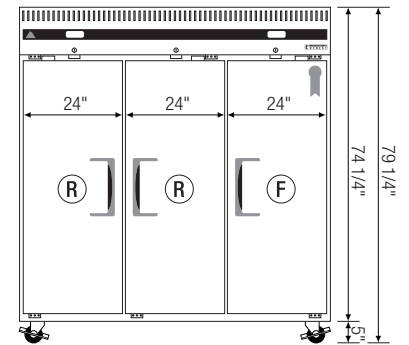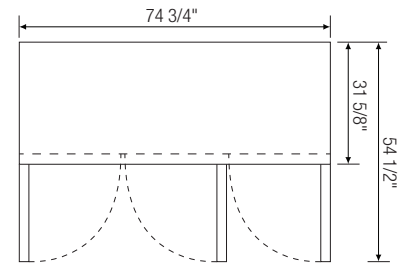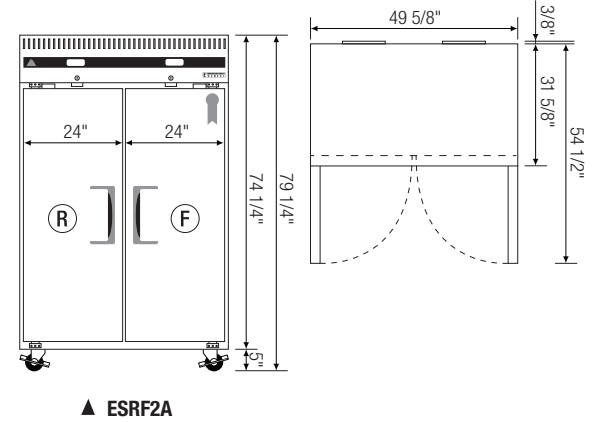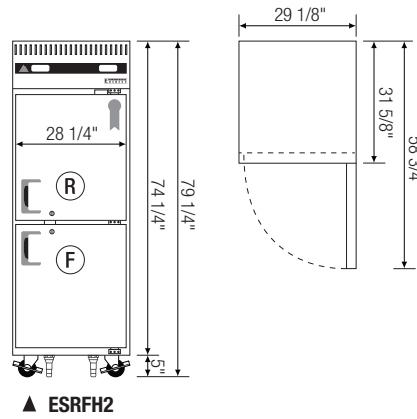

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			* Height does not include 5" for casters Ref = Refrigerator Frz = Freezer Dual = Ref & Frz Combo H = Half Door F = Full Door
										L	D	H *	
ESRFH2	Dual	2(H)	11(Ref) 11(Frz)	1/2+	R-404A	2	115-60-1	7.57	329	29 1/8	31 5/8	74 1/4	
ESRF2A	Dual	2	22(Ref) 22(Fzr)	1/3(Ref) 1/2+(Fzr)	R-134A(Ref) R-404A(Fzr)	6	115-60-1	11.94	478	49 5/8	32	74 1/4	
ESWRF2	Dual	2	26(Ref) 26(Frz)	1/3(Ref) 1/2+(Frz)	R-134A(Ref) R-404A(Frz)	6	115-60-1	11.94	513	59	31 5/8	74 1/4	
ESWQ3	Dual	2(H) 1(F)	39(Ref) 13(Frz)	1/3(Ref) 1/3(Frz)	R-134A(Ref) R-134A(Frz)	5	115-60-1	11.94	510	59	31 5/8	74 1/4	
ESRF3	Dual	3	46(Ref) 22(Frz)	1/3(Ref) 1/2+(Frz)	R-134A(Ref) R-404A(Frz)	9	115-60-1	12.39	612	74 3/4	31 3/4	74 1/4	

Disclaimer: Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.