SIDE MOUNT GLASS DOOR UNDERCOUNTER REFRIGERATORS



Side Mounted Condensing Unit

ETG – Series

• ETGSR2 • ETGR2 • ETGWR2

Cabinet Construction

Heavy duty stainless steel interior and exterior, and galvanized steel finished bottom and back wall of exterior. High quality 16 gauge stainless steel worktop, ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes).

Refrigeration System

- Side mounted condensing unit for extra interior space use compared to back mounted units
- Oversized condenser and evaporator coil cools to set and maintain temperature in minimum time period
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Removable condenser coil air filter for easy cleaning
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost, temperature initiated and terminated
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pressure relief port located at housing interior for rapid re-entry
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors

- Grey PVC door frames standard from June, 2013
- Low emitting double pane glass system reflects UV rays and improves insulation for maximized energy efficiency
- Removable doors and stainless steel door tracks for easy cleaning

Lighting

 Safety shielded vertical LED interior lighting with on/off switch for energy saving, less heat generation and enhanced illumination

Shelving

- Two epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 33°F to 41°F
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital monitoring system with a variety of functions to monitor and maintain optimum temperature

Option

- 4" high stainless steel backsplash for worktop use







ETGR2



SIDE MOUNT GLASS DOOR UNDERCOUNTER REFRIGERATORS


Side Mounted Condensing Unit


ETG – Series


• ETGSR2 • ETGR2 • ETGWR2




Dimensions

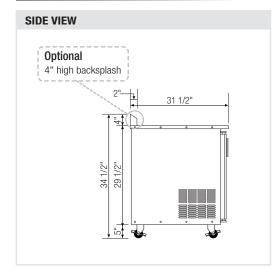





▲ ETGSR2

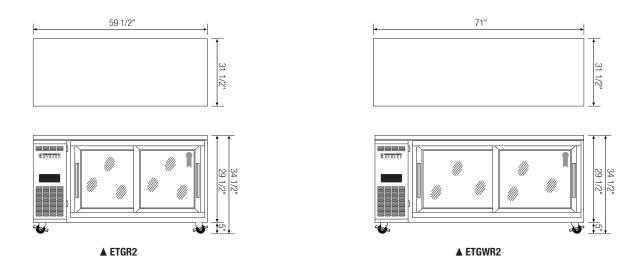

ETGSR2 Ref 2 (Sliding) 13 1/5 R-134A 4 115-60-1 4.08 282 47 1/2 31 1/2 29 1/2 Ref = Refrigerator Fzr = Freezer Dual = Ref & Fzr Co ETGR2 Ref 2 (Sliding) 18 1/5 R-134A 4 115-60-1 4.13 339 59 1/2 31 1/2 29 1/2 Ref = Refrigerator Fzr = Freezer Dual = Ref & Fzr Co	Model	Ref/ Fzr/	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions (Inches)			* Height does not
ETGSR2 Ref 2 (Sliding) 13 1/5 R-134A 4 115-60-1 4.08 282 47 1/2 31 1/2 29 1/2 Fzr = Freezer Dual = Ref & Fzr Co		Dual	D0015	(00.11.)		. J	Sileives	(v-112=F11)		(LBS)	L	D	Н*	include 5" for caster.
	ETGSR2	Ref	2 (Sliding)	13	1/5	R-134A	4	115-60-1	4.08	282	47 1/2	31 1/2	29 1/2	Fzr = Freezer
	ETGR2	Ref	2 (Sliding)	18	1/5	R-134A	4	115-60-1	4.13	339	59 1/2	31 1/2	29 1/2	
ETGWR2 Ref 2 (Sliding) 23 1/3 R-134A 4 115-60-1 4.89 390 71 31 1/2 29 1/2	ETGWR2	Ref	2 (Sliding)	23	1/3	R-134A	4	115-60-1	4.89	390	71	31 1/2	29 1/2	

isclaimer: Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.

www.EVERESTref.com

201 W. Artesia Blvd, Compton, CA 90220 T. (310) 323–6586, (800) 444–6285 F. (310) 323–7524