

MODEL: FI-72W

Item # _____

ALL PURPOSE DISHWASHER

Clear ideas; brilliant results.

Standard Features

- Heavy duty stainless steel construction, Type 304
- Auto-fill
- Built-in detergent pump
- Built-in electric booster heater
- Utilizes fresh hot water rinse
- Electric tank heater
- Low water tank heat protection
- Hi-limit thermostat
- Built-in rinse aid dispenser
- Standard 20" x 20" racks
- Door safety switch
- Built-in hot water assurance
- 16.5" clearance and a special designed rack to handle trays
- Fully automatic wash and rinse cycle with correct temperature indicators for consistent cleaning
- Removable front electrical panel for easy access to controls
- Vacuum breaker
- Stainless steel non-clogging individual wash and rinse arms
- Wash tank with filter and tray system
- Adjustable legs
- Ideal for churches, retirement communities, schools, and nursing homes
- Standard with:
 - (1) CT-10 All purpose rack
 - (1) CP-16/18 Peg rack
 - (1) CB-7 Tray rack

Options and Accessories

- ☐ CT-10 All purpose rack
- ☐ CU-20 Cutlery grid
- ☐ CP-16/18 Peg rack
- ☐ CB-7 Tray rack
- ☐ Cutlery containers



PERFORMANCE / CAPACITIES

Capacities

Racks per hour	30
Dishes per hour	750
Glasses / cups per hour	1080
Trays per hour	210
Wash Tank	6.6 gal. / 24.9 litre

Water Consumption / Requirements

Gallons per hr. (Max. use)	27 gal. / 102 litre
Gallons per cycles	.9 gal. / 3.40 litre
Inlet temperature (Optimum)	140°F / 60°C
Flow rinse pressure	15 – 25 PSI

Wash Pump Motor

Motor (hp)	1 hp
------------	------

Temperatures

Wash	150° F / 66° C
Rinse	190° F / 88° C

Heating

Electric wash tank heater	2.8 kw
Electric booster heater	6 kw

Operating Cycles

Wash time (seconds)	2 setting (70, 160)
Dwell (seconds)	5
Rinse time (seconds)	15
Total Time (seconds)	2 setting (90, 180)

Dimensions / Shipping

Width	24 1/4" / 616 mm
Depth	27 1/2" / 698 mm
Height	52" / 1320 mm
Max. clearance for dishes / glasses	16 1/2" / 420 mm
Shipping weight	180 lbs / 82 kg
Shipping volume (cu. ft.)	20

FAGOR



Fagor Commercial, Inc.
12800 N.W. 38th Avenue • Miami, Florida 33054
PH.: (305) 779-0170 • FAX: (305) 779-0173
Toll Free: 866-GO FAGOR (463-2467)

www.fagorcommercial.com



MODEL: FI-72W

ALL PURPOSE DISHWASHER

SPECIFICATIONS

Construction: The FI-72W is a fully automatic dishwasher completely constructed of high-quality stainless steel, type 304. Both upper and lower wash and rise arms are constructed of stainless steel to ensure a long life span. **Ergonomically designed for ease of loading and unloading racks. A 16.5" door opening to accept larger wares, including trays.**

Controls: Controls are top mounted and accessible for service from the front. Two preset time settings (90 and 180 second) for medium and heavy loads will optimize energy and time.

Filling and heating system: The power-on switch automatically fills the tanks to the proper level. Wash tank water temperature is maintained by a 2.8 kw element. Built-in 6 kw electric booster heater. Safety thermostats and a pressure switch protect heating elements in case of low water or fail.

Hot Water Assurance: The FI-72W guarantees that the minimum sanitizing temperature of 180 °F during the final rinse is achieved regardless of the incoming water temperature. Machine will continue washing up to the rinsing temperature is reached. The rack capacity and cycle time will vary depending on incoming water temperature, voltage of dishmachine and water pressure.

Drainage: Filter system with removable scrap basket, prevents waste from getting into the washing pumps.

SERVICE CONNECTIONS

A – Water inlet – 3/4" Female hose connector on 5' long flexible hose supplied with machine; Adaptor for 3/4" female garden hose fitting also supplied; 140°F / 60°C Optimum water temperature; 15-25 psi flow rinse pressure.

D – Drain – 4' long, 3/4" I.D. flexible hose; Maximum 10" drain height permitted; Indirect connection to drain pipe.

R – Electrical terminal block connection point - 208-240/60/1 or 3ph



E – Electric power supply - Use wire suitable for at least 194°F/90°C

ELECTRICAL AND PRODUCTION LOADS

Volts/Hz/Ph	Amps	Volts/Hz/Ph	Amps
208/60/1	28	208/60/3	16
220/60/1	30	220/60/3	18
240/60/1	32	240/60/3	19

*50 Hz models, consult factory

Incoming Water Temp	140°F	110°F	80°F
Aprox. racks per hour	30	22	15

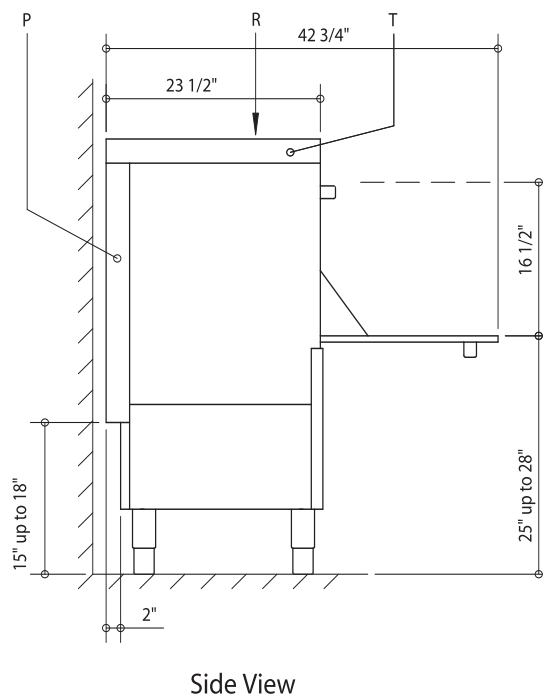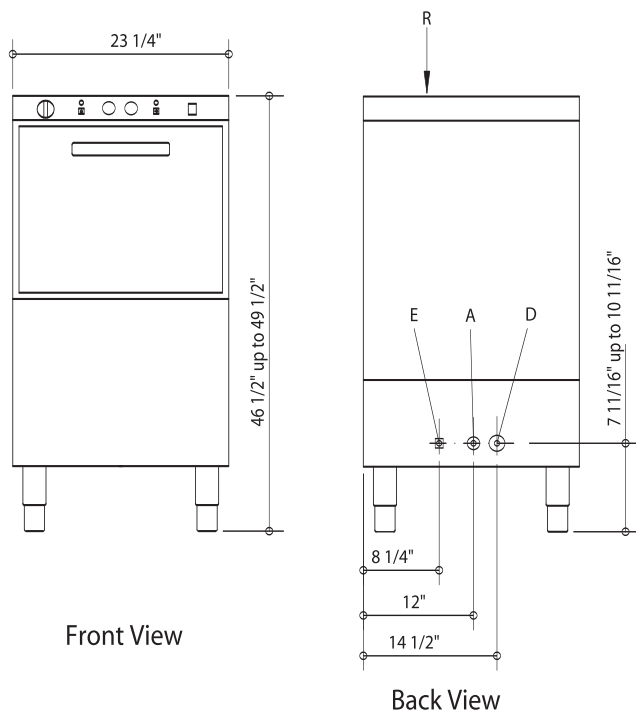

Caution - Before connecting water to this unit, have water supply analyzed to make sure hardness is not greater than 2.0 grains and pH level is within the range of 7.0-8.5. Water which fails to meet these standards, should be treated by the installation of a water conditioner. EQUIPMENT FAILURE CAUSE BY INADEQUATE WATER QUALITY IS NOT COVERED UNDER WARRANTY.

Warning - Installation should be made by qualified personnel who will observe all specified local codes.



Fagor Commercial, Inc.
12800 N.W. 38th Avenue • Miami, Florida 33054
PH.: (305) 779-0170 • FAX: (305) 779-0173
866-GO FAGOR (463-2467)

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice.
Printed in the USA • 09/04