

# Reach-in Refrigerators & Freezers

- QV Series**
- QVR-1
  - QVR-2
  - QVR-1G
  - QVR-2G
  - QVF-1
  - QVF-2



Item # \_\_\_\_\_

## Standard Features

- Our "QV" series of reach-ins are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket to protect your long term investment.
- Air distribution channel on both single and double door freezers for proper temperature thru out the cabinet.
- Refrigerators maintain product temperatures from 33° to 38°F / freezers: -8°F, includes automatic defrost for the best temperatures in food preparation.
- Accepts all basic pan sizes including 18" x 26" bun pans.
- Enhanced digital controller with Energy Savings feature refrigerators and freezers to keep food quality for longer period of time.
- 2-3/8" CFC-Free polyurethane insulation; foamed in place including our mullions on double doors for added strength and energy efficiency.
- Glass doors units are dual pane with aluminum frames and LED lighting for greater visibility of your products.



QVR(F)-1



QVR(F)-2



QVR-1G



QVR-2G

### Options & Accessories

- 6" adjustable legs (set of 4)
- Epoxy coated shelves
- Factory reverse hinging
- Stainless steel back panel
- 220 volts / 50 cycles / 1 phase



\* Conforms to UL & NSF-7 standards

ISO -9001

	Refrigerator											Shipping		
	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions L D *H			Wt. / Cubes	
	QVR-1	1	24.5	3	5.6	1/4	115/60/1	5-15P	8'	27-1/2" (698.5 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	295 (134 kg)	51 (1.44 m <sup>3</sup> )
	QVR-1G	1	24.5	3	6.0	1/4	115/60/1	5-15P	8'	27-1/2" (698.5 mm)	32" (813 mm)	79-1/2" (2019.3 mm)	315 (142.8 kg)	51 (1.44 m <sup>3</sup> )
	QVR-2	2	52	6	6.9	1/3	115/60/1	5-15P	8'	55-1/2" (1409.7 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	475 (222.1 kg)	95 (2.69 m <sup>3</sup> )
	QVR-2G	2	52	6	7.3	1/3	115/60/1	5-15P	8'	55-1/2" (1409.7 mm)	32" (813 mm)	79-1/2" (2019.3 mm)	505 (229 kg)	95 (2.69 m <sup>3</sup> )
Freezer	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions L D *H			Shipping (Wt. / Cubes)	
	QVF-1	1	24.5	3	8.5	3/4	115/60/1	5-15P	8'	27-1/2" (698.5 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	295 (134 kg)	51 (1.44 m <sup>3</sup> )
	QVF-2	2	52	6	12.9	1	115/60/1	5-15P	8'	55-1/2" (1409.7 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	475 (222.1 kg)	95 (2.69 m <sup>3</sup> )

\* Height does not include 4" castors (5" overall) or 6" for legs.  
 \*\*All specifications are subject to change without notice

## Specifications QV Series

### Construction

Heavy duty stainless steel exterior front and sides. Aluminum top and galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved cornered floor. Door is heavy duty stainless steel exterior and stainless steel interior, step design with stainless steel hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self-closing and with 90° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation. Glass door units have a dual pane glass, thermal insulated with heavy duty aluminum frame and door handle. Unit comes complete with a 2-3/8" CFC-Free polyurethane insulation, foamed in place. Air distribution channel on both single and double door freezers. Interior

incandescent light with safety shield per section outside the food zone and activated by door rocker switch. Glass doors units have full height LED lighting along the side.

### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a freezers) Bottom mount condensing unit on a rail system for easy access. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38° F and freezers -10° F to 0° F during normal operations.

Energy savings digital controllers and

thermostats. Automatic defrost, time initiated.

### Shelving


(3) Epoxy coated shelving per door with channel slides for supports. Adjustable in 2" increments per shelf.

### Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

### Warranty

(36) month labor and parts warranty. 5 year total compressor warranty (Continental U.S.A. & Canada only).

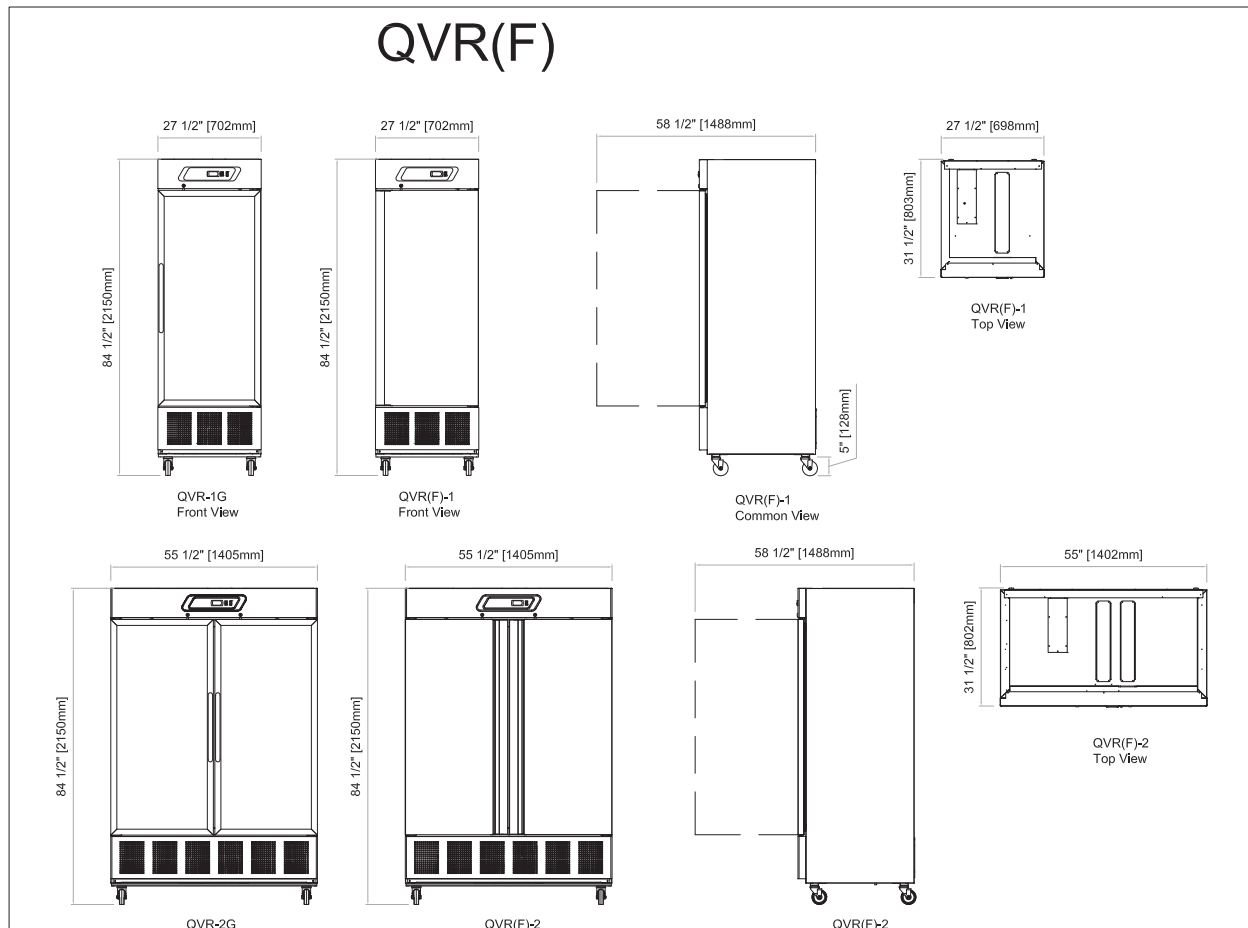

The manufacturer reserves the rights to modify materials and specifications without notice.

Printed in the USA • 04/14